


DS-2CE56C2T-IT1/IT3 HD720P Turbo HD EXIR Turret Camera




EXIR

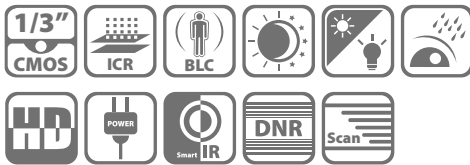

Key features

- HD720P Video Output
- Adopt HDTVl Technology
- True Day/Night, Smart IR
- EXIR technology, 20/40m IR distance
- IP66 weatherproof

Dimensions

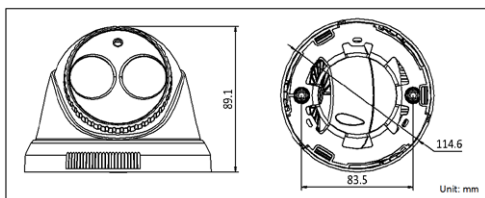

Accessories



Indoor / outdoor wall mount
DS-1272ZJ-110

Indoor wall mount
DS-1258ZJ

Video balun
DS-1H18

Available models

DS-2CE56C2T-IT1
DS-2CE56C2T-IT3

| | DS-2CE56C5T-IT1 | DS-2CE56C5T-IT3 |
|--------------------------------|---|---|
| Camera | | |
| Image Sensor | 1 / 3" Progressive Scan CMOS | |
| Effective Pixels | 1280(H)*720(V) | |
| Min. Illumination | 0.01 Lux @(F1.2,AGC ON), 0 Lux with IR | |
| Shutter speed | 1/25(1/30) s to 1/50,000 s | |
| Lens | 3.6mm (2.8mm, 6mm, 8mm optional) | 3.6mm (2.8mm, 6mm, 8mm, 12mm, 16mm optional) |
| | Angle of View: 71.43°(3.6mm), 92.45°(2.8mm), 46.9°(6mm), 34.5°(8mm) | Angle of View: 76.88°(3.6mm), 99.73°(2.8mm), 50.1°(6mm), 36.8°(8mm), 24.33°(12mm), 18.4°(16mm) |
| Lens Mount | M12 | |
| Angle Adjustment | Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360° | |
| Day & Night | ICR | |
| Synchronization | Internal synchronization | |
| Video Frame Rate | 25 fps (PAL)/ 30 fps (NTSC) | |
| HD Video Output | 1 Analog HD output | |
| S / N Ratio | More than 52dB | |
| General | | |
| Working Temperature / Humidity | -40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing) | |
| Power Supply | 12 VDC | |
| Power Consumption | Max. 3W | Max. 4.5W |
| Weather Proof Ratings | IP66 | |
| IR Range | Up to 20m | Up to 40m |
| Communication | Up the coax(need UTC controller) Protocol: Pelco-C(Coaxitron) | |
| Dimensions | φ114.6 × 89.1mm(φ4.5" × 3.5") | |
| Weight | 300 g (0.66 lb) | |