



### DS-2DF5286/5284 series 2MP Network PTZ Dome Camera

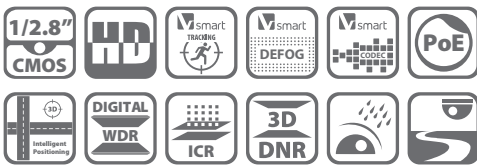

#### Key features

- 1/2.8" Progressive Scan CMOS
- 30X / 20X optical zoom, 16X digital zoom
- Smart Tracking, Defog
- True Day/Night, D WDR, 3D DNR
- 3D intelligent positioning
- Triple stream
- 24VAC / High-PoE power supply
- Outdoor / Indoor

#### Dimensions

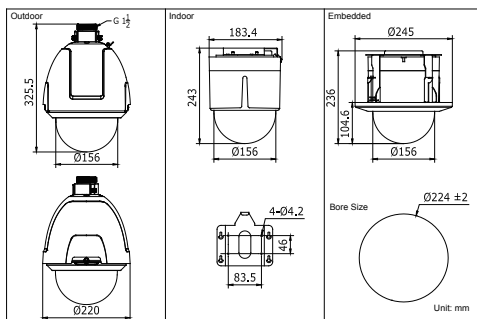

#### Accessories



DS-1601ZJ      DS-1601ZJ-corner      DS-1601ZJ-pole      DS-1634ZJ

#### Available models

- DS-2DF5286-A: 24VAC, outdoor
- DS-2DF5286-AEL: High-PoE & 24VAC, outdoor
- DS-2DF5286-A3: 24VAC, indoor
- DS-2DF5286-AE3: PoE+ & 24VAC, indoor

- DS-2DF5284-A: 24VAC, outdoor
- DS-2DF5284-AEL: High-PoE & 24VAC, outdoor
- DS-2DF5284-A3: 24VAC, indoor
- DS-2DF5284-AE3: PoE+ & 24VAC, indoor

	DS-2DF5286-A/AEL (outdoor) DS-2DF5286-A3/AE3 (indoor)	DS-2DF5284-A/AEL (outdoor) DS-2DF5284-A3/AE3 (indoor)
<b>Camera</b>		
Image sensor	1/2.8" Progressive Scan CMOS	
Effective pixel	2230K pixels	
Min. Illumination	Color : 0.4 lux (F1.6, 1/30 sec, 50 IRE, AGC on), B/W : 0.03 lux (F1.6, 1/30 sec, 50 IRE, AGC on) Color : 0.05 lux (F1.6, 1/1 sec, 50 IRE, AGC on), B/W : 0.005 lux (F1.6, 1/1 sec, 50 IRE, AGC on)	
White balance	Auto / Manual / ATW/Indoor/Outdoor/Daylight lamp/Sodium lamp	
AGC	Auto / Manual	
S / N ratio	≥ 50dB	
Digital noise reduction	3D DNR	
Backlight compensation	HLC / BLC	
Wide dynamic range	Digital WDR	
Shutter speed	50Hz: 1-1/30,000s; 60Hz: 1-1/30,000s	
Day & Night	IR Cut Filter	
Digital zoom	16X	
Privacy masking	24 privacy masks programmable, optional multiple colors and mosaics	
Focus mode	Auto / Semiautomatic / Manual	
Enhancement	Defog	
<b>Lens</b>		
Focal length	4.3 ~ 129mm, 30X optical zoom	4.7 ~ 94mm, 20X optical zoom
Zoom speed	Approx.3s (Optical Wide-Tele)	Approx. 2.7s (Optical Wide-Tele)
Angle of view	65.5 ~ 2.11 degree (Wide-Tele)	58.3 ~ 3.2 degree (Wide-Tele)
Min. Working distance	10 ~ 1500mm(Wide-Tele)	
Aperture range	F1.6 ~ F5.0	F1.6 ~ F3.5
<b>Pan and Tilt</b>		
Smart tracking	Support	
Pan / Tilt range	Pan: 360° endless; Tilt: -5° ~ 90°(Auto Flip)	
Pan / Tilt speed	Pan Manual Speed: 0.1° ~ 300°/s, Pan Preset Speed: 540°/s Tilt Manual Speed: 0.1° ~ 240°/s, Tilt Preset Speed: 400°/s	
Proportional zoom	Rotation speed can be adjusted automatically according to zoom multiples	
Number of preset	256	
Patrol	8 patrols, up to 32 presets per patrol	
Pattern	4 patterns, with the recording time not less than 10 minutes per pattern	
Power-off memory	Support	
Park action	Preset / Patrol / Pattern / Pan scan / Tilt scan / Random scan / Frame scan / Panorama scan	
PTZ position display	Support	
Preset freezing	Support	
Scheduled task	Preset / Patrol / Pattern / Pan scan / Tilt scan / Random scan / Frame scan / Panorama scan/Dome reboot/Self-test action/Alarm output	
<b>Alarm</b>		
Alarm input	7 inputs	
Alarm output	2 relay outputs, alarm response actions configurable	
Alarm trigger	Motion detection, Audio Exception Detection, Dynamic analysis, Tampering alarm, Network disconnect, IP address conflict, Storage exception	
Alarm action	Preset, Patrol, Pattern, SD/SDHC card recording, Relay output, Notification on Client	
<b>Local Video and Audio</b>		
Video output	1.0V[p-p] / 75Ω, NTSC (or PAL) composite, BNC	
Audio input	1 Mic in/Line in interface. Line input: 2-2.4V[p-p]; output impedance: 1KΩ, ±10%	
Audio output	1 Audio output interface. Line level, impedance: 600Ω	
<b>Network</b>		
Ethernet	10Base-T / 100Base-TX, RJ45 connector	
Max. image resolution	1920×1080	
Frame rate	50Hz: 25 fps (1920×1080), 25 fps (1280×960), 25 fps (1280×720) 60Hz: 30 fps (1920×1080), 30 fps (1280×960), 30 fps (1280×720)	
Image compression	H.264 / MJPEG / MPEG4, H.264 encoding with Baseline / Main / High profile	
SVC	Support	
ROI encoding	Support	
Audio compression	G.711u / G.711a / G.726 / MP2L2	
Protocols	IPv4/IPv6, HTTP, HTTPS, 802.1x, Qos, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTP, TCP, UDP, IGMP, ICMP, DHCP, PPPoE	
Simultaneous live view	Up to 10	
Streams	Triple streams	
SD memory card	Built-in micro SD/SDHC Slot, up to 32GB, support manual / alarm / edge recording	
User/Host level	Up to 32 users, 3 Levels: Administrator, Operator and User	
Security measures	User authentication (ID and PW), Host authentication (MAC address), IP address filtering	
<b>Integration</b>		
Application programming	Open-ended API, support Onvif, PSIA and CGI	
Web browser	IE 7+, Chrome 18+, Firefox 5.0+, Safari 5.02+, support multi-language	
<b>General</b>		
RS-485 Protocols	HIKVISION, Pelco-P, Pelco-D, self-adaptive	
Power	-A: 24VAC, max. 40W -AEL: 24VAC, max. 60W / High-PoE, max. 40W -A3/AE3: 24VAC / PoE+, max. 25W	
Working Temperature	-A: -30°C ~ 65°C (-22°F ~ 149°F) / High-PoE: -30°C ~ 65°C (-22°F ~ 149°F) -A3/AE3: -10°C ~ 50°C (14°F ~ 122°F)	
Humidity	90% or less	
Protection Level	IP66, TVS 4,000V lightning protection, surge protection and voltage transient protection IK 10 (optional)	
Dimensions	Φ220×325.5mm (Φ8.66"×12.81") (Outdoor) Φ183.4×243mm (Φ7.22"×9.57") (Ceiling) Φ245×236mm (Φ9.65"×9.29") (In-ceiling)	
Weight	Approx. 5Kg (11.02lbs)	
Mount Option	Long-arm wall mount: DS-1601ZJ; Corner mount: DS-1601ZJ-corner; (outdoor models) Pole Mount: DS-1601ZJ-pole; Power box mount: DS-1634ZJ	

NOTE: Indoor models support ceiling and in-ceiling mount.