

DS-3WF1000-EI-2N/P **2.4GHz 300Mbps 1KM Wireless Bridge Kit**



The dual wireless bridge can be applied in industries, such as wireless video security, railway, transportation, power and other industries, wireless video/data transmission, wireless coverage, carrier wireless backbone network construction, Wi-Fi wireless coverage, rural information construction, and wireless network coverage. The long-distance transmission of the device can guarantee multi-channel HD video transmission.


- Up to 1 Km wireless transmission distance
- 300 Mbps 802.11n wireless bridge
- Built-in 7dBi 2 x 2 MIMO antenna
- Visualized topology management
- Real-Time alarm push technology
- Standard PoE Input & Output
- Plug and Play

▪ Specification

General	
Product Dimensions (W × H × D)	90.8 mm × 187.87 mm × 57.87 mm (3.57" × 7.39" × 2.27")
Package Dimensions (W × H × D)	256 mm × 231 mm × 86 mm (10.07" × 9.09" × 3.38")
Net Weight	0.26 kg (0.57 lb) per device
Gross Weight	1.1 kg (2.43 lb)
Packing List	Wireless Bridge × 2, Binding Tape × 4, Quick Start Guide × 1, Regulatory Compliance and Safety Information × 1, PoE Power Supply × 2, AC Cord × 2
Packing Method	Packing in pairs
Working Temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working Humidity	5% to 95% (no condensation)
Storage Temperature	-40 °C to 80 °C (-40 °F to 176 °F)
Storage Humidity	5% to 95% (no condensation)
Installation Mode	Pole Mounting
Ingress Protection	IP55
Power Consumption	1.8 W for typical (1-ch 2MP IPC), Max. 4.5 W
Wireless Parameter	
Max. Transmission Rate of Air Interface	≤ 300 Mbps
Wireless Standard	IEEE 802.11b/g/n (2 × 2 MIMO 300 Mbps)
Working Frequency Band	2400 MHz ~ 2483.5 MHz
Antenna Gain	7 dBi
Antenna Angle	(H) Beamwidth [3 dB] 60° (V) Beamwidth [3 dB] 50°
Transmitting Power	22 dBm @11n MCS0 (Note: Transmitting power may vary with local regulations.)
Receiving Sensitivity	-87±2 dBm @HT40 MCS0
Throughput Rate	PTP: ,90 Mbps/0.2 KM(HT40),90 Mbps/0.5 KM(HT40),70 Mbps/1 KM(HT40),PTMP(1 to 4): ,40 Mbps/1 KM(HT40)
PoE Power Supply	
PoE Port	AP: LAN1 802.3af/at PoE IN; CPE: LAN1 passive PoE IN, LAN2 802.3 af PoE OUT
PoE Power Budget	10 W
PoE Distance	100 m
Hardware Parameter	
Network Interface	2 × 10/100 Mbps RJ45 ports
LED Indicator	Power indicator, LAN indicator, Signal intensity indicator
Reset	Hardware resetting button
Power Supply	48V PoE; Check the physical interface image below for more details
Software Function	
Application Function	IFM, IPM
Channel Width	10/20/40 MHz
Channel Selection	Auto/manual selection
Security Mode	WPA2-PSK
Security Mechanism	Wireless network name hidden
Network Protocol	NTP (network time synchronization), SADP (auto search for IP address), HTTPS/HTTP (web management), SSH (debugging)
Management Method	HCP, Web, iVMS-4200, HPP
System Log	Syslog, Control center information

Upgrade	Web,iVMS-4200,HCP,HPP
HPP	Support one-click activation and remote management via Hik-Partner Pro. Functions supported: <ol style="list-style-type: none"> 1. Reboot device 2. Restore device 3. Display the topology information 4. Display the connection status between AP and CPEs, including signal intensity, background noise, sending & receiving rate 5. Configure wireless settings, including working mode, SSID, password, channel, channel bandwidth, transmitting power 6. Bridge alignment 7. Spectrum scanning
Approval	
EMC	CE-EMC (EN 55032:2015+A11: 2020, EN IEC 61000-3-2:2019, EN 61000-3-3:2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035:2017+A11: 2020)
Safety	CB (AMD1:2009, AMD2:2013, IEC 62368-1:2014 (Second Edition)), CE-LVD (EN 62368-1:2014+A11: 2017)
Chemistry	CE-RoHS (2011/65/EU),WEEE (2012/19/EU),Reach (Regulation (EC) No.1907/2006)
Radio	EN 301 893,EN 300 440,EN 62311,EN 301 489-3,EN 301 489-17


▪ Typical Application

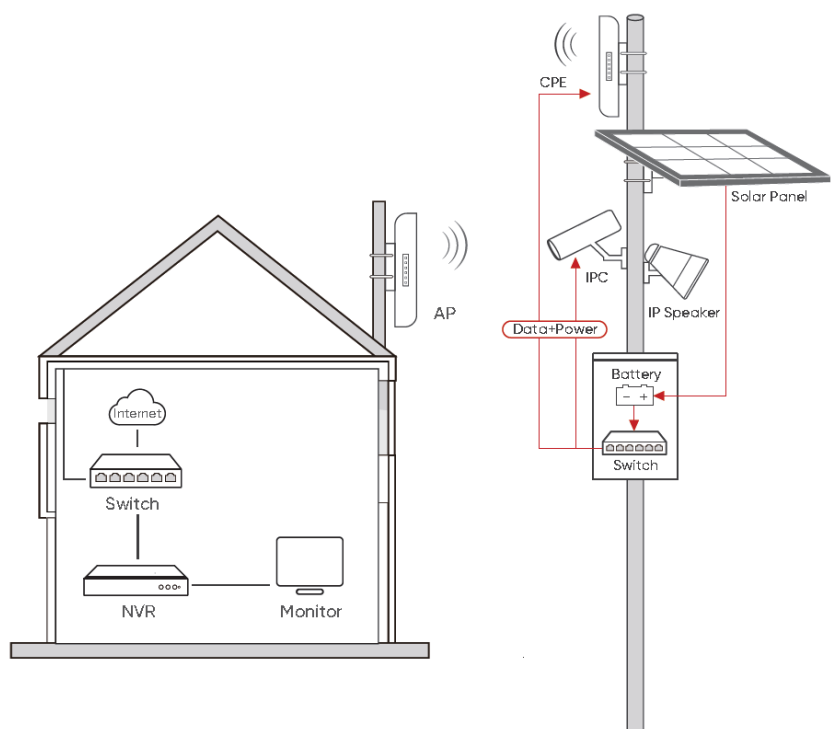

▪ Physical Interface

No.	Interface/Button	Description
1	Standard PoE IN/LAN 1	The 10/100 Mbps adaptive RJ45 port, also can be used as a standard PoE input port.
2	LAN 2	The 10/100 Mbps adaptive RJ45 port.

3	Reset	Long press for 4 seconds to restore to factory settings.
4	Passive PoE IN/LAN 1	The 10/100 Mbps adaptive RJ45 port, also can be used as a passive PoE input port.
5	Standard PoE OUT/LAN 2	The 10/100 Mbps adaptive RJ45 port, also can be used as a standard PoE output port.

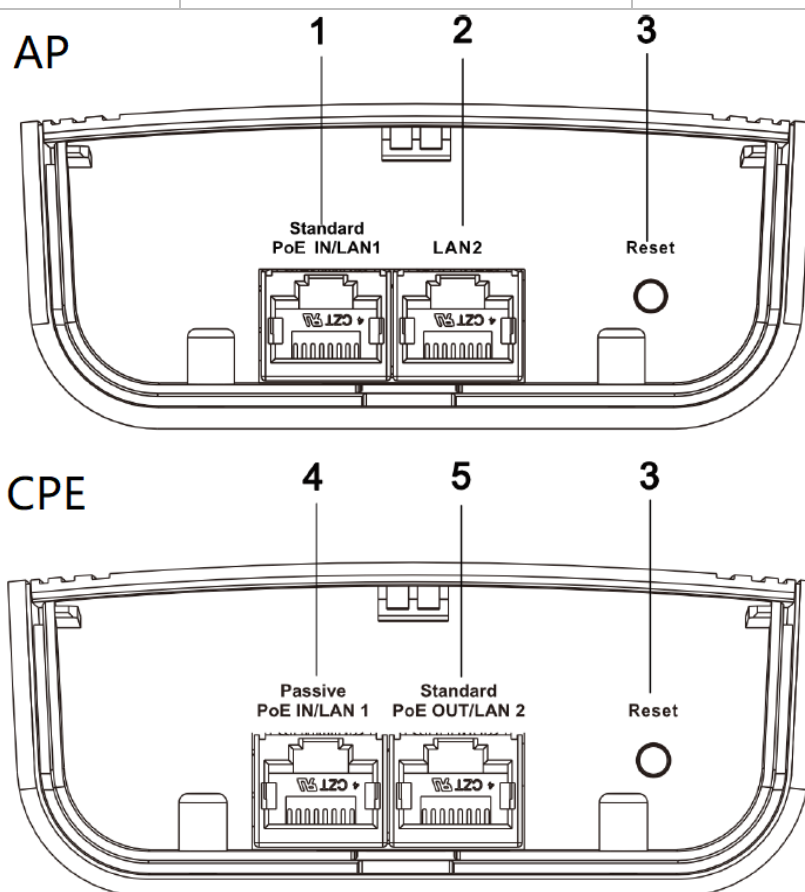


▪ Available Model

DS-3WF1000-EI-2N/P

DS-3WF1000-EI-2N/P-AP

DS-3WF1000-EI-2N/P-ST

▪ Dimension

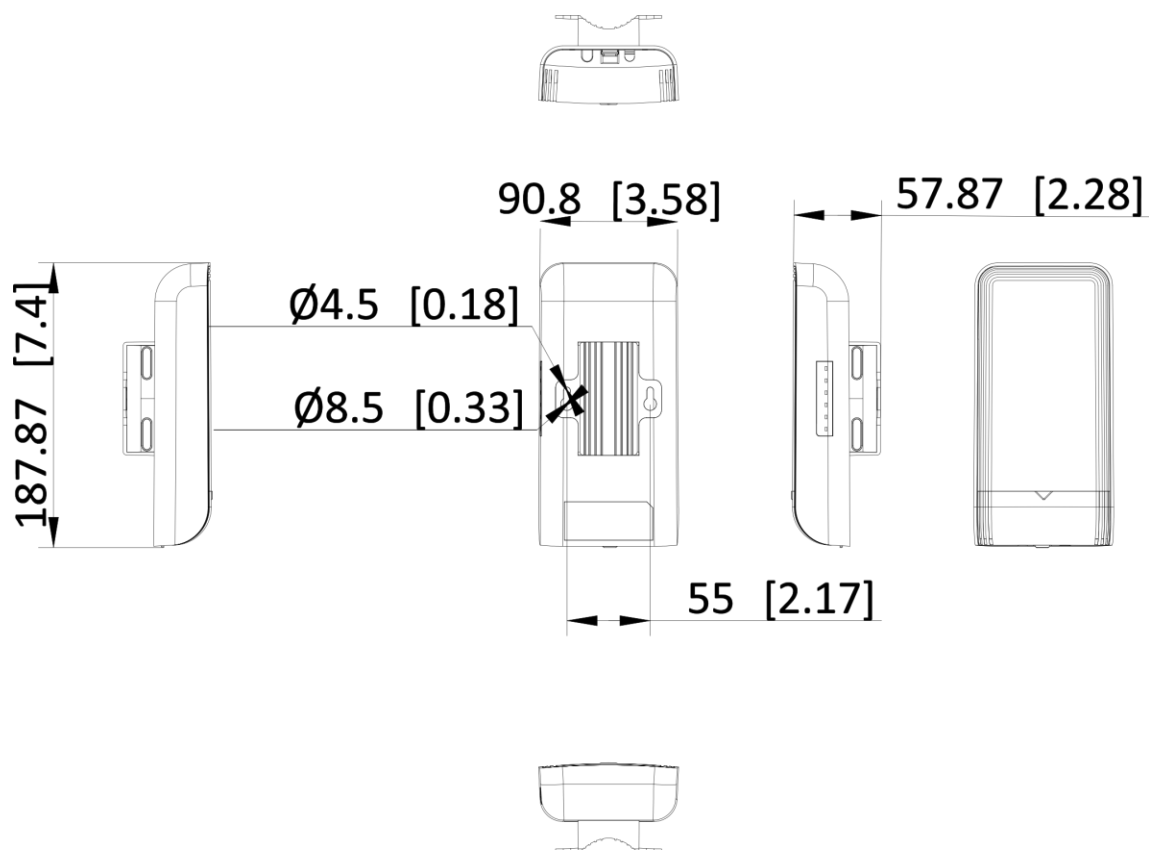

Unit: mm [inch]

See Far, Go Further



www.hikvision.com
support@hikvision.com

