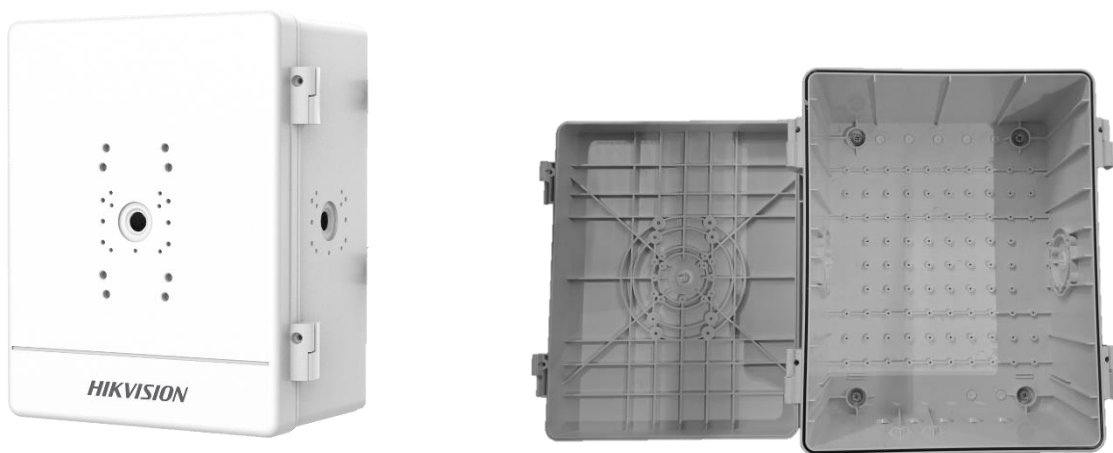# DS-SBOX-03
Hikvision Outdoor Surveillance Box

- High strength Polymer Material (Flame Proof UL94-V0)

- IP66 & IK10 Protection

- Fast Deployment & Easy Installation to be mounted in a pole or a wall

- Highly adaptable with Hikvision IPC, PTZ and IP Horn Speakers

▪ Specification

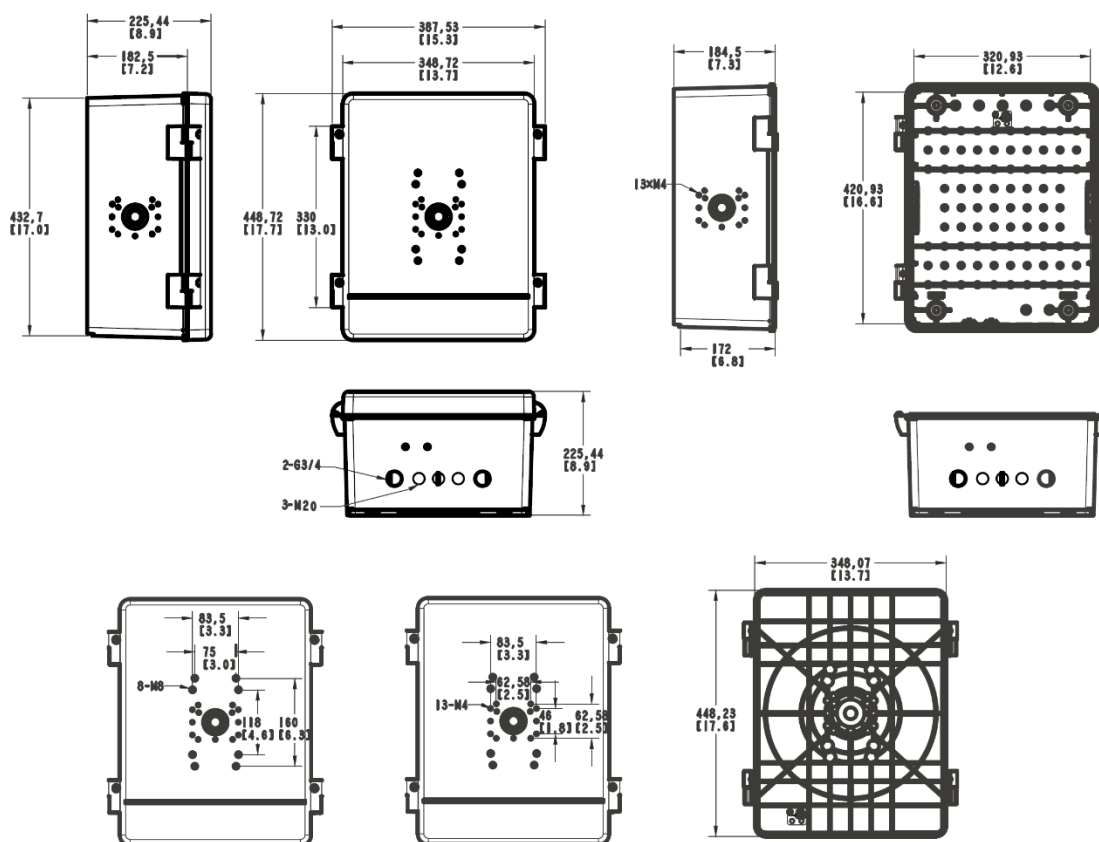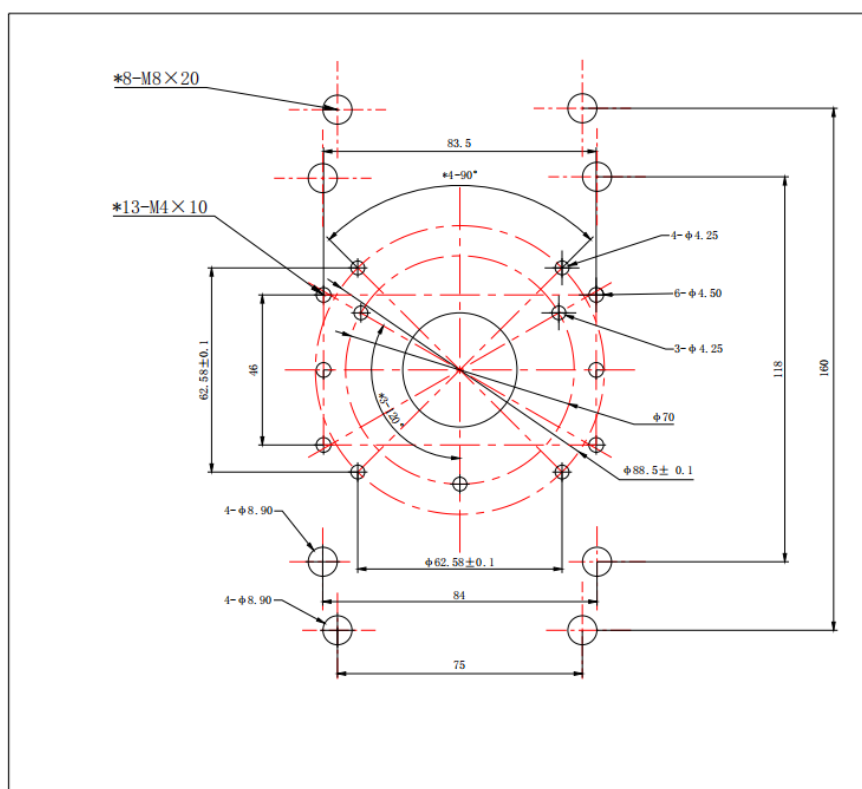| General	
Material	PC/ASA; Hikvision White(RAL 9003)
Dimension	448.72mm x 387.53mm x 225.44mm
Weight	5.2kg
Startup and Operating Conditions	-40 ℃ to 60 ℃ (-40 ℉ to 140 ℉). Humidity 95% or less (non-condensing)
General Function	Loading Capacity of Front Panel is 8kg; side panel is 5kg
Packing List	Security Box　　x1 　Installation back Plate　　x1 　Pegboard　　x1 　Shelf board　　x1 　Din Rail　　x1 　Phillips head Screw M8x20　　x4 　Phillips head Screw M8x12　　x2 　Phillips head Screw M4x10　　x12 　Self-tapping Screw M3×10　　x10 　Hex Head Phillips Screw M8×25　　x4 　Hex socket Screw M6×25　　x4 　Hexagon Socket Screwdriver　　x1 　Cylindrical pin M4×40　　x4 　Waterproof Cable connector 1(5-6.5mm)　　x3 　Waterproof Cable connector 2(6.5-8mm)　　x3 　Network cable piercing accessories　　x1 　Cable Gland G3/4　　x1 　Cable Gland M20　　x2 　Metal strapping band(80-200mm)　　x5
Approval	
Protection	IP66, IK10

▪ Available Model

DS-SBOX-03

Dimension

Unit: mm (inch)

Box Dimension:

Front Panel:

Side Panel:

Installation Plate Dimension:
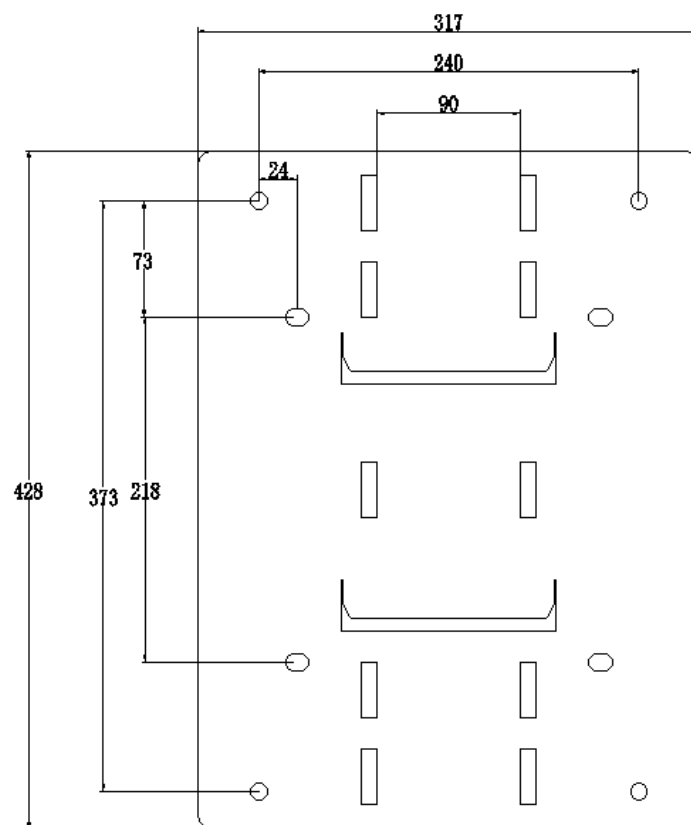
▪ Accessory

With Cameras:

DS-1618ZJ

DS-1602ZJ

DS-4603ZJ-WA

DS-1280ZJ-XS

DS-1280ZJ-DM21

DS-1260ZJ

DS-1280ZJ-DM46

DS-1280ZJ-DM45

DS-1280ZJ-DM8

DS-1280ZJ-PT6

Box Installation:

Metal strapping band ((x5 included)

(Pole Mount 80-200mm)

Installation Plate (included)

(Wall Mount, M8 bolts need to purchase)

Recommended Compatible List:

Compatible Junction	Recommended Models	Compatible Junction	Recommended Models
DS-1280ZJ-XS	**Fixed Bullet:** ● DS-2CD20x3G2 ● DS-2CD30x3G2 ● DS-2CD20x7G3 ● DS-2CD30x7G3	DS-1618ZJ (Front Panel Only)	**4 inch PTZ:** ● DS-2DE4xxxx ● DS-2SE4xxxx
DS-1280ZJ-DM8	**Fixed Turret:** ● DS-2CD23x3G2 ● DS-2CD33x3G2		
DS-1280ZJ-PT6	**Fixed Turret:** ● DS-2CD23x7G3 ● DS-2CD33x7G3	DS-4603ZJ-WA (Front Panel Only)	**7 inch PTZ:** ● DS-2DF7Axxxx
DS-1260ZJ	**VF Bullet:** ● DS-2CD26x3G2 ● DS-2CD36x3G2 **Fixed Bullet:** ● DS-2CD2Tx3G2 ● DS-2CD3Tx3G2		
DS-1280ZJ-DM45	**VF Dome:** ● DS-2CD27x7G3T ● DS-2CD37x7G3T ● iDS-2CD7146G2	No need to order additional accessories	**Bullet:** ● DS-2CD3Ax6G2T ● DS-2CD36x7G3T ● iDS-2CD7Ax6G2 ● iDS-2CD7Ax5G2 ● iDS-2CD8Ax6G2 ● DS-2XC3Tx6G0H ● DS-2XC36x6G0H **Dome:** ● DS-2CD27x7G2H(PTRZ) ● DS-2CD37x6G2H(PTRZ) ● iDS-2CD75x6G2 ● DS-2XC31x6G0H ● DS-2XC37x6G0H **Thermal Bullet:** ● DS-2TD2628 **Speaker:** ● DS-QAZ1307G1-E
DS-1280ZJ-DM46	**Fixed Dome:** ● DS-2CD21x3G2 ● DS-2CD31x3G2 ● DS-2CD21x7G3 ● DS-2CD31x7G3 **VF Dome:** ● DS-2CD27x3G2 ● DS-2CD37x3G2		
DS-1280ZJ-DM21	**Thermal Turret:** ● DS-2TD1228		

This table is just taking part of Hikvision compatible models for your reference, for other models that are not in the list please check the holes

See Far, Go Further

www.hikvision.com
support@hikvision.com

HIKVISION®