



UNIVIEW

PRODUCT GUIDE 2026



Scan to check the digital file



Scan & choose to download UNV Apps



global.uniview.com



Uniview



UniviewHQ



Uniview



UniviewTech



overseasbusiness@uniview.com




globalsupport@uniview.com

Unlimited New View

Vision:
Unlimited New View

Mission:
Uniview, consider ourselves as a citizen of the world, endeavors to build a safer world based on professionalism and reliability, move forward with fortitude, so as to achieve innovation, prosperity and continuous progress.

Value:
Innovative & Pragmatic | Collaborative & Win-win | Simple & Equal | To Continuously Improve

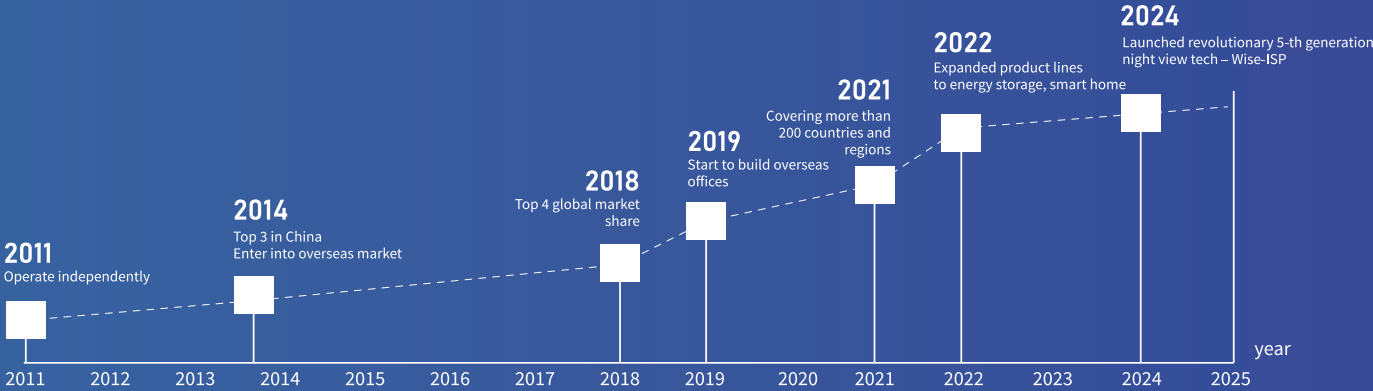

Globalized Coverage & Localized Service



Local Service

Presale consultant, after-sales service, demo test, training, RMA service, marketing support etc.

Solid Foundation For Global Expansion


Covering an area of 30,000 square meters, Uniview HQ can accommodate nearly 5,000 people working at the same time
Industry-leading experience center, R&D trial production center and Uniview Research Institute
2 R&D Institutes + 6 R&D Centers in China

10% Annual revenue invested in R&D

50% Employees in the R&D departments

Intelligent Manufacturing & Logistics

High Efficiency - Flexible & Intelligent
Reliability & Quality - Global Logistics

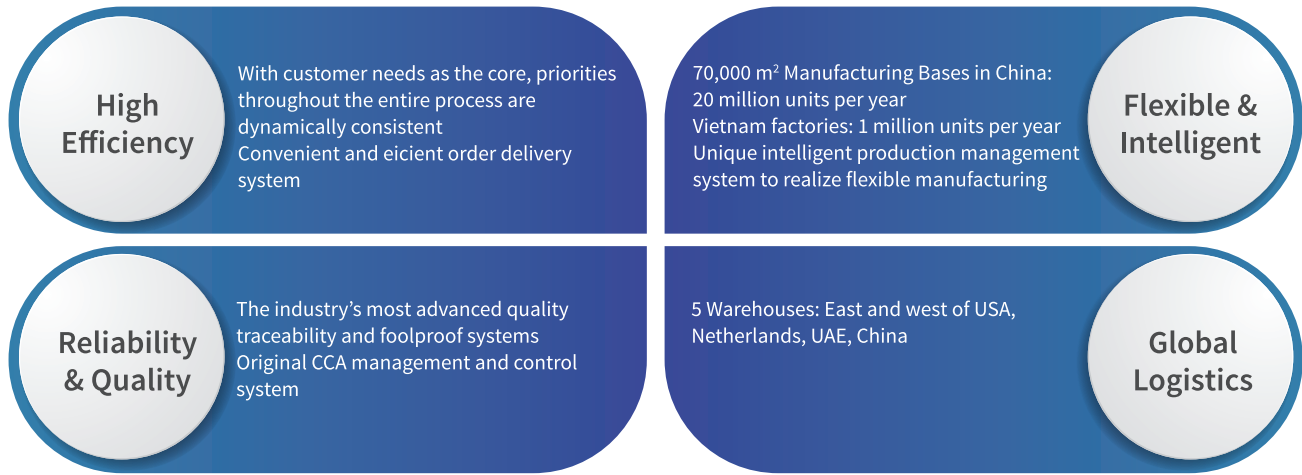

01 CCTV

- 01 CCTV Highlights
- 04 Network Cameras
- 14 Analog Cameras
- 18 PTZ Cameras
- 20 Thermal Cameras
- 22 Explosion-Proof Cameras
- 22 Intelligent Traffic
- 23 Network Video Recorders
- 36 IP Speaker
- 37 Digital Video Recorders
- 39 Edge Intelligence
- 40 Transmission
- 46 Storage
- 50 Server Products
- 51 VMS
- 54 Smart Management BOX

02 Non CCTV

- 55 Display & Control
- 57 Access Control
- 59 Video Intercoms
- 61 Speed Gates

CCTV Highlights




Uniview large model focuses on multiple aspects of the AIoT field, including vision, natural language, multimodal, and image processing, leading to comprehensive improvements in image technology across models, scenarios, and production. This resulted in unique technologies like Wise-ISP, SeekFree and AlertFree.




Wise-ISP

Uniview is the first in the industry to apply large models to image processing, achieving significant improvements in night vision through deep integration of image technology and algorithms. Based on Uniview large model, Wise-ISP night vision technology surpasses traditional limits, easily handling ultra-dark scenarios and meeting diverse needs.

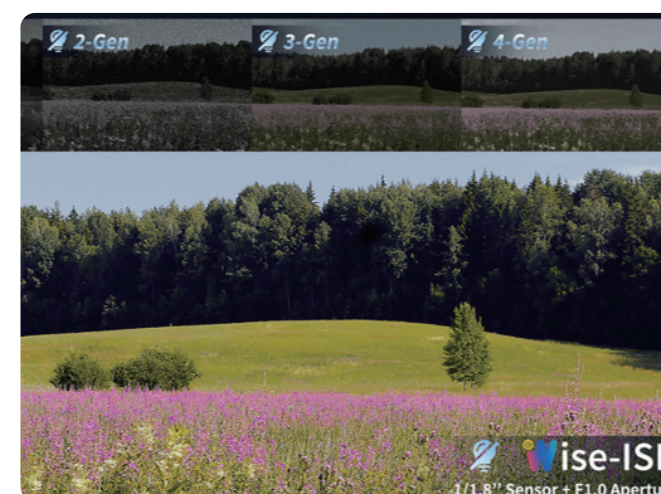

SeekFree is a new intelligent search technology on NVR. By enabling natural-language video search directly within the Uniview ecosystem, it allows operators to locate precise moments instantly—simply describe the event in everyday terms, and the relevant clips are returned across all cameras in seconds.

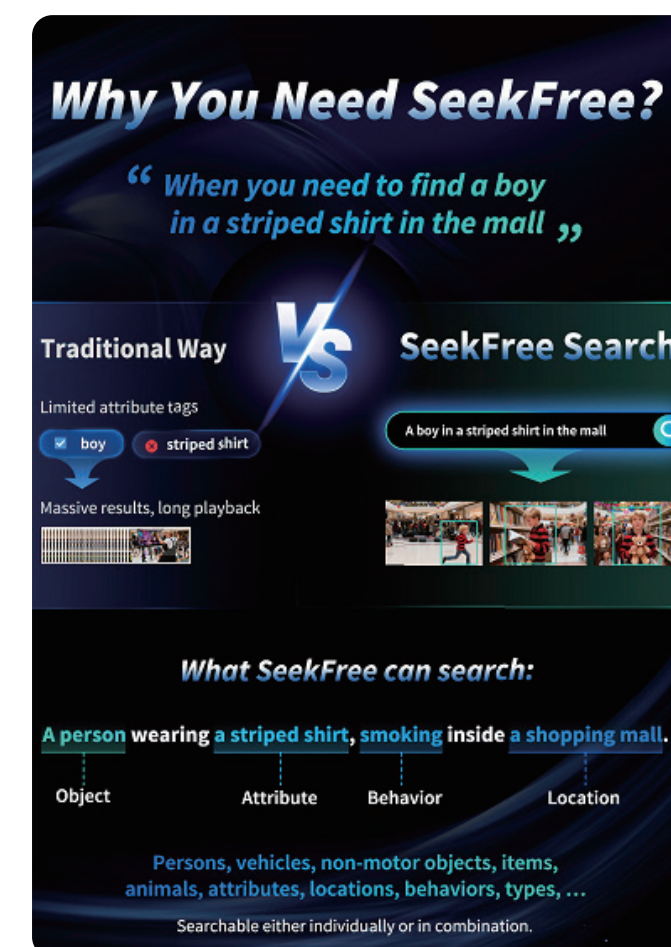

AlertFree

AlertFree is a new NVR feature powered by large models. It lets users create detection algorithms via text descriptions to generate real time alerts. This innovative function simplifies custom detection/alert deployment, eliminating the need for professional algorithm development, greatly boosting NVR security monitoring flexibility and usability.

Tri-Guard 2.0

UNV Tri-Guard series integrates Smart Intrusion Prevention, ColorHunter and Active Deterrence into one IP camera. It can not only alert when events happen, but also get color information in low-light environment. Tri-Guard 2.0 has upgraded to the red and blue light alerting, which is more noticeable than white flashing lights, especially in low visibility weather such as rain and fog. Coupled with a high-power 3W speaker, Tri-Guard 2.0 ensures a powerful alert effect.



Tri-Guard 3.0

Triguard 3.0 series features advanced hardware and intelligence for more reliable night surveillance. With Wise-ISP technology and smart dual-light, it delivers colorful and clear images in ultra low-light environments. When a person enters the deterrence area, the IP camera will trigger a red and blue light alarm. The unique structural design ensures that the red and blue lights have almost no impact on the image quality. With newly added NEMA 4X certification, alongside IP67 and IK10 ratings, it delivers reinforced protection.



Smart Dual Light

Traditional night vision IP cameras rely on IR light, producing only monochrome images that lack detail. While warm light offers color, it consumes significant power, increasing costs and causing light pollution. UNV Smart Dual Light Technology intelligently switches between light sources to deliver color images efficiently.



Ultra Motion Detection

Motion detection is a technique for detecting moving objects in an image. The upgraded UNV Ultra Motion Detection (UMD) has become more powerful by focusing on intelligent human and vehicle classification.



Smart Intrusion Prevention


Sharper detection of small, unclear, or partially blocked targets in clearer images. Longer detecting distance, less false alarms, less repeated alarms.

Auto-Tracking

Lock the target (one person in a crowd of people, one car in a fleet of cars), track the target that moves fast, relock the target instantly when it reappears.


Smart Search+

For areas without pre-set alarm rules, reviewing playback videos can be time-consuming. With the Smart Search+ feature, users can quickly view videos of people, vehicles, or non-motor vehicles entering or exiting an area by simply drawing the area of interest. This avoids the need to watch hours of footage.

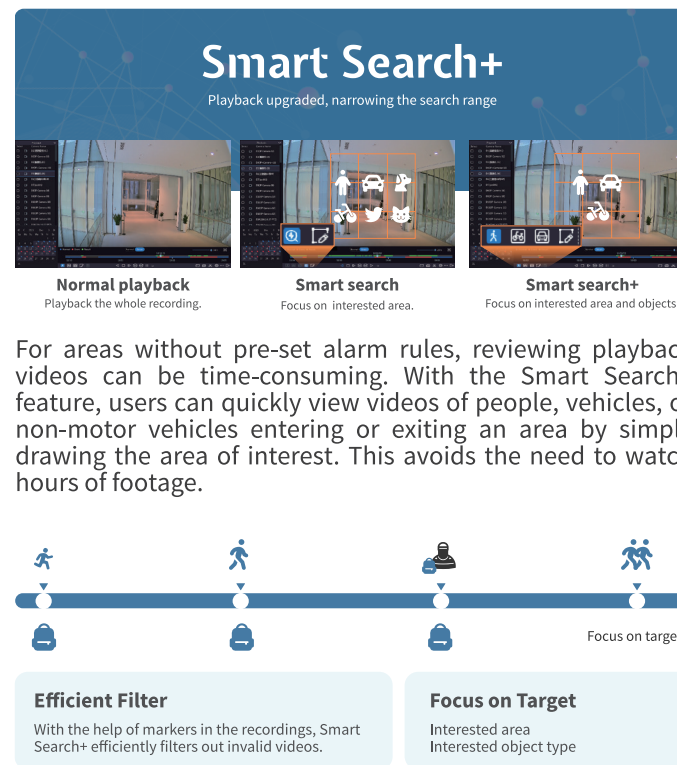

AcuSearch

AcuSearch significantly enhances user search efficiency, offering a more intuitive search experience. Users only need to select the target object in the playback or live view interface by drawing a bounding box. The algorithm extracts corresponding targets based on the selected area, then analyzes the target type and extracts feature data. This information is then compared with existing data in the database, providing users with relevant historical data.

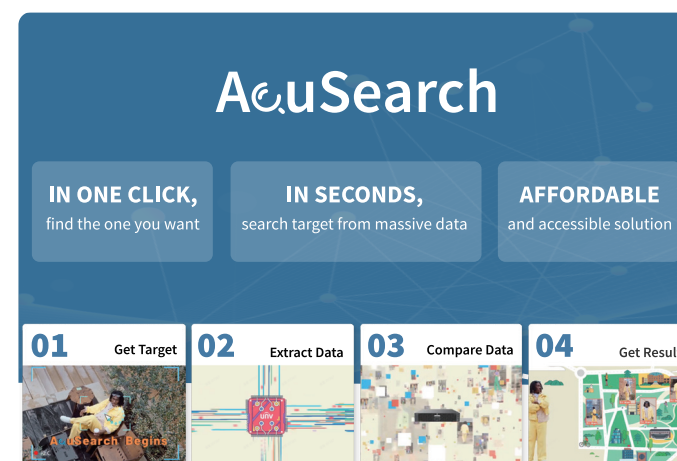


AcuTrack

A Completely New Way to Playback: Automatically generate video clips of a specified individual from all NVR channels based on timing. In the playback interface, a single click is all that's needed to frame the target and retrieve search results.



Now, through the application of various smart search technologies across the entire process, Uniview can efficiently and accurately locate targets such as people and motor vehicles, as well as related video clips, within massive amounts of video data, greatly enhancing the convenience and efficiency of the search.

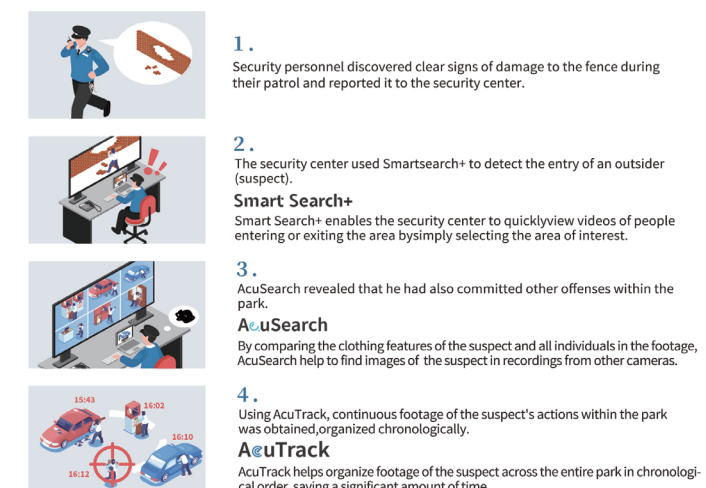

Network Cameras

Easy Series - EasyBasic



- IPC212XLB-AF28(40)-ECO**
- X = 2/4MP
 - 2/4MP, 0.01 Lux@F1.6
 - IR light up to 30m
 - Built-in Mic
 - IP67



Smart Dual Light

- IPC212XLB-AF28(40)-DL-ECO**
- X = 2/4MP
 - 2/4MP, 0.003 Lux@F1.6
 - IR light up to 30m
 - Warm Light up to 15m
 - Built-in Mic
 - IP67



- IPC361XLB-AF28-ECO**
- X = 2/4MP
 - 2/4MP, 0.01 Lux@F2.0
 - IR light up to 30m
 - Built-in Mic



Smart Dual Light

- IPC361XLB-AF28-DL-ECO**
- X = 2/4MP
 - 2/4MP, 0.005 Lux@F1.6
 - IR light up to 30m
 - Warm Light up to 15m
 - Built-in Mic
 - IP67



- IPC231XLB-AF40-ECO**
- X = 2/4MP
 - 2/4MP, 0.01 Lux@F1.6
 - IR light up to 30m
 - Built-in Mic
 - IP67



Smart Dual Light

- IPC231XLB-AF40-DL-ECO**
- X = 2/4MP
 - 2/4MP, 0.003 Lux@F1.6
 - IR light up to 30m
 - Warm Light up to 15m
 - Built-in Mic
 - IP67



Smart Dual Light

- IPC621XLFW-AF40C**
- X = 2/4MP
 - 2/4MP, 0.003 Lux@F1.6
 - IR light up to 30m
 - Warm Light up to 30m
 - Built-in Mic&Speaker
 - IP66



- IPC212XLB-AF28(40)(K)-A2**
- X = 2/4/5MP, 0.01 Lux@F2.0
 - K = 512 GB SD card slot
 - IR light up to 30m
 - Built-in Mic
 - IP67



- IPC32XLB-AF28(40)(K)-A2**
- X = 2/4/5MP, 0.01 Lux@F2.0
 - K = 512 GB SD card slot
 - IR light up to 30m
 - Built-in Mic
 - IP67, IK10



- IPC361XLB-AF28(40)(K)-A2**
- UMD (Ultra Motion Detection)
 - X = 2/4/5MP, 0.01 Lux@F2.0
 - K = 512 GB SD card slot
 - IR light up to 30m
 - Built-in Mic
 - IP67



- IPC212XLB-ADF28(40)KM-K**
- UMD (Ultra Motion Detection)
 - X=2/4MP
 - F2.0
 - IR light up to 30m
 - Built-in Mic
 - 120dB WDR
 - IP67



- IPC361XLB-ADF28(40)K-K**
- UMD (Ultra Motion Detection)
 - X=2/4MP
 - F2.0
 - IR light up to 30m
 - Built-in Mic
 - 120dB WDR
 - IP67



- IPC32XLB-ADF28(40)K-K**
- UMD (Ultra Motion Detection)
 - X=2/4MP
 - F2.0
 - IR light up to 30m
 - Built-in Mic
 - 120dB WDR
 - IP67, IK10



- IPC212XLB-ADF28(40)KM-H**
- UMD (Ultra Motion Detection)
 - X=2/4MP
 - F2.0
 - IR light up to 30m
 - Built-in Mic
 - 120dB WDR
 - IP67



- IPC361XLB-ADF28(40)K-H**
- UMD (Ultra Motion Detection)
 - X=2/4MP
 - F2.0
 - IR light up to 30m
 - Built-in Mic
 - 120dB WDR
 - IP67



- IPC32XLB-ADF28(40)K-H**
- UMD (Ultra Motion Detection)
 - X=2/4MP
 - F2.0
 - IR light up to 30m
 - Built-in Mic
 - 120dB WDR
 - IP67, IK10



Smart Dual Light

- IPC2128LB-ADF28(40)K-DL**
- UMD (Ultra Motion Detection)
 - F1.6
 - IR/White light up to 30m
 - Built-in Mic
 - 120dB WDR
 - IP67



Smart Dual Light

- IPC3618LB-ADF28K-DL**
- UMD (Ultra Motion Detection)
 - F1.6
 - IR/White light up to 30m
 - Built-in Mic
 - 120dB WDR
 - IP67



Smart Dual Light

- IPC212XLB-AF28(40)K-DL2**
- UMD (Ultra Motion Detection)
 - X=2/4MP
 - F1.6
 - IR/white light up to 30m
 - Built-in Mic
 - DWDR
 - IP67



Smart Dual Light

- IPC361XLB-AF28K-DL2**
- UMD (Ultra Motion Detection)
 - X=2/4MP
 - F1.6
 - IR/white light up to 30m
 - Built-in Mic
 - DWDR
 - IP67



- IPC232XLB-AD(E)ZK-H**
- UMD (Ultra Motion Detection)
 - X=2/4/5MP
 - 2.8-12mm
 - F1.6
 - IR light up to 50m
 - Built-in Mic
 - 120dB WDR
 - IP67



IPC353XLB-AD(E)ZK-H

- UMD (Ultra Motion Detection)
- X=2/4/5MP
- 2.8-12mm
- F1.6
- IR light up to 40m
- Built-in Mic
- 120dB WDR
- IP67, IK10



IPC363XLB-ADZK-H

- UMD (Ultra Motion Detection)
- X=2/4/5MP
- 2.8-12mm
- F1.6
- IR light up to 40m
- Built-in Mic
- 120dB WDR
- IP67

Easy Series - EasyStar



Smart Dual Light

IPC212XLE-ADF28(40)KMC-DL

- UMD (Ultra Motion Detection)
- X=2/4/8MP
- F1.6
- IR/white light up to 30m
- Two-way audio
- 120dB WDR
- IP67



Smart Dual Light

IPC361XLE-ADF28(40)K(C)-DL

- UMD (Ultra Motion Detection)
- X=2/4/6/8MP
- F1.6
- IR/white light up to 30m
- Two-way audio
- 120dB WDR
- IP67



Smart Dual Light

IPC31XLE-ADF28K-DL

- UMD (Ultra Motion Detection)
- X=2/4MP
- F1.6
- IR/white light up to 30m
- Two-way audio
- 120dB WDR
- IP67, IK10



IPC212XLE-ADF28(40)KM-H

- UMD (Ultra Motion Detection)
- X=4/5/8MP
- F1.6
- IR light up to 50m
- Built-in Mic
- 120dB WDR
- IP67



IPC361XLE-ADF28(40)K-H

- UMD (Ultra Motion Detection)
- X=4/5/8MP
- F1.6
- IR light up to 30m
- Built-in Mic
- 120dB WDR
- IP67



IPC32XLE-ADF28(40)K-H

- UMD (Ultra Motion Detection)
- X=4/5/8MP
- F1.6
- IR light up to 30m
- Built-in Mic
- 120dB WDR
- IP67

Easy Series - EasyProject



IPC312LP-ADF20KC-DL

- UMD (Ultra Motion Detection)
- Floor display
- F1.6
- IR light up to 10m
- Two-way audio
- 120dB WDR
- IP67



IPC2A1XLP-ADF40(60)KC-4G-E

- UMD (Ultra Motion Detection)
- X=2/4MP
- F1.6
- IR/White light up to 30m
- Two-way audio
- 120dB WDR
- IP67

OwlView Series



Wise-ISP

IPC231XLE-ADF28(40)KM-WP

- UMD (Ultra Motion Detection)
- X=2/4/8MP
- Wise-ISP
- F1.0
- White light up to 30m
- Built-in Mic
- 120dB WDR
- IP67



Wise-ISP

IPC352XLE-ADF28(40)K-WP

- UMD (Ultra Motion Detection)
- X=2/4/8MP
- Wise-ISP
- F1.0
- White light up to 30m
- Built-in Mic
- 120dB WDR
- IP67, IK10



Wise-ISP

IPC362XLE-ADF28(40)K-WP

- UMD (Ultra Motion Detection)
- X=2/4/8MP
- Wise-ISP
- F1.0
- White light up to 30m
- Built-in Mic
- 120dB WDR
- IP67



Wise-ISP

IPC231XLE-ADF28(40)K-WP-L

- UMD (Ultra Motion Detection)
- X=2/4MP
- Wise-ISP
- F1.0
- White light up to 30m
- Built-in Mic
- 120dB WDR
- IP67



Wise-ISP

IPC362XLE-ADF28(40)K-WP-L

- UMD (Ultra Motion Detection)
- X=2/4MP
- Wise-ISP
- F1.0
- White light up to 30m
- Built-in Mic
- 120dB WDR
- IP67



Wise-ISP

IPC245LP-ADF40(60)KC-WP

- UMD (Ultra Motion Detection)
- Wise-ISP
- F1.0
- White light up to 50m
- Two-way audio
- 120dB WDR
- IP67

Prime I Series



IPC212XSB-ADF28(40)KM-I0

- X=2/4/5/8MP
- 0.001 Lux@F1.6
- 2/4/5MP: IR 40m; 8MP: IR 30m
- Built-in mic
- UMD, SIP, People Counting
- IP67



IPC32XSB-DF28(40)K-I0

- X=2/4/5MP
- 0.001 Lux@F1.6
- IR 30m
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting
- IP67, IK10



IPC328SB-ADF28(40)K-I0

- 8MP, 0.003 Lux@F1.6
- IR 30m
- Built-in mic
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting
- IP67, IK10



IPC361XSB-ADF28(40)KM-I0

- X=2/4/5/8MP
- 0.001 Lux@F1.6
- IR 30m
- Built-in mic
- UMD, SIP, People Counting
- IP67



IPC31XSB-ADF28K-I0

- X=2/4/8MP
- 0.001 Lux@F1.6
- IR 30m
- Built-in mic
- Alarm I/O: N/A, Audio I/O: 1/1
- UMD, SIP, People Counting
- IP67, IK10



IPC314SB-ADF28K-M12-I0

- 4MP
- 0.002 Lux@F1.6
- IR 30m
- Built-in mic
- Alarm I/O: N/A, Audio I/O: 1/1, M12 D-Coding
- UMD, SIP, People Counting
- IP67, IK10



IPC232XSB-DZK-I0

- X=2/4/5MP
- 2.7mm-13.5mm, 0.001 Lux@F1.2
- IR 50m
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting
- IP67, IK10



IPC2328SB-DZK-I0

- 8MP
- 2.8mm-12mm, 0.0025 Lux@F1.6
- IR 50m
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting
- IP67, IK10



IPC323XSB-ADZK-I0

- X=2/4/5MP
- 2.7mm-13.5mm, 0.001 Lux@F1.2
- IR 40m
- Built-in mic
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting
- IP67, IK10



IPC354SB-ADNF28(40)K-I0

- 4MP, 0.003 Lux@F1.6
- IR 30m
- Built-in mic
- Cable-free
- UMD, SIP, People Counting



IPC2222SB-AHDF28(40)(60)KM-I1

- 2MP, 0.001 Lux@F1.6
- IR 80m
- Built-in mic
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP
- IP67, IK10



IPC2225SB-ADF28(40)(60)KM-I1

- 5MP, 0.003 Lux@F1.6
- IR 80m
- Built-in mic
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP
- IP67, IK10



IPC3238SB-ADZK-I0

- 8MP
- 2.8mm-12mm, 0.0025 Lux@F1.6
- IR 40m
- Built-in mic
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting
- IP67, IK10



IPC363XSB-ADZK-I0

- X=2/4/5MP
- 2.7mm-13.5mm, 0.001 Lux@F1.2
- IR 40m
- Built-in mic
- UMD, SIP, People Counting
- IP67, IK10



IPC3638SB-ADZK-I0

- 8MP
- 2.8mm-12mm, 0.0025 Lux@F1.6
- IR 40m
- Built-in mic
- UMD, SIP, People Counting
- IP67, IK10



IPC2228SB-ADF28(40)KM-I1

- 8MP, 0.002 Lux@F1.6
- IR 80m
- Built-in mic
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP
- IP67, IK10



Tri-Guard 1.0

IPC212XSB-ADF28(40)KMC-I1

- X=4/6/8MP
- 0.002 Lux@F1.4
- IR & Warm Light 40m
- Built-in mic&speaker
- UMD, SIP, People Counting
- IP67



Tri-Guard 1.0

IPC361XSB-ADF28(40)KMC-I1

- X=4/6/8MP
- 0.002 Lux@F1.4
- IR & Warm Light 30m
- Built-in mic&speaker
- UMD, SIP, People Counting
- IP67



Wise-ISP
Smart Dual Light

IPC212XSB-ADF28(40)KM-DL-I1

- X=2/4/6/8MP
- F1.6
- IR & Warm Light 40m
- Built-in mic
- UMD, SIP, People Counting
- IP67, IK10



Wise-ISP
Smart Dual Light

IPC361XSB-ADF28(40)KM-DL-I1

- X=2/4/6/8MP
- F1.6
- IR & Warm Light 40m
- Built-in mic
- UMD, SIP, People Counting
- IP67, IK10



Wise-ISP
Smart Dual Light

IPC32XSB-ADF28(40)KM-DL-I1

- X=2/4/6/8MP
- F1.6
- IR & Warm Light 40m
- Built-in mic
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting
- IP67, IK10



Tri-Guard 1.0

SB-ADF28KMC-DL-I1

- X=4/8MP
- 0.002 Lux@F1.6
- IR & Warm Light 30m
- Built-in dual-mic&speaker
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting
- IP67, IK10



IPC210XSB-ADF16KM-I0

- X=5/8MP
- 0.01 Lux@F2.0
- IR 20m
- Built-in mic
- UMD, SIP
- IP67



IPC360XSB-ADF16KM-I0

- X=5/8MP
- 0.01 Lux@F2.0
- IR 20m
- Built-in mic
- UMD, SIP
- IP67



Wise-ISP
Smart Dual Light

IPC231XSB-ADZKM-DL-I1

- X=2/4/6/8MP
- 2.7mm-13.5mm, 2/4/6MP: F1.2, 8MP: F1.4
- IR & Warm Light 60m
- Built-in mic
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting
- IP67, IK10



Wise-ISP
Smart Dual Light

IPC363XSB-ADZKM-DL-I1

- X=2/4/6/8MP
- 2.7mm-13.5mm, 2/4/6MP: F1.2, 8MP: F1.4
- IR & Warm Light 40m
- Built-in mic
- UMD, SIP, People Counting
- IP67, IK10



Wise-ISP
Smart Dual Light

IPC323XSB-ADZKM-DL-I1

- X=2/4/6/8MP
- 2.7mm-13.5mm, 2/4/6MP: F1.2, 8MP: F1.4
- IR & Warm Light 40m
- Built-in mic
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting
- IP67, IK10



IPC815SB-ADF14K-I0

- 5MP, 0.01 Lux@F2.0
- IR 10m
- Built-in mic
- Alarm I/O: 1/1, Audio I/O: 1/1
- MD, Heat MAP
- IP66, IK10



Wise-ISP

IPC816SB-ADF16KMC-I1

- 6MP
- IR 15m
- Built-in mic&speaker
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, Heat Map
- IP67, IK10



IPC2322SB-HDZK-I0

- 2MP, 0.001 Lux@F1.2
- 2.7-13.5mm
- IR 50m
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting, Object removed&Left
- IP67, IK10



IPC3232SB-AHDZK-IO

- 2MP, 0.001 Lux@F1.2
- 2.7-13.5mm
- IR 40m
- Built-in mic
- Alarm I/O: 2/1, Audio I/O: 1/1
- UMD, SIP, People Counting, Object removed&Left
- IP67, IK10



IPC2322SB-HDZK-PI-IO

- 2MP, 0.001 Lux@F1.4
- 2.8-12mm, P-Iris
- IR 50m
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting, Object removed&Left
- IP67, IK10



IPC3232SB-AHDZK-PI-IO

- 2MP, 0.001 Lux@F1.4
- 2.8-12mm, P-Iris
- IR 40m
- Built-in mic
- Alarm I/O: 2/1, Audio I/O: 1/1
- UMD, SIP, People Counting, Object removed&Left
- IP67, IK10



IPC2B1XSS-ADF28(40)K-I1

- X=2/5/8MP
- 0.001 Lux@F1.6
- IR 80m
- Built-in Mic
- Audio I/O 1/1, Alarm I/O 1/1
- ASM, Color Retrieval, SIP, UMD, People Counting
- IP67



IPC32XSS-ADF28(40)K-I1

- X=2/4/5/8MP
- 0.001 Lux@F1.6
- IR 40m
- Built-in Mic
- Audio I/O 1/1, Alarm I/O 1/1
- ASM, Color Retrieval, SIP, UMD, People Counting
- IP67, IK10



IPC361XSS-ADF28(40)K-I1

- X=2/4/5/8MP
- 0.001 Lux@F1.6
- IR 40m
- Built-in Mic
- N/A
- ASM, Color Retrieval, SIP, UMD, People Counting
- IP67



IPC3534SB-ADNZK-IO

- 2MP, 0.002 Lux@F1.2
- 2.7-13.5mm
- IR 30m
- Built-in mic
- Cable-free
- UMD, SIP, People Counting

Prime II Series



IPC2B2XSS-ADZK-I1

- X=2/4/5MP
- 2.7-13.5mm, 0.0005 Lux@F1.0/1.2
- IR 60m
- Built-in Mic
- Audio I/O 1/1, Alarm I/O 1/1
- ASM, Color Retrieval, SIP, UMD, People Counting
- IP67, IK10



IPC373XSS-ADZK-I1

- X=2/4/5MP
- 2.7-13.5mm, 0.0005 Lux@F1.0/1.2
- IR 40m
- Built-in Mic
- Audio I/O 1/1, Alarm I/O 1/1
- ASM, Color Retrieval, SIP, UMD, People Counting
- IP67, IK10



IPC363XSS-ADZK-I1

- X=2/4/5MP
- 2.7-13.5mm, 0.0005 Lux@F1.0/1.2
- IR 40m
- Built-in Mic
- Audio I/O 1/1, Alarm I/O 1/1
- ASM, Color Retrieval, SIP, UMD, People Counting
- IP67, IK10



IPC322XSS-ADF28(40)K-I1

- X=2/4MP
- 0.002 Lux@F1.0/F1.6
- IR 30m
- Built-in Dual-Mic
- Audio I/O 1/1, Alarm I/O 1/1
- SIP, UMD, People Counting
- IP67, IK10



IPC2B1XSS-ADF28(40)KMC-I1

- X=4/5/8MP
- 0.001 Lux@F1.0
- IR & Warm Light 40m
- Built-in Mic & Speaker
- Audio I/O 1/1, Alarm I/O 1/1
- ASM, Color Retrieval, SIP, UMD, People Counting
- IP67



IPC363XSS-ADF28(40)KMC-I1

- X=4/5/8MP
- 0.001 Lux@F1.0
- IR & Warm Light 30m
- Built-in Mic & Speaker
- Audio I/O 1/1, Alarm I/O 1/1
- ASM, Color Retrieval, SIP, UMD, People Counting
- IP67

Tri-Guard 2.0

Tri-Guard 2.0



IPC3515SS-ADF28K-I1-HI

- 5MP
- 0.002 Lux@F1.6
- IR 40m
- Built-in Mic
- Audio I/O 1/1, Alarm I/O 1/1, HDMI
- ASM, Color Retrieval, SIP, UMD, People Counting
- IP54, IK10



IPC363XSS-ADF28(40)K-I1

- X=4/5/8MP
- 0.002 Lux@F1.6
- IR 40m
- Built-in Mic
- Audio I/O 1/1, Alarm I/O 1/1
- ASM, Color Retrieval, SIP, UMD, People Counting
- IP67

Prime III Series



IPC2A2XSE-ADZK-I0

- X=4/8MP
- 2.8-12mm, 1/1.8" sensor, 0.0005 Lux@F1.2
- IR 80m
- Built-in Mic
- Audio I/O 1/1, Alarm I/O 2/1
- SIP, UMD, People Counting
- IP67, IK10



IPC373XSE-ADZK-I0

- X=4/8MP
- 2.8-12mm, 1/1.8" sensor, 0.0005 Lux@F1.2
- IR 40m
- Built-in Mic
- Audio I/O 1/1, Alarm I/O 2/1
- SIP, UMD, People Counting
- IP67, IK10



IPC363XSE-ADZK-I0

- X=4/8MP
- 2.8-12mm, 1/1.8" sensor, 0.0005 Lux@F1.2
- IR 40m
- Built-in Mic
- Audio I/O 1/1, Alarm I/O 2/1
- SIP, UMD, People Counting
- IP67, IK10



IPC54XSE-DK-I0

- X=2/4MP
- 1/1.8" Sensor, 0.0005 Lux@F1.2
- N/A
- N/A
- Audio I/O 1/1, Alarm I/O 2/1
- SIP, UMD, People Counting
- N/A



IPC542SE-HDK-I0

- 2MP
- 1/2.8" sensor, 0.0005 Lux@F1.2
- N/A
- N/A
- Audio I/O 1/1, Alarm I/O 2/1
- SIP, UMD, People Counting
- N/A



IPC2K2XSE-ADF40KMC-WL-I0

- X=4/8MP
- 0.0005 Lux@F1.0
- Warm Light 30m
- Built-in Dual-Mic & Speaker
- Audio I/O 1/1, Alarm I/O 1/1
- SIP, UMD, People Counting
- IP67



Smart Dual Light



Wise-ISP

IPC3K28SE-ADF28KMC-DL-I0

- 8MP
- 0.0005 Lux@F1.0
- IR & Warm Light 30m
- Built-in Dual-Mic & Speaker
- Audio I/O 1/1, Alarm I/O 1/1
- ASM, Color Retrieval, SIP, UMD, People Counting
- IP67, IK10

IPC876SE-ADF16KMC-I1

- 6MP
- 0.03 Lux@F2.0
- IR 15m
- Built-in mic&speaker
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP
- IP67, IK10

➔ OwlView Plus Series



Wise-ISP



Wise-ISP



Wise-ISP
Tri-Guard 3.0

IPC2B1XSE-ADF28(40)K-WP-I1

- X=4/8MP
- 1/1.2"/1.8" sensor, 0.0003 Lux@F1.0
- Warm Light 40m
- Built-in Mic
- Audio I/O 1/1, Alarm I/O 1/1
- Wise-ISP, ASM, Color Retrieval, SIP, UMD, People Counting
- IP67, IK10, NEMA4X

IPC363XSE-ADF28(40)K-WP-I1

- X=4/8MP
- 1/1.2"/1.8" sensor, 0.0003 Lux@F1.0
- Warm Light 30m
- Built-in Mic
- Audio I/O 1/1, Alarm I/O 1/1
- Wise-ISP, ASM, Color Retrieval, SIP, UMD, People Counting
- IP67, IK10, NEMA4X

IPC2B1XSE-ADZKMC-WP-I1

- X=4/8MP
- 2.8-12mm, 1/1.8" sensor, 0.0003 Lux@F1.2
- IR & Warm Light 40m
- Built-in Dual-Mic & Speaker
- Audio I/O 1/1, Alarm I/O 1/1
- Wise-ISP, ASM, Color Retrieval, SIP, UMD, People Counting
- IP67, IK10, NEMA4X



Wise-ISP
Tri-Guard 3.0



Wise-ISP
Tri-Guard 3.0



Wise-ISP
Tri-Guard 3.0

IPC363XSE-ADZKMC-WP-I1

- X=4/8MP
- 2.8-12mm, 1/1.8" sensor, 0.0003 Lux@F1.2
- IR & Warm Light 40m
- Built-in Dual-Mic & Speaker
- Audio I/O 1/1, Alarm I/O 1/1
- Wise-ISP, ASM, Color Retrieval, SIP, UMD, People Counting
- IP67, IK10, NEMA4X

IPC2B1XSE-ADF28(40)KMC-WP-I1

- X=4/8MP
- 1/1.8" sensor, 0.0003 Lux@F1.0
- IR & Warm Light 40m
- Built-in Dual-Mic & Speaker
- Audio I/O 1/1, Alarm I/O 1/1
- Wise-ISP, ASM, Color Retrieval, SIP, UMD, People Counting
- IP67, IK10, NEMA4X

IPC363XSE-ADF28(40)KMC-WP-I1

- X=4/8MP
- 1/1.8" sensor, 0.0003 Lux@F1.0
- IR & Warm Light 40m
- Built-in Dual-Mic & Speaker
- Audio I/O 1/1, Alarm I/O 1/1
- Wise-ISP, ASM, Color Retrieval, SIP, UMD, People Counting
- IP67, IK10, NEMA4X

➔ Prime IV Series



IPC2B2XSA-AHDZK-PI-I1

- X=2/4MP, P-iris, 2.7-13.5mm
- 0.002 Lux@F1.6
- IR 80m
- Built-in dual-mic
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting
- IP67, IK10

IPC323XSA-AHDZK-PI-I1

- X=2/4MP, P-iris, 2.7-13.5mm
- 0.002 Lux@F1.6
- IR 40m
- Built-in dual-mic
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting
- IP67, IK10

IPC264SA-AHDX4K-I1

- 4MP, 8-32 mm
- 1/1.8" sensor, 0.001 Lux@F1.6
- IR 120m, Warm Light 30m
- Built-in dual-mic
- Alarm I/O: 3/2, Audio I/O: 2/1
- UMD, SIP, People Counting, Traffic Monitoring
- IP67, IK10



Wise-ISP



Wise-ISP



Wise-ISP

IPC2B24SA-AHDZK-PI-I2A

- 4MP, P-iris, 2.7-13.5mm
- 1/1.8" CMOS, 0.0003 Lux@F1.2
- IR 80m
- Built-in dual-mic
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting, Traffic Monitoring
- IP67, IK10

IPC3234SA-AHDZK-PI-I2A

- 4MP, P-iris, 2.7-13.5mm
- 1/1.8" CMOS, 0.0003 Lux@F1.2
- IR 40m
- Built-in dual-mic
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting, Traffic Monitoring
- IP67, IK10

IPC2B28SA-ADZK-PI-I2A

- 8MP, P-iris, 2.7-13.5mm
- 1/1.8" sensor, 0.001 Lux@F2
- IR 80m
- Built-in dual-mic
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting, Traffic Monitoring
- IP67, IK10



Wise-ISP



Wise-ISP



Wise-ISP

IPC3238SA-ADZK-PI-I2A

- 8MP, P-iris, 2.7-13.5mm
- 1/1.8" sensor, 0.001 Lux@F1.2
- IR 40m
- Built-in dual-mic
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting, Traffic Monitoring
- IP67, IK10

IPC2B2XSA-AHDZK-PI-LS-I2A

- X=4/8MP, P-iris, 2.7-13.5mm
- 1/1.8" sensor, 0.001 Lux@F1.2
- IR 80m
- Built-in dual-mic, Built-in heater
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting, Traffic Monitoring
- IP67, IK10

IPC323XSA-AHDZK-PI-LS-I2A

- X=4/8MP, P-iris, 2.7-13.5mm
- 1/1.8" sensor, 0.001 Lux@F1.2
- IR 40m
- Built-in dual-mic, Built-in heater
- Alarm I/O: 1/1, Audio I/O: 1/1
- UMD, SIP, People Counting, Traffic Monitoring
- IP67, IK10

➔ Pro Series



IPC262EB-HDX10K-I0

- 2MP, 5-50mm
- 0.002 Lux@F1.6
- IR 100m
- Alarm I/O: 2/1, Audio I/O: 1/1
- SIP, People Counting, Traffic Monitoring
- IP67, IK10

IPC265EB-DX12K-I0

- 5MP, 5-60mm
- 0.001 Lux@F1.6
- IR 100m
- Alarm I/O: 2/1, Audio I/O: 1/1
- SIP, People Counting, Traffic Monitoring
- IP67, IK10

IPC254EB-DX22GK-I0

- 4MP, 6.5-143mm
- 1/1.8" sensor, 0.001 Lux@F1.5
- IR 150m
- Alarm I/O: 2/1, Audio I/O: 1/1
- SIP, People Counting, Traffic Monitoring
- IP67



Wise-ISP



IPC8645EA-ADZKM-I1

- 4x5MP, 2.7-13.5mm
- 0.002 Lux@F1.2
- IR 50m
- Built-in mic
- Alarm I/O: 3/2, Audio I/O: 1/1
- UMD, SIP, People Counting
- IP67, IK10

IPC568EB-DGK-I0

- 8MP
- 1/1.8" sensor, 0.002 Lux@F1.2
- Alarm I/O: 2/1, Audio I/O: 1/1
- SIP, People Counting, Traffic Monitoring

IPC86CEB-AF18KC-I0

- 12MP
- 1/1.7" sensor, 0.03 Lux@F2.0
- 15m
- Built-in dual-mic
- Alarm I/O: 2/1, Audio I/O: 1/1
- SIP, Heat Map
- IP67, IK10



- IPC8544EA-KM-I1**
- 4x4MP
 - 1/1.8" sensor, 0.001 Lux@F1.6
 - IR 50m
 - Alarm I/O: 2/1, Audio I/O: 1/1
 - IP67



Wise-ISP

- IPC26XEA-AHDZK-I1**
- X=4/8MP, 2.8-12mm
 - 1/1.8" sensor, 0.0003 Lux@F1.2
 - 4MP: IR 100m, 8MP: IR 60m
 - Built-in dual-mic
 - Alarm I/O: 3/2, Audio I/O: 2/1
 - SIP, People Counting, Metadata Analyse
 - IP67, IK10



Wise-ISP

- IPC323XEA-AHDZK-I1**
- X=4/8MP, 2.8-12mm
 - 1/1.8" sensor, 0.0003 Lux@F1.2
 - IR 40m
 - Built-in dual-mic
 - Alarm I/O: 3/2, Audio I/O: 2/1
 - SIP, People Counting, Metadata Analyse
 - IP67, IK10



Wise-ISP

- IPC26XEA-AHDX4K-I1**
- X=4/8MP, 8-32mm
 - 1/1.8" sensor, 0.0005 Lux@F1.2
 - 4MP: IR 100m, 8MP: IR 120m
 - Built-in dual-mic
 - Alarm I/O: 3/2, Audio I/O: 2/1
 - SIP, People Counting, Metadata Analyse
 - IP67, IK10



Wise-ISP

- IPC323XEA-AHDX4K-I1**
- X=4/8MP, 8-32mm
 - 1/1.8" sensor, 0.0005 Lux@F1.2
 - IR 40m
 - Built-in dual-mic
 - Alarm I/O: 3/2, Audio I/O: 2/1
 - SIP, People Counting, Metadata Analyse
 - IP67, IK10



IPC28184EA-ADX5K-F40-I1

- Channel 1: 4 MP, 4.0mm
- 1/1.8" sensor, 0.0005 Lux@F1.0
- Warm Light 30m
- Built-in dual-mic
- Alarm I/O: 3/2, Audio I/O: 2/1
- SIP
- IP66

- Channel 2: 8 MP, 10-50mm
- 1/1.8" sensor, 0.005 Lux@F1.6
- IR 50m
- Built-in dual-mic
- Alarm I/O: 3/2, Audio I/O: 2/1
- SIP, People Counting, Metadata Analyse
- IP66

Analog Cameras

Dolphin Series



- UAC-B112-F28(40)-X**
- 2MP, 2.8mm, 4.0mm
 - IR 20m
 - 4 in 1 (TVI/AHD/CVI/CVBS)
 - IP67



- UAC-B115-F28(40)**
- 5MP, 2.8mm, 4.0mm
 - IR 20m
 - 4 in 1 (TVI/AHD/CVI/CVBS)
 - IP67



- UAC-T112-F28(40)-X**
- 2MP, 2.8mm, 4.0mm
 - IR 20m
 - 4 in 1 (TVI/AHD/CVI/CVBS)
 - IP67



- UAC-T115-F28(40)**
- 5MP, 2.8mm, 4.0mm
 - IR 20m
 - 4 in 1 (TVI/AHD/CVI/CVBS)
 - IP67



- UAC-T132-F28(40)**
- 2MP, 2.8mm, 4.0mm
 - IR 20m
 - 4 in 1 (TVI/AHD/CVI/CVBS)



- UAC-D112-F28(40)-X**
- 2MP, 2.8mm, 4.0mm
 - IR 20m
 - 4 in 1 (TVI/AHD/CVI/CVBS)
 - IP67



- UAC-D115-F28(40)**
- 5MP, 2.8mm, 4.0mm
 - IR 20m
 - 4 in 1 (TVI/AHD/CVI/CVBS)
 - IP67



- UAC-B112(5)-AF28(40)**
- 2MP, 5MP, 2.8mm, 4.0mm
 - IR 20m
 - Built-in mic
 - 4 in 1 (TVI/AHD/CVI/CVBS)
 - IP67



- UAC-T112(5)-AF28(40)**
- 2MP, 5MP, 2.8mm, 4.0mm
 - IR 20m
 - Built-in mic
 - 4 in 1 (TVI/AHD/CVI/CVBS)
 - IP67



- UAC-B112-F28(40)-W-X**
- 2MP, 2.8mm, 4.0mm
 - IR 20m
 - 4 in 1 (TVI/AHD/CVI/CVBS)
 - IP67



- UAC-B115-F28-W**
- 5MP, 2.8mm, 4.0mm
 - IR 20m
 - 4 in 1 (TVI/AHD/CVI/CVBS)
 - IP67



- UAC-T112(5)-F28(40)-W-X**
- 2MP, 2.8mm, 4.0mm
 - IR 20m
 - 4 in 1 (TVI/AHD/CVI/CVBS)
 - IP67



- UAC-T115-F28-W**
- 5MP, 2.8mm, 4.0mm
 - IR 20m
 - 4 in 1 (TVI/AHD/CVI/CVBS)
 - IP67



- UAC-B112(5)-AF28(40)-W**
- 2MP, 5MP, 2.8mm, 4.0mm
 - WL 20m
 - Built-in mic
 - 4 in 1 (TVI/AHD/CVI/CVBS)
 - IP67



- UAC-T112(5)-AF28(40)-W**
- 2MP, 5MP, 2.8mm, 4.0mm
 - WL 20m
 - Built-in mic
 - 4 in 1 (TVI/AHD/CVI/CVBS)
 - IP67



- UAC-B142(5)-AF28(40)-WL**
- 2MP, 5MP, 2.8mm, 4.0mm, F1.0
 - WL 40m
 - Built-in mic
 - 4 in 1 (TVI/AHD/CVI/CVBS)
 - IP67



- UAC-P112-AF40-W**
- 2MP, 4.0mm
 - WL 30m
 - Built-in mic
 - 4 in 1 (TVI/AHD/CVI/CVBS)
 - IP67



- UAC-B112(5)-AF28(40)-DL**
- 2MP, 5MP, 2.8mm/4.0mm
 - IR&WL 20m
 - Built-in mic
 - 4 in 1 (TVI/AHD/CVI/CVBS)
 - IP67



- UAC-T112(5)-AF28(40)-DL**
- 2MP, 5MP, 2.8mm/4.0mm
 - IR&WL 20m
 - Built-in mic
 - 4 in 1 (TVI/AHD/CVI/CVBS)
 - IP67

Whale Series



UAC-B122(5)-AF28(40)LM

- 2MP, 5MP, 2.8mm, 4.0mm
- IR 40m
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



UAC-T122(5)-AF28(40)LM

- 2MP, 5MP, 2.8mm, 4.0mm
- IR 40m
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



UAC-D122(5)-AF28(40)M

- 2MP, 5MP, 2.8mm, 4.0mm
- IR 30m
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67, IK10



UAC-B122(5)-APF28LM

- 2MP, 5MP, 2.8mm
- IR 40m
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- PoC
- IP67



UAC-T122(5)-APF28LM

- 2MP, 5MP, 2.8mm
- IR 40m
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- PoC
- IP67



UAC-D122(5)-APF28M

- 2MP, 5MP, 2.8mm
- IR 30m
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- PoC
- IP67, IK10



UAC-B128-ADF28(40)MS

- 8MP, 2.8mm/4.0mm
- IR 40m
- 120dB WDR
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



UAC-T128-ADF28(40)MS

- 8MP, 2.8mm/4.0mm
- IR 40m
- 120dB WDR
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



UAC-D128-ADF28(40)MS

- 8MP, 2.8mm/4.0mm
- IR 30m
- 120dB WDR
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67, IK10



UAC-B312-AZLM

- 2MP, 2.8-12mm
- IR 50m
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



UAC-T312-AZM

- 2MP, 2.8-12mm
- IR 40m
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



UAC-D312-AZLM

- 2MP, 2.8-12mm
- IR 30m
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67, IK10



UAC-B315-ADZLM

- 5MP, 2.8-12mm
- IR 50m
- 120dB WDR
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



UAC-T315-ADZM

- 5MP, 2.8-12mm
- IR 40m
- 120dB WDR
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



UAC-D315-ADZLM

- 5MP, 2.8-12mm
- IR 30m
- 120dB WDR
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67, IK10



UAC-B312-ADPZMS

- 2MP, 2.8-12mm
- IR 50m
- 120dB WDR
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- PoC
- IP67



UAC-T312-ADPZMS

- 2MP, 2.8-12mm
- IR 40m
- 120dB WDR
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- PoC
- IP67



UAC-D312-ADPZMS

- 2MP, 2.8-12mm
- IR 30m
- 120dB WDR
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- PoC
- IP67, IK10



UAC-B122(5)-AF28(40)M-W

- 2MP, 5MP, 2.8mm, 4.0mm
- WL 40m
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



UAC-T122-AF28(40)M-W

- 2MP, 5MP, 2.8mm, 4.0mm
- WL 40m
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



UAC-B122-AF28(40)M-WL

- 2MP, 2.8mm, 4.0mm, F1.0
- WL 40m
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



UAC-T122-AF28(40)M-WL

- 2MP, 2.8mm, 4.0mm, F1.0
- WL 40m
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



UAC-B142(5)-AF28(40)LM-DL

- 2MP, 5MP, 2.8mm, 4.0mm
- IR&WL 40m
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



UAC-T142(5)-AF28(40)LM-DL

- 2MP, 5MP, 2.8mm, 4.0mm
- IR&WL 40m
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



UAC-B142-ACF28(40)LM-DL

- 2MP, 2.8mm/4.0mm
- IR&WL 40m
- Built-in mic&speaker
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



UAC-T142-ACF28(40)LM-DL

- 2MP, 2.8mm/4.0mm
- IR&WL 40m
- Built-in mic&speaker
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67

PTZ Cameras

Easy Series

		
IPC6412LR-X5UPW-VG · 2 MP@30fps, 1/2.7" CMOS, 5X · IR 30m · 120 dB · Pan: 360°, tilt: 0° to 90° · Motion detection · Built-in Mic&Speaker	IPC6215SR-X5PAEW-VG · 5 MP@30fps, 1/2.7" CMOS, 5X · IR 30m · 120 dB · Pan: 360°, tilt: 0° to 90° · Motion detection · Built-in Mic&Speaker	IPC643XLR-X16-VG1 · X=2,4MP · 30fps, 1/2.8" CMOS, 16X · IR 100m · 120 dB · Pan: 360°, tilt: -5° to 90° · Motion detection · IP66, IK10

		
IPC6312LR-AX4(W)-VG · W=WIFI · 2 MP@30fps, 1/2.7" CMOS, 4X · IR 50m · 120 dB · Pan: 0° to 345°, tilt: -10° to 110° · Motion detection · Built-in Mic&Speaker · IP66	IPC6322LFW-AX5C-VG(1) · 2 MP@30fps, 1/2.7" CMOS, 5X · IR 50m, Warm Light 15m · 120 dB · Pan: 0° to 345°, tilt: -10° to 100° · Motion detection, Auto Tracking, SIP · Built-in Mic&Speaker · IP66	IPC6315LFW-AX5C-VG(1) · 5 MP@30fps, 1/2.7" CMOS, 5X · IR 50m, Warm Light 15m · 120 dB · Pan: 0° to 345°, tilt: -10° to 100° · Motion detection · Built-in Mic&Speaker · IP66

OwlView PTZ

		
IPC6412LR-X16-VG · 2 MP@30fps, 1/2.8" CMOS, 16X · IR 100m · 120 dB · Pan: 360°, tilt: -15° to 90° · Motion detection · IP66	IPC9312LFW-AF28-2X4 · 2 MP@30fps, 1/2.8" CMOS, 4X · Panorama: 10 m · Detail: 50 m · 120 dB · Pan: 0° to 345°, tilt: -10° to 100° · Motion detection · Built-in Mic&Speaker · IP66	IPC6314LWH-AX5C-VG2 · 4MP@30fps, 1/1.8"COMS, 5X · Warm light 40m · 120dB · Pan: 0° to 345°, Tilt: -10° to 100° · Motion detection, SIP · Built-in Mic&Speaker · IP66

Prime Series

		
IPC642XSR-X25-VF-B · X=2,4MP · 30fps, 1/2.8" CMOS, 25X · IR 100m · 120 dB · Pan: 360°, tilt: -15° to 90° · Face Capture, Auto Tracking, SIP · IP67, IK10	IPC6424SR-X25-VF · 4 MP@30fps, 1/2.8" CMOS, 25X · IR 100m · 120 dB · Pan: 360°, tilt: -15° to 90° · Face Capture, Auto Tracking, SIP · IP67, IK10	IPC6612SR-X25/33-VG · 2 MP@30fps, 1/2.8" CMOS, 25X/33X · IR 150m · 120 dB · Pan: 360°, tilt: -15° to 90° · Motion detection · IP66, IK10

		
IPC662XSR-X25/33-VF · X=2,4MP · 30fps, 1/2.8" CMOS, 25X/33X · IR 150m · 120 dB · Pan: 360°, tilt: -15° to 90° · Motion detection · IP66	IPC6634S-X33-VF · 4 MP@30fps, 1/2.8" CMOS, 33X · 120 dB · Pan: 360°, tilt: 1° to 90° · Face Capture, Auto Tracking, SIP · IP67, IK10	IPC6624SR-X33-VD2A · 4 MP@60fps, 1/2.7" CMOS, 33X · IR 200m · 120 dB, EIS · Pan: 360°, tilt: -15° to 90° · Face Capture, Auto Tracking, SIP · IP66

	
IPC94144SX-X25-F40C · X=R, FW · 4 MP@30fps, 1/1.8" CMOS, 25X · Panorama: 30 m · Detail: 100 m · 120 dB · Pan: 360°, tilt: -15° to 90° · Motion detection, Linkage Function, SIP · IP66	IPC6624SR-X25/X33-VH2 · 4 MP@60fps, 1/2.9" CMOS, 25X/33X · IR 200m · 120 dB · Pan: 360°, tilt: -15° to 90° · Face Capture, Auto Tracking, SIP · IP67, IK10

Pro Series

		
IPC6858ER-X40-VF · 8 MP@30fps, 1/1.8" CMOS, 40X · IR 250m · 120 dB, EIS · Pan: 360°, tilt: -15° to 90° · Face Capture, Auto Tracking, SIP · IP66	IPC682XEL-X42-W-VH1 · X=4,8MP · 30fps, 1/1.8" CMOS, 42X · IR (VF laser) 300m · 120 dB, EIS · Pan: 360°, tilt: -15° to 90° · Face Capture, Auto Tracking, SIP · IP67	IPC68188EFW-X25-F40G-VH · 8 MP@30fps, 1/1.2" CMOS, 40X · IR 250m · 120 dB · Pan: 360°, tilt: -15° to 90° · Face Capture, Auto Tracking, SIP · IP66, IK10



Wise-ISP



Wise-ISP

IPC98246EFW-X42-W-VH1

- Panorama :6 MP , Detail :4 MP
- 30fps, 1/1.8" CMOS, 42X
- IR 350m
- 120 dB
- Pan: 360°, tilt: -15° to 90°
- Face Capture, Auto Tracking, SIP
- IP67, IK10

IPC6824ER-X42-W-VH2

- 4 MP@30fps, 1/1.8" CMOS, 42X
- IR 500m
- 120 dB, EIS
- Pan: 360°, tilt: -15° to 90°
- Face Capture, Auto Tracking, SIP
- IP67, IK10

Positioning System



Wise-ISP



Wise-ISP



Wise-ISP

IPC7628EL-L-X41-VH1

- 8 MP@30fps, 1/1.8" CMOS, 41X
- IR (VF laser) 1000m
- 120 dB
- Pan: 360°, tilt: 45° to -90°
- Face Capture, Auto Tracking, SIP
- IP67

IPC7624ER-X41-VH1

- 4 MP@30fps, 1/1.8" CMOS, 41X
- IR 400m
- 120 dB
- Pan: 360°, tilt: 45° to -90°
- Face Capture, Auto Tracking, SIP
- IP67

IPC7622ER-X45-VH1

- 2 MP@30fps, 1/1.8" CMOS, 45X
- IR 400m
- 120 dB
- Pan: 360°, tilt: 45° to -90°
- Face Capture, Auto Tracking, SIP
- IP67

Thermal Cameras



Wise-ISP
Tri-Guard



Wise-ISP
Tri-Guard



Wise-ISP
Tri-Guard

TIC2A32SA-F7-4F6AC-I1

- Thermal:256*192@12 μ m, 7mm, NETD< 50 mk
- Optical:4MP,6mm,1/2.8" CMOS
- Supports audio and light alarm
- $\pm 8^{\circ}\text{C}$ ($\pm 14.4^{\circ}\text{F}$) or $\pm 8\%$
- IP67

TIC2A32SA-F3-4F4AC-I1

- Thermal:256*192@12 μ m, 3.2mm, NETD< 50 mk
- Optical:4MP,4mm,1/2.8" CMOS
- Supports audio and light alarm
- $\pm 8^{\circ}\text{C}$ ($\pm 14.4^{\circ}\text{F}$) or $\pm 8\%$
- IP67

TIC2A32SA-F10-4F8AC-I1

- Thermal:256*192@12 μ m, 10mm, NETD< 50 mk
- Optical:4MP,8mm,1/2.8" CMOS
- Supports audio and light alarm
- $\pm 8^{\circ}\text{C}$ ($\pm 14.4^{\circ}\text{F}$) or $\pm 8\%$
- IP67



Wise-ISP
Tri-Guard



Wise-ISP
Tri-Guard



Wise-ISP
Tri-Guard

TIC3612SA-F2-4F3AC-I1

- Thermal:256*192@12 μ m, 2.1mm, NETD< 50 mk
- Optical:4MP,2.6mm,1/2.8" CMOS
- Supports audio and light alarm
- $\pm 8^{\circ}\text{C}$ ($\pm 14.4^{\circ}\text{F}$) or $\pm 8\%$
- IP67

TIC3612SA-F7-4F6AC-I1

- Thermal:256*192@12 μ m, 7mm, NETD< 50 mk
- Optical:4MP,6mm,1/2.8" CMOS
- Supports audio and light alarm
- $\pm 8^{\circ}\text{C}$ ($\pm 14.4^{\circ}\text{F}$) or $\pm 8\%$
- IP67

TIC3612SA-F3-4F4AC-I1

- Thermal:256*192@12 μ m, 3.2mm, NETD< 50 mk
- Optical:4MP,4mm,1/2.8" CMOS
- Supports audio and light alarm
- $\pm 8^{\circ}\text{C}$ ($\pm 14.4^{\circ}\text{F}$) or $\pm 8\%$
- IP67



Wise-ISP



Wise-ISP
Tri-Guard



Wise-ISP
Tri-Guard

TIC7626EL-GAF75-4X56-VH1

- Thermal:640*512@12 μ m, 75mm, NETD $\leq$ 40 mk
- Optical:4MP,6-336mm,56X
- 1/1.8" CMOS
- Dual spectrum intelligent intrusion protection
- IP66

TIC2624S-F10-4F6AC-I3

- Thermal:400*300@12 μ m, 10mm, NETD< 30 mk
- Optical:4MP,6mm,1/2.7" CMOS
- Support audio and light alarm
- $\pm 8^{\circ}\text{C}$ ($\pm 14.4^{\circ}\text{F}$) or $\pm 8\%$
- IP67, NEMA 4X

TIC2624S-F25-4F12AC-I3

- Thermal:400*300@12 μ m, 25mm, NETD< 30 mk
- Optical:4MP,12mm,1/2.7" CMOS
- Support audio and light alarm
- $\pm 8^{\circ}\text{C}$ ($\pm 14.4^{\circ}\text{F}$) or $\pm 8\%$
- IP67, NEMA 4X



Wise-ISP
Tri-Guard



Wise-ISP
Tri-Guard



Wise-ISP
Tri-Guard

TIC2624S-F35-4F12AC-I3

- Thermal:400*300@12 μ m, 35mm, NETD< 30 mk
- Optical:4MP,12mm,1/2.7" CMOS
- Support audio and light alarm
- $\pm 8^{\circ}\text{C}$ ($\pm 14.4^{\circ}\text{F}$) or $\pm 8\%$
- IP67, NEMA 4X

TIC2626S-F10-4F4AC-I3

- Thermal:640*512@12 μ m, 10mm, NETD< 30 mk
- Optical:4MP,4mm,1/2.7" CMOS
- Support audio and light alarm
- $\pm 8^{\circ}\text{C}$ ($\pm 14.4^{\circ}\text{F}$) or $\pm 8\%$
- IP67, NEMA 4X

TIC2626S-F25-4F8AC-I3

- Thermal:640*512@12 μ m, 25mm, NETD< 30 mk
- Optical:4MP,8mm,1/2.7" CMOS
- Support audio and light alarm
- $\pm 8^{\circ}\text{C}$ ($\pm 14.4^{\circ}\text{F}$) or $\pm 8\%$
- IP67, NEMA 4X



Wise-ISP
Tri-Guard

TIC2626S-F35-4F12AC-I3

- Thermal:640*512@12 μ m, 35mm, NETD< 30 mk
- Optical:4MP,12mm,1/2.7" CMOS
- Support audio and light alarm
- $\pm 8^{\circ}\text{C}$ ($\pm 14.4^{\circ}\text{F}$) or $\pm 8\%$
- IP67, NEMA 4X

Explosion-Proof Cameras

EXC2614S-X33-W-VD2 · 4MP, 6.5-214.5 mm, 33X · 1/1.8" CMOS · IR 200m · ATEX, IECEx, NEMA 4X · 316L · IP68、IK10	EXC7514S-X33-W-VD2 · 4MP, 6.5-214.5 mm, 33X · 1/1.8" CMOS · IR 200m · ATEX, IECEx, NEMA 4X · 316L · IP68、IK10	EXC6524S-X33-VD2 · 4MP, 4.5-148.5 mm, 33X · 1/2.7" CMOS · ATEX, IECEx, NEMA 4X · 316L · IP68、IK10

Intelligent Traffic

PKC2641-Z28(80)(100)(-IR)-P · Wise-ISP, 4MP, 0.0005 Lux (F1.4) · 2.8 - 12mm/8 - 32mm/10 - 50mm · IR(Warm) light up to 50m · Micro SD · Audio I/O, Alarm I/O, RS485, Wiegand · IP67, IK10 · ANPR, Vehicle Attribute, Block&Allow List	PKC5601-C4Z-LED44-WH(IR) · Wise-ISP, 4MP, 0.0005 Lux (F1.4) · 2.8 - 12mm · IR(Warm) light up to 50m · Built-in Mic, Speaker, Micro SD, LED Display · Audio I/O, Alarm I/O, RS485, Wiegand · IP54 · ANPR, Vehicle Attribute, Block&Allow List	KIT-PKC2841-Z28-WH(IR)-PKP-LZ · Wise-ISP, 4MP, 0.0005 Lux (F1.4) · 2.8 - 12mm · IR(Warm) light up to 50m · Micro SD · Audio I/O, Alarm I/O, RS485, Wiegand · IP67 · ANPR, Vehicle Attribute, Block&Allow List

Parking Guidance

PKC1150@4-Z28-C-P · 5MP, 0.002lux (F1.35-F2.68) · 2.8 - 12mm · 7-color LED indicator · Built-in Mic & Speaker · Alarm I/O, RS485 · IP66 · ANPR, Parking Detection(4 parking spaces)	PKC17C0@6-C-LP · 12MP, 0.03lux (F2.0) · 1.8mm, FOV 180° · 7-color LED indicator · Built-in Mic & Speaker, Micro SD · Alarm I/O, Audio I/O, RS485 · IP67 · ANPR, Parking Detection(6 parking spaces)	PKC17C0@12-C · 12MP, 0.03lux (F2.0) · 1.8mm, FOV 180° · 7-color LED indicator · Built-in Mic & Speaker, Micro SD · Alarm I/O, Audio I/O, RS485 · IP67 · Parking Detection(12 parking spaces)

Road ANPR Camera

IPS-HC264@HDX4-WH(IR)-I1 · Wise-ISP, 4MP, 0.0005 lux (F1.6), 140 db WDR · 8 - 32mm · IR(Warm) light up to 40m · Built-in Mic & Speaker, Micro SD · Audio I/O, Alarm I/O, RS485 · IP67, IK10 · ANPR, Traffic Monitoring	IPS-HC268@HDX4-WH(IR)-I1 · Wise-ISP, 8MP, 0.003 lux (F1.6), 140 db WDR · 8 - 32mm · IR(Warm) light up to 40m · Built-in Mic & Speaker, Micro SD · Audio I/O, Alarm I/O, RS485 · IP67, IK10 · ANPR, Traffic Monitoring

Network Video Recorders

301-S3 Series

NVR301-04S3-(P4) · 4-ch IP Video Input, Support POE · Up to 64 Mbps incoming bandwidth · Up to 1 x 4K@30, 4 x 5MP@25, 4 x 4MP@25, 4 x 3MP@25 decoding capability · 1 SATA Interface, Up to 10 TB for each HDD	NVR301-08S3-(P8) · 8-ch IP Video Input · Up to 64 Mbps incoming bandwidth · Up to 1 x 4K@30, 4 x 5MP@25, 4 x 4MP@25, 4 x 3MP@25, 6 x 1080P@30 · 1 SATA Interface, Up to 10 TB for each HDD	NVR301-16S3 · 16-ch IP Video Input · Up to 64 Mbps incoming bandwidth · Up to 1 x 4K@30, 4 x 5MP@25, 4 x 4MP@25, 4 x 3MP@25, 6 x 1080P@30 · 1 SATA Interface, Up to 10 TB for each HDD



NVR301-04LS3-P4

- 4-ch IP Video Input, Support POE
- Up to 64 Mbps incoming bandwidth
- Up to 1x4K@30, 4 x 5MP@25, 4 x 4MP@25, 4 x 3MP@25
- 1 SATA Interface, Up to 10 TB for each HDD



NVR301-08LS3-P8

- 8-ch IP Video Input, Support POE
- Up to 64 Mbps incoming bandwidth
- Up to 1 x 4K@30, 4x5MP@25, 4 x 4MP@25, 4 x 3MP@25, 6 x 1080P@30
- 1 SATA Interface, Up to 10 TB for each HDD



NVR301-16LS3-P8

- 16-ch IP Video Input, Support POE
- Up to 64 Mbps incoming bandwidth
- Up to 1x4K@30, 4 x 5MP@25, 4 x 4MP@25, 4 x 3MP@25, 6 x 1080P@30
- 1 SATA Interface, Up to 10 TB for each HDD

301-B-IQ Series



NVR301-04B-(P4)-IQ

- 4-ch IP Video Input, Support POE
- Up to 80 Mbps incoming bandwidth
- Up to 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30
- 1 SATA Interface, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 2-ch Smart Intrusion Prevention
- Up to 4-ch Ultra Motion Detection



NVR301-08B-(P8)-IQ

- 8-ch IP Video Input, Support POE
- Up to 80 Mbps incoming bandwidth
- Up to 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30
- 1 SATA Interface, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 2-ch Smart Intrusion Prevention
- Up to 4-ch Ultra Motion Detection



NVR301-16B-IQ

- 16-ch IP Video Input
- Up to 80 Mbps incoming bandwidth
- Up to 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 10 x 1080P@30
- 1 SATA Interface, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 2-ch Smart Intrusion Prevention
- Up to 4-ch Ultra Motion Detection



NVR301-04B-LP4-IQ

- 4-ch IP Video Input, Support POE
- Up to 80 Mbps incoming bandwidth
- Up to 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30
- 1 SATA Interface, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 2-ch Smart Intrusion Prevention
- Up to 4-ch Ultra Motion Detection



NVR301-08B-LP8-IQ

- 8-ch IP Video Input, Support POE
- Up to 80 Mbps incoming bandwidth
- Up to 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30
- 1 SATA Interface, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 2-ch Smart Intrusion Prevention
- Up to 4-ch Ultra Motion Detection



NVR301-16B-LP8-IQ

- 16-ch IP Video Input, Support POE
- Up to 80 Mbps incoming bandwidth
- Up to 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 10 x 1080P@30
- 1 SATA Interface, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 2-ch Smart Intrusion Prevention
- Up to 4-ch Ultra Motion Detection

302-B-IQ Series



NVR302-09B-IQ

- 9-ch IP Video Input
- Up to 160 Mbps incoming bandwidth
- Up to 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 9 x 1080P@30
- 2 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 2-ch Smart Intrusion Prevention
- Up to 4-ch Ultra Motion Detection



NVR302-16B-(P16)-IQ

- 16-ch IP Video Input, Support POE
- Up to 160 Mbps incoming bandwidth
- Up to 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 10 x 1080P@30
- 2 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 2-ch Smart Intrusion Prevention
- Up to 4-ch Ultra Motion Detection



NVR302-32B-IQ

- 32-ch IP Video Input
- Up to 160 Mbps incoming bandwidth
- Up to 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 10 x 1080P@30, 20 x 720P@30, 32 x D1
- 2 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 2-ch Smart Intrusion Prevention
- Up to 4-ch Ultra Motion Detection



NVR302-08B-P8-IQ

- 8-ch IP Video Input, Support POE
- Up to 160 Mbps incoming bandwidth
- Up to 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30
- 2 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 2-ch Smart Intrusion Prevention
- Up to 4-ch Ultra Motion Detection

304-B-IQ Series



NVR304-16B-(P16)-IQ

- 16-ch IP Video Input, Support POE
- Up to 160 Mbps incoming bandwidth
- Up to 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 10 x 1080P@30
- 4 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 2-ch Smart Intrusion Prevention
- Up to 4-ch Ultra Motion Detection



NVR304-32B-(P16)-IQ

- 32-ch IP Video Input, Support POE
- Up to 160 Mbps incoming bandwidth
- Up to 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 10 x 1080P@30
- 4 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 2-ch Smart Intrusion Prevention
- Up to 4-ch Ultra Motion Detection

301-E-IQ Series



NVR301-08E-(P8)-IQ

- 8-ch IP Video Input, Support POE
- Up to 80 Mbps incoming bandwidth
- Up to 1 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30
- 1 SATA Interface, Up to 24 TB for each HDD
- SeekFree: Full Channel with UNV UMD or SIP IPC
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 2-ch Smart Intrusion Prevention
- Up to 4-ch Ultra Motion Detection



➡ 301-S4-LW Series



- NVR301-08S4-LW**
- 8-ch IP Video Input
 - Up to 64 Mbps incoming bandwidth
 - Up to 1 x 8MP@30, 2 x 5MP@25, 3x4MP@25, 4 x 3MP@25, 6 x 1080P@30
 - 1 SATA Interface, Up to 10 TB for each HDD



- KIT/NVR301-08S4-LW/8*IPC2122LB-AF28WK-WF**
- 8-ch IP Video Input
 - Up to 64 Mbps incoming bandwidth
 - Up to 1 x 8MP@30, 2 x 5MP@25, 3x4MP@25, 4 x 3MP@25, 6 x 1080P@30
 - 1 SATA Interface, Up to 10 TB for each HDD



- KIT/NVR301-08S4-LW/4*IPC2122LB-AF28WK-WF**
- 8-ch IP Video Input
 - Up to 64 Mbps incoming bandwidth
 - Up to 1x8MP@30, 2x5MP@25, 3x4MP@25, 4 x 3MP@25, 6 x 1080P@30
 - 1 SATA Interface, Up to 10 TB for each HDD

➡ 501-B Series



- NVR501-04B-(P4)**
- 4-ch IP Video Input, Support POE
 - Up to 80 Mbps incoming bandwidth
 - Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30
 - 1 SATA Interface, Up to 24 TB for each HDD



- NVR501-08B-(P8)**
- 8-ch IP Video Input, Support POE
 - Up to 80 Mbps incoming bandwidth
 - Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 6 x 5MP@30, 8 x 4MP@30
 - 1 SATA Interface, Up to 24 TB for each HDD



- NVR501-16B**
- 16-ch IP Video Input
 - Up to 80 Mbps incoming bandwidth
 - Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 6 x 5MP@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30
 - 1 SATA Interface, Up to 24 TB for each HDD



- NVR501-04B-LP4**
- 4-ch IP Video Input, Support POE
 - Up to 80 Mbps incoming bandwidth
 - Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30
 - 1 SATA Interface, Up to 24 TB for each HDD



- NVR501-08B-LP8**
- 8-ch IP Video Input, Support POE
 - Up to 80 Mbps incoming bandwidth
 - Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 6 x 5MP@30, 8 x 4MP@30
 - 1 SATA Interface, Up to 24 TB for each HDD



- NVR501-04B-P4-A**
- 4-ch IP Video Input, Support POE
 - Up to 80 Mbps incoming bandwidth
 - Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30
 - 1 SATA Interface, Up to 24 TB for each HDD

➡ 501-B-IQ Series



- NVR501-04B-(P4)-IQ**
- 4-ch IP Video Input, Support POE
 - Up to 80 Mbps incoming bandwidth
 - Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30
 - 1 SATA Interface, Up to 24 TB for each HDD
 - AcuSearch: Full Channel with UNV UMD or SIP IPC
 - AcuTrack: Full Channel with UNV UMD or SIP IPC
 - Up to 4-ch Smart Intrusion Prevention
 - Up to 8-ch Ultra Motion Detection



- NVR501-08B-(P8)-IQ**
- 16-ch IP Video Input
 - Up to 80 Mbps incoming bandwidth
 - Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30
 - 1 SATA Interface, Up to 24 TB for each HDD
 - AcuSearch: Full Channel with UNV UMD or SIP IPC
 - AcuTrack: Full Channel with UNV UMD or SIP IPC
 - Up to 4-ch Smart Intrusion Prevention
 - Up to 8-ch Ultra Motion Detection



- NVR501-16B-IQ**
- 16-ch IP Video Input
 - Up to 80 Mbps incoming bandwidth
 - Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30
 - 1 SATA Interface, Up to 24 TB for each HDD
 - AcuSearch: Full Channel with UNV UMD or SIP IPC
 - AcuTrack: Full Channel with UNV UMD or SIP IPC
 - Up to 4-ch Smart Intrusion Prevention
 - Up to 8-ch Ultra Motion Detection



- NVR501-08B-LP8-IQ**
- 8-ch IP Video Input, Support POE
 - Up to 80 Mbps incoming bandwidth
 - Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30
 - 1 SATA Interface, Up to 24 TB for each HDD
 - AcuSearch: Full Channel with UNV UMD or SIP IPC
 - AcuTrack: Full Channel with UNV UMD or SIP IPC
 - Up to 4-ch Smart Intrusion Prevention
 - Up to 8-ch Ultra Motion Detection

➡ 502-B Series



- NVR502-09B**
- 9-ch IP Video Input
 - Up to 320 Mbps incoming bandwidth
 - Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 6 x 5MP@30, 8 x 4MP@30, 9 x 3MP@30
 - 2 SATA Interfaces, Up to 24 TB for each HDD



- NVR502-16B-(P16)**
- 16-ch IP Video Input, Support POE
 - Up to 320 Mbps incoming bandwidth
 - Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 6 x 5MP@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30
 - 2 SATA Interfaces, Up to 24 TB for each HDD



- NVR502-32B-(P16)**
- 32-ch IP Video Input, Support POE
 - Up to 320 Mbps incoming bandwidth
 - Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 6 x 5MP@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30
 - 2 SATA Interfaces, Up to 24 TB for each HDD



- NVR502-08B-P8**
- 8-ch IP Video Input, Support POE
 - Up to 320 Mbps incoming bandwidth
 - Up to Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 6 x 5MP@30, 8 x 4MP@30
 - 2 SATA Interfaces, Up to 24 TB for each HDD

➤ 502-B-IQ Series



NVR502-09B-IQ

- 9-ch IP Video Input
- Up to 320Mbps, incoming bandwidth
- Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 3MP@30, 9 x 1080P@30
- 2 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 4-ch Smart Intrusion Prevention
- Up to 8-ch Ultra Motion Detection



NVR502-16B-(P16)-IQ

- 16-ch IP Video Input, Support POE
- Up to 320Mbps, incoming bandwidth
- Up to Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30
- 2 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 4-ch Smart Intrusion Prevention
- Up to 8-ch Ultra Motion Detection



NVR502-32B-(P16)-IQ

- 32-ch IP Video Input, Support POE
- Up to 320Mbps, incoming bandwidth
- Up to 2x16MP@30,2x12MP@30,4x4K@30,8x4MP@30,10x 3MP@30, 16 x 1080P@30
- 2 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 4-ch Smart Intrusion Prevention
- Up to 8-ch Ultra Motion Detection



NVR502-08B-P8-IQ

- 8-ch IP Video Input, Support POE
- Up to 320Mbps, incoming bandwidth
- Up to 2x16MP@30,2x12MP@30,4 x 4K@30,8 x 4MP@30, 8 x 3MP@30, 8 x 1080P@30
- 2 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 4-ch Smart Intrusion Prevention
- Up to 8-ch Ultra Motion Detection

➤ 504-B Series



NVR504-16B-(P16)

- 16-ch IP Video Input, Support POE
- Up to 320 Mbps incoming bandwidth
- Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 6 x 5MP@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30
- 4 SATA Interfaces, Up to 24 TB for each HDD



NVR504-32B-(P16)

- 32-ch IP Video Input, Support POE
- Up to 320 Mbps incoming bandwidth
- Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 6 x 5MP@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30
- 4 SATA Interfaces, Up to 24 TB for each HDD

➤ 504-B-IQ Series



NVR504-16B-(P16)-IQ

- 16-ch IP Video Input, Support POE
- Up to 320Mbps, incoming bandwidth
- Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30
- 4 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 4-ch Smart Intrusion Prevention
- Up to 8-ch Ultra Motion Detection



NVR504-32B-(P16)-IQ

- 32-ch IP Video Input, Support POE
- Up to 320Mbps, incoming bandwidth
- Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30
- 4 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 4-ch Smart Intrusion Prevention
- Up to 8-ch Ultra Motion Detection

➤ 508-B Series



NVR508-16B

- 16-ch IP Video Input
- Up to 320 Mbps incoming bandwidth
- Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 6 x 5MP@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30
- 8 SATA Interfaces, Up to 24 TB for each HDD



NVR508-32B

- 32-ch IP Video Input
- Up to 320 Mbps incoming bandwidth
- UUp to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 6 x 5MP@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30
- 8 SATA Interfaces, Up to 24 TB for each HDD



NVR508-64B

- 64-ch IP Video Input
- Up to 320 Mbps incoming bandwidth
- Up to 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 6 x 5MP@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30
- 8 SATA Interfaces, Up to 24 TB for each HDD

➤ 304-X Series



NVR304-16X

- 16-ch IP Video Input
- Up to 384 Mbps incoming bandwidth
- Up to 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080P@30
- 4 SATA Interfaces, Up to 24 TB for each HDD



NVR304-32X

- 32-ch IP Video Input
- Up to 384 Mbps incoming bandwidth
- Up to 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080P@30
- 4 SATA Interfaces, Up to 24 TB for each HDD

➤ 308-X Series



NVR308-16X

- 16-ch IP Video Input
- Up to 384 Mbps incoming bandwidth
- Up to 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080P@30
- 8 SATA Interfaces, Up to 24 TB for each HDD



NVR308-32X

- 32-ch IP Video Input
- Up to 384 Mbps incoming bandwidth
- Up to 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080P@30
- 8 SATA Interfaces, Up to 24 TB for each HDD



NVR308-64X

- 64-ch IP Video Input
- Up to 384 Mbps incoming bandwidth
- Up to 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080P@30
- 8 SATA Interfaces, Up to 24 TB for each HDD

➤ 502-E-IX Series



NVR502-32E-IX-G

- 32-ch IP Video Input
- Up to 192 Mbps incoming bandwidth
- Up to 4 x 16MP@30, 8 x 4K@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30
- 2 SATA Interfaces, Up to 24 TB for each HDD
- SeekFree: Full Channel with UNV UMD or SIP IPC or 16-ch with 3rd party IPC
- AcuSearch: Full Channel with UNV UMD or SIP IPC or 16-ch by NVR
- Up to 16-ch Smart Intrusion Prevention
- Up to 16-ch Video Metadata
- Up to 16-ch Behavior Analysis

➤ 502-E-IM Series



NVR502-16E-IM-G

- 16-ch IP Video Input
- Up to 192 Mbps incoming bandwidth
- Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30, 16 x 3MP@30, 16 x 1080P@30
- 2 SATA Interfaces, Up to 24 TB for each HDD
- SeekFree: Full Channel with UNV UMD or SIP IPC or 16-ch with 3rd party IPC
- Up to 16-ch Smart Intrusion Prevention
- Up to 16-ch Video Metadata

NVR502-32E-IM-G

- 32-ch IP Video Input
- Up to 192 Mbps incoming bandwidth
- Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30, 21 x 3MP@30, 32 x 1080P@30
- 2 SATA Interfaces, Up to 24 TB for each HDD
- SeekFree: Full Channel with UNV UMD or SIP IPC or 16-ch with 3rd party IPC
- Up to 16-ch Smart Intrusion Prevention
- Up to 16-ch Video Metadata

➤ 504-E-IQ Series



NVR504-16E-(P16)-IQ

- 16-ch IP Video Input, Support POE
- Up to 384Mbps, incoming bandwidth
- Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30
- 4 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 8-ch Smart Intrusion Prevention
- Up to 16-ch Ultra Motion Detection

NVR504-32E-(P24)-IQ

- 32-ch IP Video Input, Support POE
- Up to 384Mbps, incoming bandwidth
- Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30
- 4 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 8-ch Smart Intrusion Prevention
- Up to 16-ch Ultra Motion Detection



NVR504-64E-(P24)-IQ

- 64-ch IP Video Input, Support POE
- Up to 384Mbps, incoming bandwidth
- Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30
- 4 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 16-ch Ultra Motion Detection

➤ 508-E Series



NVR508-32E-R

- 32-ch IP Video Input
- Up to 384 Mbps incoming bandwidth
- Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 16 x 4MP@30, 32 x 1080P@30
- 8 SATA Interfaces, Up to 24 TB for each HDD

NVR508-64E-R

- 64-ch IP Video Input
- Up to 384 Mbps incoming bandwidth
- Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 16 x 4MP@30, 32 x 1080P@30
- 8 SATA Interfaces, Up to 24 TB for each HDD

NVR508-128E-R

- 128-ch IP Video Input
- Up to 384 Mbps incoming bandwidth
- Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30
- 8 SATA Interfaces, Up to 24 TB for each HDD

➤ 508-E-IQ Series



NVR508-32E-IQ

- 32-ch IP Video Input
- Up to 384Mbps, incoming bandwidth
- Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30
- 8 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 8-ch Smart Intrusion Prevention
- Up to 16-ch Ultra Motion Detection

NVR508-64E-IQ

- 64-ch IP Video Input
- Up to 512 Mbps incoming bandwidth
- Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30
- 8 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 8-ch Smart Intrusion Prevention
- Up to 16-ch Ultra Motion Detection



NVR508-32E-R-IQ

- 32-ch IP Video Input
- Up to 384Mbps, incoming bandwidth
- Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30
- 8 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 8-ch Smart Intrusion Prevention
- Up to 16-ch Ultra Motion Detection

NVR508-64E-R-IQ

- 64-ch IP Video Input
- Up to 512 Mbps, incoming bandwidth
- Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30
- 8 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 8-ch Smart Intrusion Prevention
- Up to 16-ch Ultra Motion Detection

➤ 509-E-IQ Series



NVR509-16E-IQ

- 16-ch IP Video Input
- Up to 384 Mbps incoming bandwidth
- Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30
- 9 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 16-ch Smart Intrusion Prevention
- Up to 16-ch Ultra Motion Detection

NVR509-32E-IQ

- 32-ch IP Video Input
- Up to 384 Mbps incoming bandwidth
- Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30
- 9 SATA Interfaces, Up to 24 TB for each HDD
- AcuSearch: Full Channel with UNV UMD or SIP IPC
- AcuTrack: Full Channel with UNV UMD or SIP IPC
- Up to 16-ch Smart Intrusion Prevention
- Up to 16-ch Ultra Motion Detection



- NVR509-64E-IQ**
- 64-ch IP Video Input
 - Up to 384 Mbps incoming bandwidth
 - Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30
 - 9 SATA Interfaces, Up to 24 TB for each HDD
 - AcuSearch: Full Channel with UNV UMD or SIP IPC
 - AcuTrack: Full Channel with UNV UMD or SIP IPC
 - Up to 16-ch Smart Intrusion Prevention
 - Up to 16-ch Ultra Motion Detection

509-E-IM Series



- NVR509-32E-IM**
- 32-ch IP Video Input
 - Up to 384 Mbps incoming bandwidth
 - Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30
 - 9 SATA Interfaces, Up to 24 TB for each HDD
 - Up to 24-ch Smart Intrusion Prevention
 - Up to 24-ch Ultra Motion Detection
 - Up to 6-ch Video Metadata



- NVR509-64E-IM**
- 64-ch IP Video Input
 - Up to 384 Mbps incoming bandwidth
 - Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30
 - 9 SATA Interfaces, Up to 24 TB for each HDD
 - Up to 32-ch Smart Intrusion Prevention
 - Up to 32-ch Ultra Motion Detection
 - Up to 6-ch Video Metadata



- NVR509-16E-IM**
- 16-ch IP Video Input
 - Up to 384 Mbps incoming bandwidth
 - Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30
 - 9 SATA Interfaces, Up to 24 TB for each HDD
 - Up to 16-ch Smart Intrusion Prevention
 - Up to 16-ch Ultra Motion Detection
 - Up to 6-ch Video Metadata

516-E Series



- NVR516-64E-R**
- 64-ch IP Video Input
 - Up to 640 Mbps incoming bandwidth
 - Up to 3 x 32MP@30, 6 x 16MP@30, 8 x 12MP@30, 12 x 4K@30, 19 x 5MP@30, 24 x 4MP@30, 32 x 3MP@30, 48 x 1080P@30
 - 16 SATA Interfaces, Up to 24 TB for each HDD



- NVR516-128E-R**
- 128-ch IP Video Input
 - Up to 640 Mbps incoming bandwidth
 - Up to 3 x 32MP@30, 6 x 16MP@30, 8 x 12MP@30, 12 x 4K@30, 19 x 5MP@30, 24 x 4MP@30, 32 x 3MP@30, 48 x 1080P@30
 - 16 SATA Interfaces, Up to 24 TB for each HDD

520-E-IM Series



- NVR520-64E-R-IM**
- 64-ch IP Video Input
 - Up to 768 Mbps incoming bandwidth
 - Up to 3 x 32MP@30, 6 x 16MP@30, 8 x 12MP@30, 12 x 4K@30, 16 x 6MP@30, 19 x 5MP@30, 24 x 4MP@30, 32 x 3MP@30
 - 20 SATA Interfaces, Up to 24 TB for each HDD
 - Up to 24-ch Smart Intrusion Prevention
 - Up to 32-ch Ultra Motion Detection
 - Up to 6-ch Video Metadata



- NVR520-128E-R-IM**
- 128-ch IP Video Input
 - Up to 768 Mbps incoming bandwidth
 - Up to 3 x 32MP@30, 6 x 16MP@30, 8 x 12MP@30, 12 x 4K@30, 16 x 6MP@30, 19 x 5MP@30, 24 x 4MP@30, 32 x 3MP@30, 48 x 1080P@30
 - 20 SATA Interfaces, Up to 24 TB for each HDD
 - Up to 24-ch Smart Intrusion Prevention
 - Up to 32-ch Ultra Motion Detection
 - Up to 6-ch Video Metadata

524-E Series



- NVR524-128E**
- 128-ch IP Video Input
 - Up to 640 Mbps incoming bandwidth
 - Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 12 x 5MP@30, 20 x 3MP@30, 32 x 1080P@30
 - 24 SATA Interfaces, Up to 24 TB for each HDD



- NVR524-256E**
- 256-ch IP Video Input
 - Up to 640 Mbps incoming bandwidth
 - Up to 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 12 x 5MP@30, 20 x 3MP@30, 32 x 1080P@30
 - 24 SATA Interfaces, Up to 24 TB for each HDD

524-E-IM Series



- NVR524-128E-IM**
- 128-ch IP Video Input
 - Up to 768 Mbps incoming bandwidth
 - Up to 3 x 32MP@30, 6 x 16MP@30, 8 x 12MP@30, 12 x 4K@30, 16 x 6MP@30, 19 x 5MP@30, 24 x 4MP@30, 32 x 3MP@30, 48 x 1080P@30,
 - 24 SATA Interfaces, Up to 24 TB for each HDD
 - Up to 24-ch Smart Intrusion Prevention
 - Up to 32-ch Ultra Motion Detection
 - Up to 6-ch Video Metadata



- NVR524-256E-IM**
- 256-ch IP Video Input
 - Up to 768 Mbps incoming bandwidth
 - Up to 3 x 32MP@30, 6 x 16MP@30, 8 x 12MP@30, 12 x 4K@30, 16 x 6MP@30, 19 x 5MP@30, 24 x 4MP@30, 32 x 3MP@30, 48 x 1080P@30
 - 24 SATA Interfaces, Up to 24 TB for each HDD
 - Up to 24-ch Smart Intrusion Prevention
 - Up to 32-ch Ultra Motion Detection
 - Up to 6-ch Video Metadata

532-E-IM Series



- NVR532-128E-R-IM**
- 128-ch IP Video Input
 - Up to 768 Mbps incoming bandwidth
 - Up to 3 x 32MP@30, 6 x 16MP@30, 8 x 12MP@30, 12 x 4K@30, 16 x 6MP@30, 19 x 5MP@30, 24 x 4MP@30, 32 x 3MP@30, 48 x 1080P@30
 - 32 SATA Interfaces, Up to 24 TB for each HDD
 - Up to 24-ch Smart Intrusion Prevention
 - Up to 32-ch Ultra Motion Detection
 - Up to 6-ch Video Metadata



- NVR532-256E-R-IM**
- 256-ch IP Video Input
 - Up to 768 Mbps incoming bandwidth
 - Up to 3 x 32MP@30, 6 x 16MP@30, 8 x 12MP@30, 12 x 4K@30, 16 x 6MP@30, 19 x 5MP@30, 24 x 4MP@30, 32 x 3MP@30, 48 x 1080P@30
 - 32 SATA Interfaces, Up to 24 TB for each HDD
 - Up to 24-ch Smart Intrusion Prevention
 - Up to 32-ch Ultra Motion Detection
 - Up to 6-ch Video Metadata

➡ 804-IX Series



NVR804-32-IX-G

- 32-ch IP Video Input
- Up to 384 Mbps incoming bandwidth
- Up to 6 x 4K@30, 8 x 6MP@30, 10 x 5MP@30, 12 x 4MP@30, 16 x 3MP@30, 25 x 1080P@30
- 4 SATA Interfaces, Up to 24 TB for each HDD
- SeekFree: Full Channel with UNV UMD or SIP IPC or 16-ch with 3rd party IPC
- Up to 16-ch Smart Intrusion Prevention
- Up to 16-ch Ultra Motion Detection
- Up to 16-ch Video Metadata
- Up to 16-ch Behavior Analysis

NVR804-16-IX-G

- 16-ch IP Video Input
- Up to 384 Mbps incoming bandwidth
- Up to 6 x 4K@30, 8 x 6MP@30, 10 x 5MP@30, 12 x 4MP@30, 16 x 3MP@30, 16 x 1080P@30
- 4 SATA Interfaces, Up to 24 TB for each HDD
- SeekFree: Full Channel with UNV UMD or SIP IPC or 16-ch with 3rd party IPC
- Up to 16-ch Smart Intrusion Prevention
- Up to 16-ch Ultra Motion Detection
- Up to 16-ch Video Metadata
- Up to 16-ch Behavior Analysis



NVR804-64-IX-G

- 64-ch IP Video Input
- Up to 384 Mbps incoming bandwidth
- Up to 6 x 4K@30, 8 x 6MP@30, 10 x 5MP@30, 12 x 4MP@30, 16 x 3MP@30, 25 x 1080P@30
- 4 SATA Interfaces, Up to 24 TB for each HDD
- SeekFree: Full Channel with UNV UMD or SIP IPC or 16-ch with 3rd party IPC
- Up to 16-ch Smart Intrusion Prevention
- Up to 16-ch Ultra Motion Detection
- Up to 16-ch Video Metadata
- Up to 16-ch Behavior Analysis

➡ 808-IX Series



NVR808-32-IX-G

- 32-ch IP Video Input
- Up to 512 Mbps incoming bandwidth
- Up to 6 x 4K@30, 8 x 6MP@30, 10 x 5MP@30, 12 x 4MP@30, 16 x 3MP@30, 25 x 1080P@30, 32 x 720P@30
- 8 SATA Interfaces, Up to 24 TB for each HDD
- SeekFree: Full Channel with UNV UMD or SIP IPC or 16-ch with 3rd party IPC
- Up to 16-ch Smart Intrusion Prevention
- Up to 16-ch Ultra Motion Detection
- Up to 16-ch Video Metadata
- Up to 16-ch Behavior Analysis

NVR808-64-IX-G

- 64-ch IP Video Input
- Up to 512 Mbps incoming bandwidth
- Up to 6 x 4K@30, 8 x 6MP@30, 10 x 5MP@30, 12 x 4MP@30, 16 x 3MP@30, 25 x 1080P@30
- 8 SATA Interfaces, Up to 24 TB for each HDD
- SeekFree: Full Channel with UNV UMD or SIP IPC or 16-ch with 3rd party IPC
- Up to 16-ch Smart Intrusion Prevention
- Up to 16-ch Ultra Motion Detection
- Up to 16-ch Video Metadata
- Up to 16-ch Behavior Analysis

➡ 816 Series



NVR816-64

- 64-ch IP Video Input
- Up to 512 Mbps incoming bandwidth
- Up to 3 x 12MP@25, 4 x 4K@30, 16 x 1080P@30
- 16 SATA Interfaces, Up to 24 TB for each HDD

NVR816-128

- 128-ch IP Video Input
- Up to 512 Mbps incoming bandwidth
- Up to 3 x 12MP@25, 4 x 4K@30, 16 x 1080P@30
- 16 SATA Interfaces, Up to 24 TB for each HDD

➡ 816-IM2 Series



NVR816-64-R-IM2-4G

- 64-ch IP Video Input
- Up to 768 Mbps incoming bandwidth
- Up to 3 x 12MP@30, 5 x 4K@30, 8 x 5MP@25, 10 x 4MP@30, 13 x 3MP@30, 20 x 1080P@30
- 16 SATA Interfaces, Up to 24 TB for each HDD
- Up to 48-ch Smart Intrusion Prevention
- Up to 48-ch Video Metadata

NVR816-128-R-IM2-8G

- 128-ch IP Video Input
- Up to 768 Mbps incoming bandwidth
- Up to 3 x 12MP@30, 5 x 4K@30, 8 x 5MP@25, 10 x 4MP@30, 13 x 3MP@30, 20 x 1080P@30
- 16 SATA Interfaces, Up to 24 TB for each HDD
- Up to 96-ch Smart Intrusion Prevention
- Up to 96-ch Video Metadata

➡ 824 Series



NVR824-128R

- 128-ch IP Video Input
- Up to 768 Mbps incoming bandwidth
- Up to 3 x 12MP@30, 5 x 4K@30, 20 x 1080P@30, 24 x 1080P@25
- 24 SATA Interfaces, Up to 24 TB for each HDD

NVR824-256R

- 256-ch IP Video Input
- Up to 768 Mbps incoming bandwidth
- Up to 3 x 12MP@30, 5 x 4K@30, 20 x 1080P@30, 24 x 1080P@25
- 24 SATA Interfaces, Up to 24 TB for each HDD

➡ 824-IM2 Series



NVR824-128-R-IM2-8G

- 128-ch IP Video Input
- Up to 768 Mbps incoming bandwidth
- Up to 3 x 12MP@30, 5 x 4K@30, 8 x 5MP@30, 15 x 4MP@20, 20 x 3MP@20, 20 x 1080P@30, 24 x 1080P@25
- 24 SATA Interfaces, Up to 24 TB for each HDD
- Up to 96-ch Smart Intrusion Prevention
- Up to 96-ch Video Metadata

NVR824-256-R-IM2-16G

- 256-ch IP Video Input
- Up to 768 Mbps incoming bandwidth
- Up to 3 x 12MP@30, 5 x 4K@30, 8 x 5MP@30, 15 x 4MP@20, 20 x 3MP@20, 20 x 1080P@30, 24 x 1080P@25
- 24 SATA Interfaces, Up to 24 TB for each HDD
- Up to 192-ch Smart Intrusion Prevention
- Up to 192-ch Video Metadata

➡ 824-IX2 Series



NVR824-128-R-IX2-8G

- 128-ch IP Video Input
- Up to 768 Mbps incoming bandwidth
- Up to 3 x 12MP@30, 5 x 4K@30, 8 x 5MP@30, 15 x 4MP@20, 20 x 3MP@20, 20 x 1080P@30, 24 x 1080P@25, 45 x 720P@30, 54 x 720P@25, 96 x D1
- 24 SATA Interfaces, Up to 24 TB for each HDD
- Up to 96-ch Smart Intrusion Prevention
- Up to 96-ch Behavior Analysis



NVR824-256-R-IX2-16G

- 256-ch IP Video Input
- Up to 768 Mbps incoming bandwidth
- Up to 3 x 12MP@30, 5 x 4K@30, 8 x 5MP@30, 15 x 4MP@20, 20 x 3MP@20, 20 x 1080P@30, 24 x 1080P@25, 45 x 720P@30, 54 x 720P@25, 96 x D1
- 24 SATA Interfaces, Up to 24 TB for each HDD
- Up to 192-ch Smart Intrusion Prevention
- Up to 192-ch Behavior Analysis

IP Speaker



IPS302030-S

- Rated Power : 30 W
- Max. Acoustic Pressure : 130 dBSPL
- Support Regular Broadcast, Live Broadcast, Alarm Broadcast
- Support Two-Way Audio



IPS302015-S

- Rated Power : 15 W
- Max. Acoustic Pressure : 122 dBSPL
- Support Regular Broadcast, Live Broadcast, Alarm Broadcast
- Support Two-Way Audio



IPS301015-S

- Rated Power: 15 W
- Max. Acoustic Pressure: 122 dBSPL
- Support Regular Broadcast, Live Broadcast, Alarm Broadcast
- Support Two-Way Audio

Digital Video Recorders

➡ F Series



XVR301-04F

- 4-ch analog video input
- 2-ch IP Video Input.Up to 6-ch IP video input
- Up to 1080P Lite@25, 720P@30 encoding capability
- 1 SATA interface
- Up to 4-ch Ultra Motion Detection



XVR301-08F

- 8-ch analog video input
- 2-ch IP Video Input.Up to 10-ch IP video input
- Up to 1080P Lite @15, 720P @15 encoding capability
- 1 SATA interface
- Up to 8-ch Ultra Motion Detection



XVR301-16F

- 16-ch analog video input
- 2-ch IP Video Input.Up to 18-ch IP video input
- Up to 1080P Lite@12, 720P@15 encoding capability
- 1 SATA interface
- Up to 8-ch Ultra Motion Detection

➡ G Series



XVR301-04G3

- 4-ch analog video input
- 2-ch IP Video Input.Up to 6-ch IP video input
- Up to 5MP Lite@12, 4MP Lite@15, 1080P@15 encoding capability
- 1 SATA interface
- Up to 4-ch Ultra Motion Detection



XVR301-08G3

- 8-ch analog video input
- 4-ch IP Video Input.Up to 8-ch IP video input
- Up to 5MP Lite@6, 1080P Lite @12fps encoding capability
- 1 SATA interface
- Up to 4-ch Ultra Motion Detection



XVR301-16G3

- 16-ch analog video input
- 8-ch IP Video Input.Up to 16-ch IP video input
- Up to 5MP Lite@6, 1080P Lite@12 encoding capability
- 1 SATA interface
- Up to 8-ch Ultra Motion Detection

➡ Q Series



XVR301-04Q4

- 4-ch analog video input
- 2-ch IP Video Input. Up to 6-ch IP video input
- Up to 8MP Lite@8, 3K Lite@12, 5MP Lite@12, 4MP Lite@15, 1080P@15 encoding capability
- 1 SATA interface
- Up to 4-ch Ultra Motion Detection
- Up to 2-ch Smart Intrusion Prevention
- Supports two-way audio



XVR301-08Q4

- 8-ch analog video input
- 4-ch IP Video Input.Up to 12-ch IP video input
- Up to 8MP Lite@8, 3K Lite@12,5MP@6, 5MP Lite@12, 4MP@15,1080P@15 encoding capability
- 1 SATA interface
- Up to 8-ch Ultra Motion Detection
- Up to 4-ch Smart Intrusion Prevention
- Supports two-way audio



XVR301-16Q4

- 16-ch analog video input
- 8-ch IP Video Input.Up to 24-ch IP video input
- Up to 8MP Lite@8, 3K Lite@12,5MP@6,5MP Lite@12,4MP@15,1080P@15 encoding capability
- 1 SATA interfaces
- Up to 16-ch Ultra Motion Detection
- Up to 4-ch Smart Intrusion Prevention
- Supports two-way audio



XVR302-16Q4

- 16-ch analog video input
- 8-ch IP Video Input.Up to 24-ch IP video input
- Up to 8MP Lite@8, 3K Lite@12, 5MP@6, 5MP Lite@12, 4MP@15, 1080P@15 encoding capability.
- 2 SATA interfaces
- Up to 16-ch Ultra Motion Detection
- Up to 4-ch Smart Intrusion Prevention
- Supports two-way audio



XVR302-32Q4

- 32-ch analog video input
- 4-ch IP Video Input.Up to 36-ch IP video input
- Up to 8MP Lite@8, 3K Lite@12, 5MP@6, 5MP Lite@12, 4MP@15, 1080P@15 encoding capability.
- 2 SATA interfaces
- Up to 16-ch Ultra Motion Detection
- Up to 8-ch Smart Intrusion Prevention
- Supports two-way audio



XVR304-32Q3

- 32-ch analog video input
- 4-ch IP Video Input.Up to 36-ch IP video input
- Up to 8MP Lite@8,5MP Lite@12,4MP Lite@15, 1080P@25 encoding capability
- 4 SATA interfaces
- Up to 16-ch Ultra Motion Detection
- Up to 8-ch Smart Intrusion Prevention



XVR308-32Q3

- 32-ch analog video input
- 4-ch IP Video Input.Up to 36-ch IP video input
- Up to 8MP Lite@8, 5MP Lite@12,4MP Lite@15,1080P@25 encoding capability
- 8 SATA interfaces
- Up to 16-ch Ultra Motion Detection
- Up to 8-ch Smart Intrusion Prevention

U Series



XVR301-04U3-P4

- 4-ch analog video input
- 4-ch IP Video Input.Up to 8-ch IP video input
- Up to 8MP @8, 5MP @12,4MP @15,1080P@25 encoding capability
- 1 SATA interfaces
- Up to 4-ch Ultra Motion Detection
- Up to 2-ch Smart Intrusion Prevention



XVR301-04U3

- 4-ch analog video input
- 4-ch IP Video Input.Up to 8-ch IP video input
- Up to 8MP@8,5MP@12, 4MP@15,1080P@25 encoding capability
- 1 SATA interfaces
- Up to 4-ch Ultra Motion Detection
- Up to 2-ch Smart Intrusion Prevention



XVR301-08U3

- 8-ch analog video input
- 8-ch IP Video Input.Up to 16-ch IP video input
- Up to 8MP@8,5MP@12,4MP@15,1080P@25 encoding capability
- 1 SATA interface
- Up to 8-ch Ultra Motion Detection
- Up to 4-ch Smart Intrusion Prevention



XVR302-08U3

- 8-ch analog video input
- 8-ch IP Video Input.Up to 16-ch IP video input
- Up to 8MP@8, 3K@12, 5MP@12, 4MP@15, 1080P@25 encoding capability
- 2 SATA interfaces
- Up to 8-ch Ultra Motion Detection
- Up to 4-ch Smart Intrusion Prevention



XVR302-16U3

- 16-ch analog video input
- 16-ch IP Video Input.Up to 32-ch IP video input
- Up to 8MP@8, 5MP@12, 4MP@15, 1080P@25 encoding capability
- 2 SATA interfaces
- Up to 16-ch Ultra Motion Detection
- Up to 8-ch Smart Intrusion Prevention



SeekFree

EIA57128@PI

- Up to 128-ch real-time analysis
- Up to 768-ch sequence analysis
- 4TB HDD
- SeekFree
- Max. 400000 alarm videos clip(1080P, 10s)
- Choose any 30 types of all supported algorithms



SeekFree

EIA5764@PI

- Up to 64-ch real-time analysis
- Up to 512-ch sequence analysis
- 4TB HDD
- SeekFree
- Max. 400000 alarm videos clip(1080P, 10s)
- Choose any 30 types of all supported algorithms



SeekFree

EIA5732@PI

- Up to 32-ch real-time analysis
- Up to256-ch sequence analysis
- 4TB HDD
- SeekFree
- Max. 400000 alarm videos clip(1080P, 10s)
- Choose any 30 types of all supported algorithms



ECS-504S-SF-HA

- Up to 4-ch real-time analysis
- 128GB SSD
- SeekFree
- 20,000 alarm video clips(1080P, 10s)
- Choose any 20 types of all supported algorithms



ECS-508S-SF-HA

- Up to 8-ch real-time analysis
- 128GB SSD
- SeekFree
- 20,000 alarm video clips(1080P, 10s)
- Choose any 20 types of all supported algorithms



ECS-516S-SF-HD

- Up to 16-ch real-time analysis
- 1TB SSD
- SeekFree
- 150,000 alarm video clips(1080P, 10s)
- Choose any 20 types of all supported algorithms

Transmission

Switch (for SMB)



NSW3000-8T2GT-LPOE-IN

- 8×FE PoE+2×GE
- PoE power: 65W
- Support APP&WEB&imsportal&CS Clinet management



NSW3000-16T1GT1GC-LPOE-IN

- 16×FE PoE+1×GE RJ45+1×GE Combo
- PoE power: 150W
- Support APP&WEB&imsportal&CS Clinet management



NSW3000-24T1GT1GC-LPOE-IN

- 24×FE PoE+1×GE RJ45+1×GE Combo
- PoE power: 250W
- Support APP&WEB&imsportal&CS Clinet management



NSW3000-8T2GT-POE-IN

- 8×FE PoE+2×GE RJ45
- PoE power: 120W
- Support APP&WEB&imsportal&CS Clinet management



NSW3000-16T1GT1GC-POE-IN

- 16×FE PoE+1×GE+1×GE Combo
- PoE power: 250W
- Support APP&WEB&imsportal&CS Clinet management



NSW3000-24T1GT1GC-POE-IN

- 24×FE PoE+1×GE RJ45+1×GE Combo
- PoE power: 370W
- Support APP&WEB&imsportal&CS Clinet management



NSW2020-8T2GT-LPOE-IN

- 8×FE PoE+2×GE RJ45
- Support extend mode
- PoE power:65W



NSW2020-16T1GT1GC-LPOE-IN

- 16×FE PoE+1×GE RJ45+1×GE Combo
- Support extend mode&VLAN mode&PD keepalive
- PoE power: 150W



NSW2020-16T2GC-LPOE-IN

- 16×FE PoE+2×GE Combo
- Support extend mode&VLAN mode&PD keepalive
- PoE power:150W



NSW2020-24T1GT1GC-LPOE-IN

- 24×FE PoE+1×GE RJ45+1×GE Combo
- Support extend mode&VLAN mode&PD keepalive
- PoE power: 250W



NSW2020-24T2GC-LPOE-IN

- 24×FE PoE+2×GE Combo
- Support extend mode&VLAN mode&PD keepalive
- PoE power:250W



NSW3000-17GT1GP1GC-LPOE-IN

- 16×GE PoE+1×GE RJ45+1×GE SFP+1×GE Combo
- PoE power: 150W
- Support APP&WEB&imsportal&CS Clinet management



NSW3000-25GT1GP1GC-LPOE-IN

- 24×GE PoE+1×GE RJ45+1×GE SFP+1×GE Combo
- PoE power: 250W
- Support APP&WEB&imsportal&CS Clinet management



NSW3000-17GT1GP1GC-POE-IN

- 16×GE PoE+1×GE RJ45+1×GE SFP+1×GE Combo
- PoE power: 250W
- Support APP&WEB&imsportal&CS Clinet management



NSW3000-25GT1GP1GC-POE-IN

- 24×GE PoE+1×GE RJ45+1×GE SFP+1×GE Combo
- PoE power: 370W
- Support APP&WEB&imsportal&CS Clinet management



NSW3000-25GT1GP1GC-IN

- 24×GE RJ45+1×GE RJ45+1×GE SFP+1×GE Combo
- Support APP&WEB&imsportal&CS Clinet management



NSW1010-5T-IN

- 5×FE port



NSW1010-8T-IN

- 8×FE port



NSW1010-5GT-IN

- 5×GE RJ45



NSW1010-8GT-IN

- 8×GE RJ45



ISW5000-8GT4GP-POE-IN

- 8×GE PoE+4×GE SFP
- PoE power: 120W
- Supports L2 management functions



ISW2000-4T2GP-POE-IN

- 4×FE POE+2×GE SFP
- Support extend mode&VLAN mode
- PoE power: 65W



ISW2000-8T2GP-POE-IN

- 8×FE POE+2×GE SFP
- Support extend mode&VLAN mode
- PoE power: 120W



ISW2000-8GT2GP-IN

- 8×FE Ports+2×GE SFP
- Support extend mode&VLAN mode



NSW2020-6T-POE-IN-V2

- 4×FE POE+2×FE
- Support extend mode
- PoE power:65W



NSW2020-8T2GT-POE-IN

- 8×FE POE+2×GE RJ45
- Support extend mode
- PoE power: 120W



NSW2020-6T-POE-IN

- 4×FE POE+2×FE
- Support extend mode
- PoE power: 60W



NSW2020-10T-POE-IN

- 8×FE POE+2×FE
- Support extend mode
- PoE power:88W



NSW2020-16T1GT1GC-POE-IN

- 16×FE POE+1×GE RJ45+1×GE Combo
- Support extend mode&VLAN mode&PD keepalive
- PoE power: 225W



NSW2020-16T2GC-POE-IN

- 16×FE POE+2×GE Combo
- Support extend mode&VLAN mode&PD keepalive
- PoE power: 250W



NSW2020-24T1GT1GC-POE-IN

- 24×FE POE+1×GE RJ45+1×GE Combo
- Support extend mode&VLAN mode&PD keepalive
- PoE power: 370W



NSW2020-24T2GC-POE-IN

- 24×FE POE+2×GE Combo
- Support extend mode&VLAN mode&PD keepalive
- PoE power:370W



NSW2100-9GT1GP-LPOE-IN

- 8× GE POE+1×GE RJ45+1×GE SFP
- PoE power:65W
- Support APP&WEB&imsportal management



NSW2100-17GT1GP1GC-LPOE-IN

- 16×GE POE+1×GE RJ45+1×GE SFP+1×GE Combo
- PoE power:150W
- Support APP&WEB&imsportal management



NSW2100-25GT1GP1GC-LPOE-IN

- 24×GE POE+1×GE RJ45+1×GE SFP+1×GE Combo
- PoE power:250W
- Support APP&WEB&imsportal management



NSW2100-6GT-POE-IN

- 4×GE POE+2×GE RJ45
- PoE power:65W
- Support APP&WEB&imsportal management



NSW2100-9GT1GP-POE-IN

- 8×GE POE+1×GE RJ45+1×GE SFP
- PoE power: 120W
- Support APP&WEB&imsportal management



NSW2100-17GT1GP1GC-POE-IN

- 16×GE POE+1×GE RJ45+1×GE SFP+1×GE Combo
- PoE power: 250W
- Support APP&WEB&imsportal management



NSW2100-25GT1GP1GC-POE-IN

- 24×GE POE+1×GE RJ45+1×GE SFP+1×GE Combo
- PoE power: 370W
- Support APP&WEB&imsportal management



NSW2100-25GT1GP1GC-IN

- 24×GE+1×GE RJ45+1×GE SFP+1×GE Combo
- Support APP&WEB&imsportal management



NSW5110-24GT4GP-IN

- 24×GE RJ45 Port+2×GE Combo+2×GE SFP Slots
- Supports L2 management functions



NSW5610-48GT6×P-IN

- 48×GE RJ45 Ports+6×10Gbps SFP
- Supports L3 management functions



NSW5610-16GP8GC4×P-IN

- 16×GE SFP Ports+8×GE Combo+4×10Gbps SFP
- Supports L3 management functions

➡ Switch (for Enterprise Campus)



NSW5130-8GT2GP-POE-IN

- 8*GE PoE+2*GE SFP
- POE power:125W
- Support L2 management functions



NSW5130-8GT2GP-IN

- 8*GE RJ45+2*GE SFP
- Support L2 management functions



NSW5130-24GT4GP-POE-IN

- 24*GE PoE+4*GE SFP
- POE power:370W
- Support L2 management functions



NSW5130-24GT4GP-IN

- 24*GE RJ45 +4*GE SFP
- Support L2 management functions



NSW5130-48GT6XP-POE-IN

- 48*GE PoE+6*1G/10Gbps SFP+
- POE power: 459W
- Support L2 management functions



NSW5130-48GT4GP-IN

- 48*GE+4*GE SFP
- Support L2 management functions



NSW5630-24GP4XP-IN
 · 24*GE SFP + 4*10Gbps SFP+
 · Support L3 management functions



NSW5630-24GT4XP-IN
 · 24*GE+ 4*10Gbps SFP+
 · Support L3 management functions



NSW5630-48GT4XP-IN
 · 48*GE RJ45 + 4*10Gbps SFP+
 · Support L3 management functions



NSW5630-48GP4XP-IN
 · 48*GE SFP + 4*10Gbps SFP+
 · Support L3 management functions



NSW5660-28GP8XP-IN
 · 20*GE SFP+8*GE Combo+8*10G SFP+
 · Support L3 management functions



NSW5660-28GT8XP-IN
 · 20*GE + 8*GE Combo+8*10G SFP+
 · Support L3 management functions



NSW6630-48XP8CQ-IN
 · 48*1G/10G SFP(+) + 8*100GE QSFP28
 · Support L3 management functions



NSW6630-24XP2CQ-IN
 · 24*1G/10G SFP(+) +
 · 2*100GE QSFP28
 · Support L3 management functions



IN9800-A3-IN
 · IN9800 A3 Core switch shelf
 · Support L3 management functions



IN9800-A6-IN
 · IN9800 A6 Core switch shelf
 · Support L3 management functions



IN9800-A12-IN
 · IN9800 A12 Core switch shelf
 · Support L3 management functions



FB-IN9800-SFU-A6-IN
 · IN9800 A6 Switch Fabric Unit



FB-IN9800-SFU-A12-IN
 · IN9800 A12 Switch Fabric Unit



PWR-IN9800-AC650-A12-IN
 · IN9800 A12 Power Adapter(AC 650W)



PWR-IN9800-AC550-A3A6-IN
 · IN9800 A3A6 Power Adapter(AC 550W)



FB-IN9800-MPU-A3-IN
 · IN9800 A3 Main Control Module



FB-IN9800-MPU-A6-IN
 · IN9800 A6 Main Control Module



FB-IN9800-MPU-A12-IN
 · IN9800 A12 Main Control Module



FB-IN9800-8XP-IN
 · 8*1G/10G optical (SFP+)



FB-IN9800-48GP-IN
 · 48*100M/1000M optical (SFP)



FB-IN9800-48GT-IN
 · 48*10M/100M/1000M RJ45



FB-IN9800-48XP-IN
 · 48*1G/10G optical (SFP+)



FB-IN9800-24GT20GP4XP-IN
 · 24*GE RJ45 + 20*GE (SFP) + 4*1G/10G optical (SFP+)

Wireless Bridge



WLN-EB5N-IN
 · IP65
 · 12dBi
 · H:35°, V:35°
 · 12V Passive POE
 · 2*10/100Mbps
 · 24dBm
 · -40℃~65℃
 · Contact 6KV, Air 8KV



WLN-EB5E-IN
 · IP65
 · 15dBi
 · H:40°, V:15°
 · 24V Passive POE
 · 2*10/100Mbps
 · 27dBm
 · -40℃~65℃
 · Contact 6KV, Air 8KV

Accessories



SFP-GE-SX-MM850-IN
 · 850nm
 · 550m
 · 1.25Gb/s
 · LC Connector, Single Mode
 · 0 to 70℃



SFP-GE-LX-SM1310-IN
 · 1310nm
 · 10km
 · 1.25Gb/s
 · LC Connector, Single Mode
 · 0 to 70℃



FC-1GT1GP-20SC(TR)-IN
 · 1*10/100/1000M RJ45 port
 · 1*1000M fiber ports port
 · 4Gbps
 · 2.976Mpps
 · (-20~50℃)

Storage

IP SAN



VX1612-C@V3

- 3 10/100/1000 Mbps Ethernet interface;4-port 2.5GE interface module(optiona);2-port 10 GE SFP + interface module(option al);4-port 10 GE SFP + interface module(optional)
- JBOD and RAID 0,1, 5, 6
- Dedicated hot-spare disk and global hot-spare disk
- iSCSI
- 12 SATA interfaces
- default 1
- 89mm X 480mm X583mm (H×W×D)
- <186W (fully configured)



VX1616-C@V3

- 3 10/100/1000 Mbps Ethernet interface;4-port 2.5GE interface module(optional);2-port 10 GE SFP + interface module(option al);4-port 10 GE SFP + interface module(optional)
- JBOD and RAID 0,1, 5, 6
- Dedicated hot-spare disk and global hot-spare disk
- iSCSI
- 16 SATA interfaces
- default 1
- 131mm X 482mm X583mm (H×W×D)
- <231W(fully configured)



VX1624-C@V3

- 3 10/100/1000 Mbps Ethernet interface;4-port 2.5GE interface module (optional);2-port 10 GE SFP + interface module(optional);4-port 10 GE SFP + interface module(optional)
- JBOD and RAID 0,1, 5, 6
- Dedicated hot-spare disk and global hot-spare disk
- iSCSI
- 24 SATA interfaces
- default 1
- 175mm X 482mm X583mm (H×W×D)
- <331W (fully configured)



NI-VX1636-C@V3

- 3 10/100/1000 Mbps Ethernet interface;4-port 2.5GE interface module (optional);2-port 10 GE SFP + interface module(optional);4-port 10 GE SFP + interface module(optional)
- JBOD and RAID 0,1, 5, 6
- Dedicated hot-spare disk and global hot-spare disk
- iSCSI
- 36 SATA interfaces
- default 1
- 175mm X 482mm X583mm (H×W×D)
- <506W (fully configured)



NI-VX1648-C@V3

- 3 10/100/1000 Mbps Ethernet interface;4-port 2.5GE interface module (optional);2-port 10 GE SFP + interface module(optional);4-port 10 GE SFP + interface module(optional)
- JBOD and RAID 0,1, 5, 6
- Dedicated hot-spare disk and global hot-spare disk
- iSCSI
- 48 SATA interfaces
- default 1,optional 1
- 178mm X 482mm X801mm (H×W×D)
- <700W (fully configured)



VX1824-V3

- 5-port 2.5GE interface module;4-port 2.5GE interface module (optional);2-port 10 GE SFP + interface module(optional);4-port 10 GE SFP + interface module(optional)
- JBOD and RAID 0,1,10, 5, 50,6
- Dedicated hot-spare disk and global hot-spare disk
- iSCSI
- 24 SATA interfaces
- default 1,optional 1
- 175mm X 482mm X589mm (H×W×D)
- < 452 W (fully configured)



VX1848-V3

- 5-port 2.5GE interface module;4-port 2.5GE interface module (optional);2-port 10 GE SFP + interface module(optional);4-port 10 GE SFP + interface module(optional)
- JBOD and RAID 0,1,10, 5, 50,6
- Dedicated hot-spare disk and global hot-spare disk
- iSCSI
- 48 SATA interfaces
- default 1, optional 1
- 178mm X 482mm X801mm (H×W×D)
- <800 W (fully configured)



VX3024-V3

- 10-port 2.5GE interface module;4-port 2.5GE interface module (optional);2-port 10 GE SFP + interface module(optional);4-port 10 GE SFP + interface module(optional)
- JBOD and RAID 0,1,10, 5, 50,6
- Dedicated hot-spare disk and global hot-spare disk
- iSCSI
- 24 SATA/SAS/NL SAS interfaces
- 2 default (1+1)
- 175mm X 482mm X589mm (H×W×D)
- < 550 W (fully configured)

Distributed Video Storage



VX3048-V3

- 10-port 2.5GE interface module;4-port 2.5GE interface module (optional);2-port 10 GE SFP + interface module(optional);4-port 10 GE SFP + interface module(optional)
- JBOD and RAID 0,1,10, 5, 50,6
- Dedicated hot-spare disk and global hot-spare disk
- iSCSI
- 48 SATA/SAS/NL SAS interfaces
- 2 default (1+1)
- 178mm X 482mm X801mm (H×W×D)
- <700 W (fully configured)



CX1816-V3

- JBOD and RAID 0,1,5,6
- 5 *2.5Gbps Ethernet ports;4-port 2.5Gbps Ethernet interface (optional);2-port 10 Gigabit Ethernet interface (optional);4-port 10 Gigabit Ethernet interface (optional)
- iSCSI
- SATA/SSD
- 1+1 redundancy
- 175mm X 482mm X589mm
- <347W



CX1824-V3

- JBOD and RAID 0,1,5,6
- 5 *2.5Gbps Ethernet ports;4-port 2.5Gbps Ethernet interface (optional);2-port 10 Gigabit Ethernet interface (optional);4-port 10 Gigabit Ethernet interface (optional)
- iSCSI
- SATA/SSD
- 1+1 redundancy
- 175mm X 482mm X589mm
- <452W



CX1836-V3

- JBOD and RAID 0,1,5,6
- 5 *2.5Gbps Ethernet ports;4-port 2.5Gbps Ethernet interface (optional);2-port 10 Gigabit Ethernet interface (optional);4-port 10 Gigabit Ethernet interface (optional)
- iSCSI
- SATA/SSD/SAS/NL-SAS
- 1+1 redundancy
- 175mm X 482mm X583mm
- <583W



CX1848-V3

- JBOD and RAID 0,1,5,6
- 5 *2.5Gbps Ethernet ports;4-port 2.5Gbps Ethernet interface (optional);2-port 10 Gigabit Ethernet interface (optional);4-port 10 Gigabit Ethernet interface (optional)
- iSCSI
- SATA/SSD/SAS/NL-SAS
- 1+1 redundancy
- 178mm X 482mm X800mm
- <800W

➤ Disk Enclosure

			
DE1824-V3 · 2-port 4*12 Gbps Mini SAS HD · 24 SATA HDD interfaces · 175mm X 482mm X589mm (H×W×D)	DE1848-V3 · 2-port 4*12 Gbps Mini SAS HD · 48 SATA HDD interfaces · 178mm X 482mm X801mm (H×W×D)	DE3124-V3 · 4-port 4*12 Gbps Mini SAS HD · 24 SATA HDD interfaces · 175mm X 482mm X589mm (H×W×D)	DE3148-V3 · 4-port 4*12 Gbps Mini SAS HD · 48 SATA HDD interfaces · 178mm X 482mm X801mm (H×W×D)




➤ Flash Memory - White Card

			
White Card:TF-32G-T-C · 32GB · TLC · C10/U1/V10/A1 · Max read speed:70MB/s · Max write speed:30MB/s · FAT32 · 0℃~70℃	White Card:TF-64G-T-C · 64GB · TLC · C10/U1/V10/A1 · Max read speed:75MB/s · Max write speed:35MB/s · exFAT · 0℃~70℃	White Card:TF-128G-T-C · 128GB · TLC · C10/U1/V10/A1 · Max read speed:75MB/s · Max write speed:35MB/s · exFAT · 0℃~70℃	White Card:TF-256G-T-C · 256GB · TLC · C10/U1/V10/A1 · Max read speed:75MB/s · Max write speed:35MB/s · exFAT · 0℃~70℃

➤ Flash Memory - Blue Card

			
Blue Card:TF-32G-T-L · 32GB · TLC · C10/U1/V10/A1 · Max read speed:90MB/s · Max write speed:65MB/s · FAT32 · 0℃~70℃	Blue Card:TF-64G-T-L · 64GB · TLC · C10/U1/V10/A1 · Max read speed:90MB/s · Max write speed:65MB/s · exFAT · 0℃~70℃	Blue Card:TF-128G-T-L · 128GB · TLC · C10/U1/V10/A1 · Max read speed:90MB/s · Max write speed:65MB/s · exFAT · 0℃~70℃	Blue Card:TF-256G-T-L · 256GB · TLC · C10/U1/V10/A1 · Max read speed:90MB/s · Max write speed:65MB/s · exFAT · 0℃~70℃

➤ Flash Memory - Purple Card

			
Purple Card:TF-32G-T · 32GB · TLC · C10/U1/V10/A1 · Max read speed:100MB/s · Max write speed:20MB/s · FAT32 · 0℃~70℃	Purple Card:TF-64G-T · 64GB · TLC · C10/U3/V30/A2 · Max read speed:100MB/s · Max write speed:40MB/s · exFAT · 0℃~70℃	Purple Card:TF-128G-T · 128GB · TLC · C10/U3/V30/A2 · Max read speed:100MB/s · Max write speed:80MB/s · exFAT · 0℃~70℃	Purple Card:TF-256G-T · 256GB · TLC · C10/U3/V30/A2 · Max read speed:100MB/s · Max write speed:80MB/s · exFAT · 0℃~70℃

➤ Flash Memory - Red Card

			
Red Card:TF-32G-MT · 32GB · MLC/TLC · C10/U1/V10/A1 · Max read speed:95MB/s · Max write speed:65MB/s · FAT32 · -25℃~85℃	Red Card:TF-64G-MT · 64GB · MLC/TLC · C10/U3/V30/A1 · Max read speed:95MB/s · Max write speed:70MB/s · exFAT · -25℃~85℃	Red Card:TF-128G-MT · 128GB · MLC/TLC · C10/U3/V30/A1 · Max read speed:95MB/s · Max write speed:70MB/s · exFAT · -25℃~85℃	Red Card:TF-256G-MT · 256GB · MLC/TLC · C10/U3/V30/A1 · Max read speed:95MB/s · Max write speed:70MB/s · exFAT · -25℃~85℃

➤ Flash Memory - Solid State Disk

			
Solid State Disk:SSD-128G-S3 · 128GB · 3D TLC · SATA III · Max sequential read:550MB/s · Max sequential write:490MB/s · Max random read (4KB):37K IOPS · Max random write (4KB):38K IOPS	Solid State Disk:SSD-256G-S3 · 256GB · 3D TLC · SATA III · Max sequential read:560MB/s · Max sequential write:510MB/s · Max random read (4KB):45K IOPS · Max random write (4KB):40K IOPS	Solid State Disk:SSD-512G-S3 · 512GB · 3D TLC · SATA III · Max sequential read:560MB/s · Max sequential write:510MB/s · Max random read (4KB):49K IOPS · Max random write (4KB):44K IOPS	Solid State Disk:SSD-1024G-S3 · 1TB · 3D TLC · SATA III · Max sequential read:560MB/s · Max sequential write:510MB/s · Max random read (4KB):49K IOPS · Max random write (4KB):44K IOPS
			
Solid State Disk:SSD-2048G-S3 · 2TB · 3D TLC · SATA III · Max sequential read:560MB/s · Max sequential write:510MB/s · Max random read (4KB):49K IOPS · Max random write (4KB):44K IOPS	SSD-256G-P3-M2 · 256GB · 3D TLC · M.2 · Max sequential read:3100MB/s · Max sequential write:1300MB/s · Max random read (4KB):80K IOPS · Max random write (4KB):126K IOPS	SSD-512G-P3-M2 · 512GB · 3D TLC · M.2 · Max sequential read:2800MB/s · Max sequential write:1700MB/s · Max random read (4KB):80K IOPS · Max random write (4KB):153K IOPS	SSD-1024G-P3-M2 · 1024GB · 3D TLC · M.2 · Max sequential read:3000MB/s · Max sequential write:2600MB/s · Max random read (4KB):222K IOPS · Max random write (4KB):164K IOPS

Server Products

➤ Edge Computing Server



- VS-R3712S-AM-IN**
- Intel i5-12500
 - 16GB, total 4 slots
 - GE*3, supports PCIe network interface expansion
 - 4*2.5/3.5-inch SATA HDDs
 - 4T SATA HDD*1
 - 438mm(W)*570mm(D)*44 mm(H)

➤ Computation Server



- VS-R5420-B1H**
- Intel XEON 4510 (12core,2.4GHz) * 1, support 2 * 5th Gen Intel® Xeon® Scalable Processors
 - 32GB, total 16 slots
 - GE*4, supports PCIe network interface expansion
 - 12*2.5/3.5-inch SAS/SATA/SSD HDDs
 - 4T SATA HDD*1
 - 447mm(W)*817mm(D)*87.6mm(H)



- VS-R5420-B2T**
- Intel XEON 4510 (12core,2.4GHz) * 2, support 2* 5th Gen Intel® Xeon® Scalable Processors
 - 32GB*2, total 32 slots
 - GE*4, supports PCIe network interface expansion
 - 12*2.5/3.5-inch SAS/SATA/SSD HDDs
 - 4T SATA HDD*1
 - 447mm(W)*817mm(D)*87.6mm(H)

➤ Generic Server



- VS-R5428S-C2X**
- Intel XEON 4514Y(16core,2GHz) * 2, support 2 * 5th Gen Intel® Xeon® Scalable Processors
 - 32GB*4, total 32 slots
 - 1GE*2, 10GE*2, supports PCIe network interface expansion
 - 12*2.5/3.5-inch SAS/SATA/SSD HDDs
 - 8T SATA HDD*1
 - Supports 2*DWFHFL GPU cards or 4*SWFHFL GPU cards or 8*SWH-HHL GPU cards (Sold separately)
 - 447mm(W)*817mm(D)*87.6mm(H)



- VS-R5448D-C2V**
- Intel XEON 4514Y(16core,2GHz) * 2, support 2 * 5th Gen Intel® Xeon® Scalable Processors
 - 32GB*8, total 32 slots
 - 1GE*2, 10GE*2, supports PCIe network interface expansion
 - 8*2.5/3.5-inch SAS/SATA/SSD HDDs,
 - 1*2.5/3.5-inch NVMe
 - 8T SATA HDD*1,1.92TB SATA SSD*1
 - Supports 8*DWFHFL GPU cards (Sold separately)
 - 482mm(W)*946mm(D)*175mm(H)

VMS



- VMS-B180-A**
- Video management; Video wall; Event management; Access control basic function; People counting
 - Vehicle entrance/exit; Maintanance;App; Dual-machine Hot Standby; Dashboard
 - Total device management capability:250
 - Total channel management capability:500
 - Cloud device management capability:250
 - Incoming bandwidth:512Mbps Outgoing bandwidth:384Mbps
 - Alarm receiving and forwarding performance:100 alarms per second
 - Operating environment temperature:-10°C to 55°C (recommended: 0°C to 50°C)
 - Operating environment humidity:10RH% to 90RH% (noncondensing)
 - RAM:4GB
 - HDD:1 (No HDD is included at delivery)
 - Storage media:eMMC 16GB
 - Disk slot:1
 - Power:100V to 240V AC input, 50Hz/60Hz
 - Dimensions (with front panel) (H x D x W):48mm×345.5mm×440mm/1U(front panel is not removable)
 - ≤4kg (without HDD)



- Unicorn**
- Video management; Video wall; Event management; Access control basic function; People counting
 - Vehicle entrance/exit; Maintanance; App; Dual-machine Hot Standby; Dashboard
 - Total device management capability:1000
 - Total channel management capability:2000
 - Cloud device management capability:256
 - Incoming bandwidth:512Mbps
 - Outgoing bandwidth:384Mbps
 - Storage stream bandwidth:512Mbps
 - Alarm receiving and forwarding performance:100 alarms per second
 - Number of central playback channels:24 channels
 - Built-in DC decoding capability:3 ports, total 4-ch 4K@30, 16-ch 1080p@30, 36-ch 720p@30, 64-ch D1@30
 - Decoding resolution:12MP/8MP/6MP/5MP/4MP/3MP/1080P/960P/720P/960H/D1/2CIF/CIF/QCIF
 - Built-in decoding output:2 x HDMI and 1 x VGA support independent outputs; both HDMI interfaces support 4K decoding and display
 - Operating environment temperature:-10°C to 55°C
 - Operating environment humidity:10%-90% (noncondensing)
 - RAM:4GB
 - HDD:16 (No HDD is included at delivery)
 - Storage media:eMMC 16GB
 - Disk slot:16
 - Power:100V to 240V AC;Supports dual-power redundancy
 - Expansion power module slot (PSU1):Standard: 1 x 300W power module, expansion: 1+1 redundancy (different from B800)
 - Dimensions (with front panel) (H x D x W):3U, fits in 19” standard cabinet;130.5mm×492mm×481.6mm (remove front panel for HDD installation)
 - ≤ 10.0 kg (not including cards, power module, HDD)



UG-I500-H16-IN(NEW)

- Video management
- Video wall
- Event management
- Access control basic function
- Access control advanced function (threaten code, Multiple authentication, Multi door interlock, Anti-passback, etc.)
- Attendance
- Intercom
- Vistor
- People counting
- Vehicle entrance/exit
- Parking lot
- Elevator
- Maintenance
- Support Acusearch Acutrack Seekfree with intelligent device
- Third party interface embedding
- Patrol
- 3D map
- Customized dashboard
- Tracking map
- AR
- Video Diagnosis
- App
- Dual-machine Hot Standby
- Dashboard
- Total device management capability:1000
- Total channel management capability:2000
- Cloud device management capability:256
- Incoming bandwidth:650Mbps
- Outgoing bandwidth:650Mbps
- Storage stream bandwidth:650Mbps
- Alarm receiving and forwarding performance:150 alarms per second
- Number of central playback channels:30 channels
- Operating environment temperature:-10°C to 55°C
- Operating environment humidity:10%-90% (noncondensing)
- RAM:32GB
- HDD:16 (No HDD is included at delivery)
- Storage media:SSD 128GB
- Disk slot:16
- Power:100V to 240V AC input,50Hz/60Hz ;Supports dual-power redundancy
- Expansion power module slot (PSU1):Standard: 1x 350W power module; expansion: 1+1redundancy
- Dimensions (with front panel) (H x D x W):3U, fits in 19” standard cabinet ;131.5mmx533mmx481.6mm (remove front panel for HDD installation)
- ≤12.0 kg (not including cards, power module,HDD)

➡ **Edge Computing Server**



UNV Guard

(Software, the performance based on the following hardware specifications)

- Performace can be expended through adding extra server
- CPU:Intel i7-12700;/Intel Xeno E-2378
- RAM:32GB or above
- Network card:GbE x 2
- System disk:SATA-II 7200 RPM Enterprise;Class HDD
- Operating system:Windows Server 2012 64-bit or above
- Encoding device (IPC, NVR):2000
- Ordinary video channel:10000
- Intelligent analysis terminal/server (Smart Box edge algorithm mode):64
- Intelligent video channel (LPR, multi-target detection, people counting):2000
- Decoding device :32
- Storage server/device :64
- Access control device (including access controllers):256
- Access control channel/door:1000
- Video intercom (door station):256
- Video intercom (indoor station) :5000
- Role:500
- User:3000
- Incoming bandwidth:300x2Mbps
- Outgoing bandwidth:300x2Mbps
- Receive events/alarms without images per second:400 records/per second
- Receive events/alarms with images per second:40 records/per second
- Push events/alarms to client per second:100 events/alarms
- Video management
- Video wall
- Event management
- Access control
- Attendance
- Intercom
- Vistor
- People counting
- Vehicle entrance/exit
- Parking lot
- Elevator
- Maintenance
- Support Acusearch ; Search by text ; Seekfree
- Third party interface embedding
- Patrol
- 3D map
- Customized dashboard
- Tracking map
- AR
- Video Diagnosis
- App
- Dual-machine Hot Standby
- Dashboard
- BS, CS, APP or H5

Smart Management BOX



- SMBOX02-R**
- Solar Power:DC 10.8 V to DC 14.4 V, 12A
 - IP56
 - 650 (H) × 424 (W) × 230 (D) mm
 - NVR in the BOX: 8 PoE ports, Alarm I/O: 4/2, without hard drive 8*UMD, 4*SIP, 2*FR.



- SMBOX01-R-US**
- City Power:AC 100 V to 240 V
 - IP56
 - 650 (H) × 424 (W) × 230 (D) mm
 - NVR in the BOX: 8 PoE ports, Alarm I/O: 4/2, without hard drive 8*UMD, 4*SIP, 2*FR.



- SMBOX01-R-EU**
- City Power:AC 100 V to 240 V
 - IP56
 - 650 (H) × 424 (W) × 230 (D) mm
 - NVR in the BOX: 8 PoE ports, Alarm I/O: 4/2, without hard drive 8*UMD, 4*SIP, 2*FR.



- SMBOX02**
- Solar Power:DC 10.8 V to DC 14.4 V, 12A
 - IP56
 - 650 (H) × 424 (W) × 230 (D) mm
 - Built-in bracket for 90–225 mm H × 0–185 mm W × 0–63 mm D devices, no NVR, and 48V power port reserved.



- SMBOX01-US**
- City Power:AC 100 V to 240 V
 - IP56
 - 650 (H) × 424 (W) × 230 (D) mm
 - Built-in bracket for 90–225 mm H × 0–185 mm W × 0–63 mm D devices, no NVR, and 48V power port reserved.



- SMBOX01-EU**
- City Power:AC 100 V to 240 V
 - IP56
 - 650 (H) × 424 (W) × 230 (D) mm
 - Built-in bracket for 90–225 mm H × 0–185 mm W × 0–63 mm D devices, no NVR, and 48V power port reserved.

Display & Control

IT Monitors - B Series



- MW-LC22-B**
- 22"
 - 1920 × 1080
 - 250 nits
 - 100 Hz Refresh Rate
 - IPS Panel, 1300:1
 - HDMI, VGA



- MW-LC24-B2**
- 24"
 - 1920 × 1080
 - 250 nits
 - 120 Hz Refresh Rate
 - IPS Panel, 1500:1
 - HDMI, VGA



- MW-LC27-B2**
- 27"
 - 1920 × 1080
 - 250 nits
 - 100 Hz Refresh Rate
 - IPS Panel, 1000:1
 - HDMI, VGA

IT Monitors - E Series



- MW-LC22-E**
- 22"
 - 1920 × 1080
 - 250 nits
 - 100 Hz Refresh Rate
 - VA Panel, 3000:1
 - HDMI, VGA



- MW-LC24-E**
- 24"
 - 1920 × 1080
 - 250 nits
 - 100 Hz Refresh Rate
 - VA Panel, 4000:1
 - HDMI, VGA



- MW-LC27-E**
- 27"
 - 1920 × 1080
 - 250 nits
 - 100 Hz Refresh Rate
 - VA Panel, 4000:1
 - HDMI, VGA

CCTV Monitors - Entry Series



- MW3222-V2**
- 22"
 - 1920 × 1080
 - 250 nits
 - 100 Hz Refresh Rate
 - VA Panel, 3000:1
 - HDMI, VGA
 - Built-in speaker



- MW3224-V2**
- 24"
 - 1920 × 1080
 - 250 nits
 - 100 Hz Refresh Rate
 - IPS Panel, 1300:1
 - HDMI, VGA
 - Built-in speaker



- MW3232-V-K2**
- 32"
 - 1920 × 1080
 - 300 nits
 - 75 Hz Refresh Rate
 - VA Panel, 4000:1
 - HDMI, VGA
 - Built-in speaker



MW3243-F-V2

- 43"
- 3840 × 2160
- 300 nits
- 60 Hz Refresh Rate
- IPS Panel, 1200:1
- HDMI, DP
- Built-in speaker



MW3255-F-V2

- 55"
- 3840 × 2160
- 300 nits
- 60 Hz Refresh Rate
- IPS Panel, 1200:1
- HDMI, DP
- Built-in speaker



MW3265-F

- 65"
- 3840 × 2160
- 350 nits
- 60 Hz Refresh Rate
- IPS Panel, 1200:1
- HDMI, DP
- Built-in speaker

🔗 CCTV Monitors - Pro Series



MW3232-E

- 32"
- 1920 × 1080
- 300 nits
- 60 Hz Refresh Rate
- IPS Panel, 1400:1
- HDMI, VGA, DVI
- Built-in speaker



MW3243-E

- 43"
- 1920 × 1080
- 300 nits
- 60 Hz Refresh Rate
- IPS Panel, 1200:1
- HDMI, VGA, DVI
- Built-in speaker



MW3275-F

- 75"
- 3840 × 2160
- 350 nits
- 60 Hz Refresh Rate
- IPS Panel, 1200:1
- HDMI, DP, VGA, DVI
- Built-in speaker



MW3286-F

- 86"
- 3840 × 2160
- 350 nits
- 60 Hz Refresh Rate
- IPS Panel, 1200:1
- HDMI, DP, VGA, DVI
- Built-in speaker

🔗 Interactive Flat Panel Displays



U-X Series

- 65"/75"/86"
- 4-core CPU, 4 GB + 32 GB
- Android 13.0
- 4K, 350 nits brightness



U-CE Series

- 65"/75"/86"
- 8-core CPU, 8 GB + 128 GB
- Android 13.0, Google EDLA certified
- 4K, 350 nits brightness
- 8MP camera and 8-mic array(optional)



U-E2 Series

- 65"/75"/86"
- 8-core CPU, 8 GB + 128 GB
- Android 13.0, Google EDLA certified
- 4K, 350 nits brightness
- 8MP camera and 8-mic array(optional)

🔗 Digital Signages - Indoor



MW3332-G

- 32"
- 1920 × 1080
- 500 nits brightness
- Android 11.0, 4GB, 32GB



MW3343-G

- 43"
- 1920 × 1080
- 500 nits brightness
- Android 11.0, 4GB, 32GB



MW3355-G

- 55"
- 3840 × 2160
- 500 nits brightness
- Android 11.0, 4GB, 32GB



MW3365-G

- 65"
- 3840 × 2160
- 500 nits brightness
- Android 11.0, 4GB, 32GB



MW3343-L

- 43"
- 1080 × 1920
- 500 nits brightness
- Android 11.0, 4GB, 32GB



MW3355-L

- 55"
- 2160 × 3840
- 500 nits brightness
- Android 11.0, 4GB, 32GB



MW3355-G-E

- 55"
- 3840 × 2160
- 2500 nits brightness
- Android 11.0, 4GB, 32GB

🔗 Digital Signages - Outdoor



MW3343-GW

- 43"
- 1920 × 1080
- 2500 nits brightness
- Android 11.0, 4GB, 32GB



MW3355-GW

- 55"
- 3840 × 2160
- 2500 nits brightness
- Android 11.0, 4GB, 32GB



MW3355-LW

- 55"
- 2160 × 3840
- 2500 nits brightness
- Android 11.0, 4GB, 32GB



MW3365-LW

- 65"
- 2160 × 3840
- 2500 nits brightness
- Android 11.0, 4GB, 32GB

Access Control



ER-501

- 1/2/4 door optional
- Support Wiegand, RS485
- 20,000 card capacity
- 50,000 events storage
- Support fire alarm and other alarm interface



ER-601

- 1/2/4 door optional
- Support Wiegand, RS485
- 200,000 card capacity
- 300,000 events storage
- Support backup power
- Support fire alarm and other alarm interface

🔗 Reader



OEC-R3H-MK

- Support Wiegand/RS485 data output
- Built-in buzzer
- Support indoor and outdoor application
- Stable, sensitive, and responsive
- Support ISO 14443-A and ISO 14443-B protocols



OEC-R3H-M

- Support Wiegand/RS485 data output.
- Built-in buzzer
- Support indoor and outdoor application.
- Stable, sensitive, and responsive
- Support ISO 14443-A and ISO 14443-B protocols



OEC-W2D-M

- Supports USB power supply
- Support Mifare card
- Support reading card numbers and writing data to a card's specified sectors

🔗 Smart Access Control Terminals



OET-251H-M

- Touch Screen, Size:4 inch, Resolution: 480×800
- Accuracy rate > 99%, false rate < 1%, fast recognition speed (up to 0.2s)
- Smart recognition capacity: 10,000
- Fastest recognition time 0.2 seconds



OET-573B-HMQR-Z-W-R

- Touch Screen, Size:7 inch, Resolution: 600×1024
- Accuracy rate > 99%, false rate < 1%, fast recognition speed (up to 0.2s)
- smart recognition capacity: 50,000
- Support QR Code
- Support WiFi



OET-573B-HM-Z-R

- Touch Screen, Size:7 inch, Resolution: 600×1024
- Accuracy rate > 99%, false rate < 1%, fast recognition speed (up to 0.2s)
- Smart recognition capacity: 20,000
- Fastest recognition time 0.2 seconds



OEU-201S-HMK-W

OEI-372S-H-W

Door & Indoor Station

Cloud-based video intercom, access anywhere, anytime



Supports Mobile Control



Power over Ethernet(POE) Supply



Supports 2-Channel Electric Lock Output



Integrated with Security Cameras

Video Intercom

Indoor Station



OEI-372S-H-W

- 7-inch indoor station
- 7-inch ultra-thin TFT screen
- DC 12V or Standard POE(802.3af)
- SD card, max 32G(Optional)

Doorbell



ED-525B-WB

- 3MP camera
- Support motion detection, human body detection
- 2MP camera
- Support package detection

Villa Door Station



OEU-201S(B)-HMK-W

- Villa door station
- 2 MP camera with IR supplement
- Metal or Plastic, IP65
- DC 12V or Standard POE(802.3af)
- Built-in IC card reader
- Support WiFi



OEU-201S-HMK-Z

- Villa door station
- 2 MP camera with IR supplement
- Metal or Plastic, IP65
- DC 12V or Standard POE(802.3af)
- Built-in IC card reader
- Support WiFi

Apartment Door Station



OEU-202S-HMK1/2/4

- Villa door station
- 2 MP camera with IR supplement
- Metal, 2/4 buttons, IP65
- DC 12V or Standard POE(802.3af)
- Built-in IC card reader
- Support WiFi



OEU-301E(S)-HMKA

- Apartment door station
- 2 MP camera with IR supplement
- Metal, keyboard, IP65
- DC 12V or Standard POE(802.3af)
- Built-in IC card reader
- Support WiFi



Economy Meets Durability

UNV Tripod OFG5311 | OFG5312



Easy Integration

Can work with both UNV and third party access control system



Durable


MCBF > 3,000,000



Effective


Up to 20-30 person per minute

Speed Gates



OFG-8501N Series

- Side 1.2mm, Top 1.5mm
- 304 Brushed Stainless Steel
- High-quality Brushless Dc Motor
- 16 pairs of IR light curtains improve detection accuracy
- Multiple Options For Lane Width
- 15 Million Times Mcbf
- Indoor And Outdoor Use

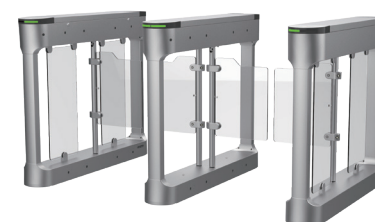

OFG-8321N Series

- Side 1.2mm
- 304 Brushed Stainless Steel
- High-quality Brushless Dc Motor
- 6 pairs of IR light curtains improve detection accuracy
- Multiple Options For Lane Width
- 5 Million Times Mcbf
- Indoor And Outdoor Use



OFG-5312 Series

- Side 1.0mm, Top 1.2mm
- 304 Brushed Stainless Steel
- Lane Width: 550mm
- 2 Million Times Mcbf
- Indoor And Outdoor Use



OFG-5311 Series

- Side 1.0mm, Top 1.2mm
- 304 Brushed Stainless Steel
- Lane Width: 550mm
- 2 Million Times Mcbf
- Indoor And Outdoor Use