



PRODUCT QUICK GUIDE
**CCTV CHANNEL
PRODUCTS**

2021 H1

HIKVISION[®]

CONTENTS

001

Turbo HD Camera

002 Hikvision
ColorVu Series
009 Ultra Series
012 Pro Series
022 Value Series
043 Special Series

044

Turbo HD PTZ
Camera

045 AE7
046 AE5
047 AE4

048

DVR

049 Hikvision
AcuSense Series
054 Ultra Series
058 Pro Series
064 Value Series
067 Special Series

068

Encoder

068 DVS

072

Network Camera

073 Pro Series (EasyIP)
101 Value Series

111

PTZ Dome
Camera

112 Pro Series (EasyIP)
118 Value Series

120

Panoramic
Camera

121 PanoVu Series
122 Fisheye Series

123

NVR

124 Pro Series (EasyIP)
132 Value Series

135

KIT

137 Wi-Fi Series
138 PoE Series

139

Thermal

140 HeatPro Series

142

Monitor

143 Pro Series
146 Value Series

149

Switch

151 Ultra Series
152 Pro Series
162 Value Series

165

Cable

166 Coaxial Cable
167 Network Cable

169

**Controller &
Transmission**

170 Keyboard
172 Wireless Bridge

174

Software

175 Hik-ProConnect

177

Accessories

178 Brackets and Housings
222 Power Adapter
224 Camera Tester
225 Pickup

HIKVISION ACUSENSE

A sense of safety is one of the most basic human needs, and that goes for both personal and property safety. And this is exactly why people install security systems in their homes and businesses.

Compared to conventional sensor-based alarm systems, a video-based security system that utilizes cameras has several advantages: the ability to watch events in real-time over the live feed, capture critical data around those events, and provide solid and accurate evidence for law enforcement.

AcuSense technology adds a touch of intelligence to Hikvision's popular cameras and video recorders, making them perfect for an accessible and intelligent security system. Based on deep learning technology, AcuSense helps you focus on human and vehicle events in two ways: alarms will only trigger when the preset type of intrusion takes place, and video footage is sorted by target-type categories for easier searching through recorded footage. Strobe light and audio alarms serve as virtual security guards, protecting users from potential risks by warding off intruders. When emergencies occur, related videos are classified into human and vehicle categories for quick search and retrieval.

Sophisticated, highly effective, and affordable, the AcuSense solution provides SMB owners and operators an intelligent and easy-to-use protection system for their property and assets, while helping resellers build a uniquely competitive go-to-market proposition.

AcuSense



FOCUS
and ACT

AcuSense
Technology



The logo for ColorVu Cameras, featuring the word "ColorVu" in a multi-colored font and "Cameras" in a grey font below it, all set against a dark blue background.A graphic showing a clock face with "24 Hours" and a multiplication sign followed by "7 Colorful Imaging", indicating 24x7 color imaging capability.

View in color,
Even in darkness

HIKVISION COLORVU

Darkness provides cover for theft, trespassing, and other crimes. When incidents occur at night, dim, low-quality images from conventional cameras miss or lose critical details. Cameras with infrared LEDs are able to provide extra light for clearer image, but in black-and-white.

But now, imagine capturing vivid, colorful details – such as the color of people’s clothing or of a car – even in total darkness. Hikvision ColorVu Technology makes this possible.

Hikvision ColorVu Technology enables front-end products to capture details in low light with three advantages: advanced hardware, superior ISP algorithm, and reliable quality control. ColorVu technology employs two specific breakthroughs in hardware technology: advanced lenses and powerful sensors. These lenses reach up to F1.0, allowing more light to enter and thereby increasing image brightness. Next, high-sensitivity sensors vastly improve the utilization of that light. The frontier ISP algorithm realizes precise color rendition to produce accurate colorful images. Moreover, active alignment technology guarantees the focusing performance of lenses in the mass production of ultra-high definition ColorVu products, resulting in superlative quality control.


Extreme light conditions are also taken into consideration in the design process. Some cameras are equipped with warm, natural-looking supplemental lighting. This way, when there is no light source whatsoever – even starlight or street lights – they can guarantee colorful imaging. For most scenes, the environmental light is bright enough for ColorVu cameras to render vivid color without supplemental lighting.

The ColorVu logo, featuring a multi-colored "C" followed by the text "ColorVu" in a grey font.

4K


With the development of 4K technology quickly coming into focus, opportunities to use this technology in security will continue to grow. As a leading video security equipment manufacturer, Hikvision has paid close attention to the rise in high-resolution imaging, and launched a total 4K system to harness this technology in the global security industry.

Without complementary 4K components, such as monitors and DVRs / NVRs, 4K cameras cannot be used to their full potential, and therefore have little practical use in video security. By building a total system – complete with cameras, DVRs, NVRs, and more – Hikvision provides systems that are more helpful and more useful to customers. The Hikvision 4K system, which comes equipped with a variety of smart functions, satisfies the security industry's need for ultra-high resolution and smart video monitoring.

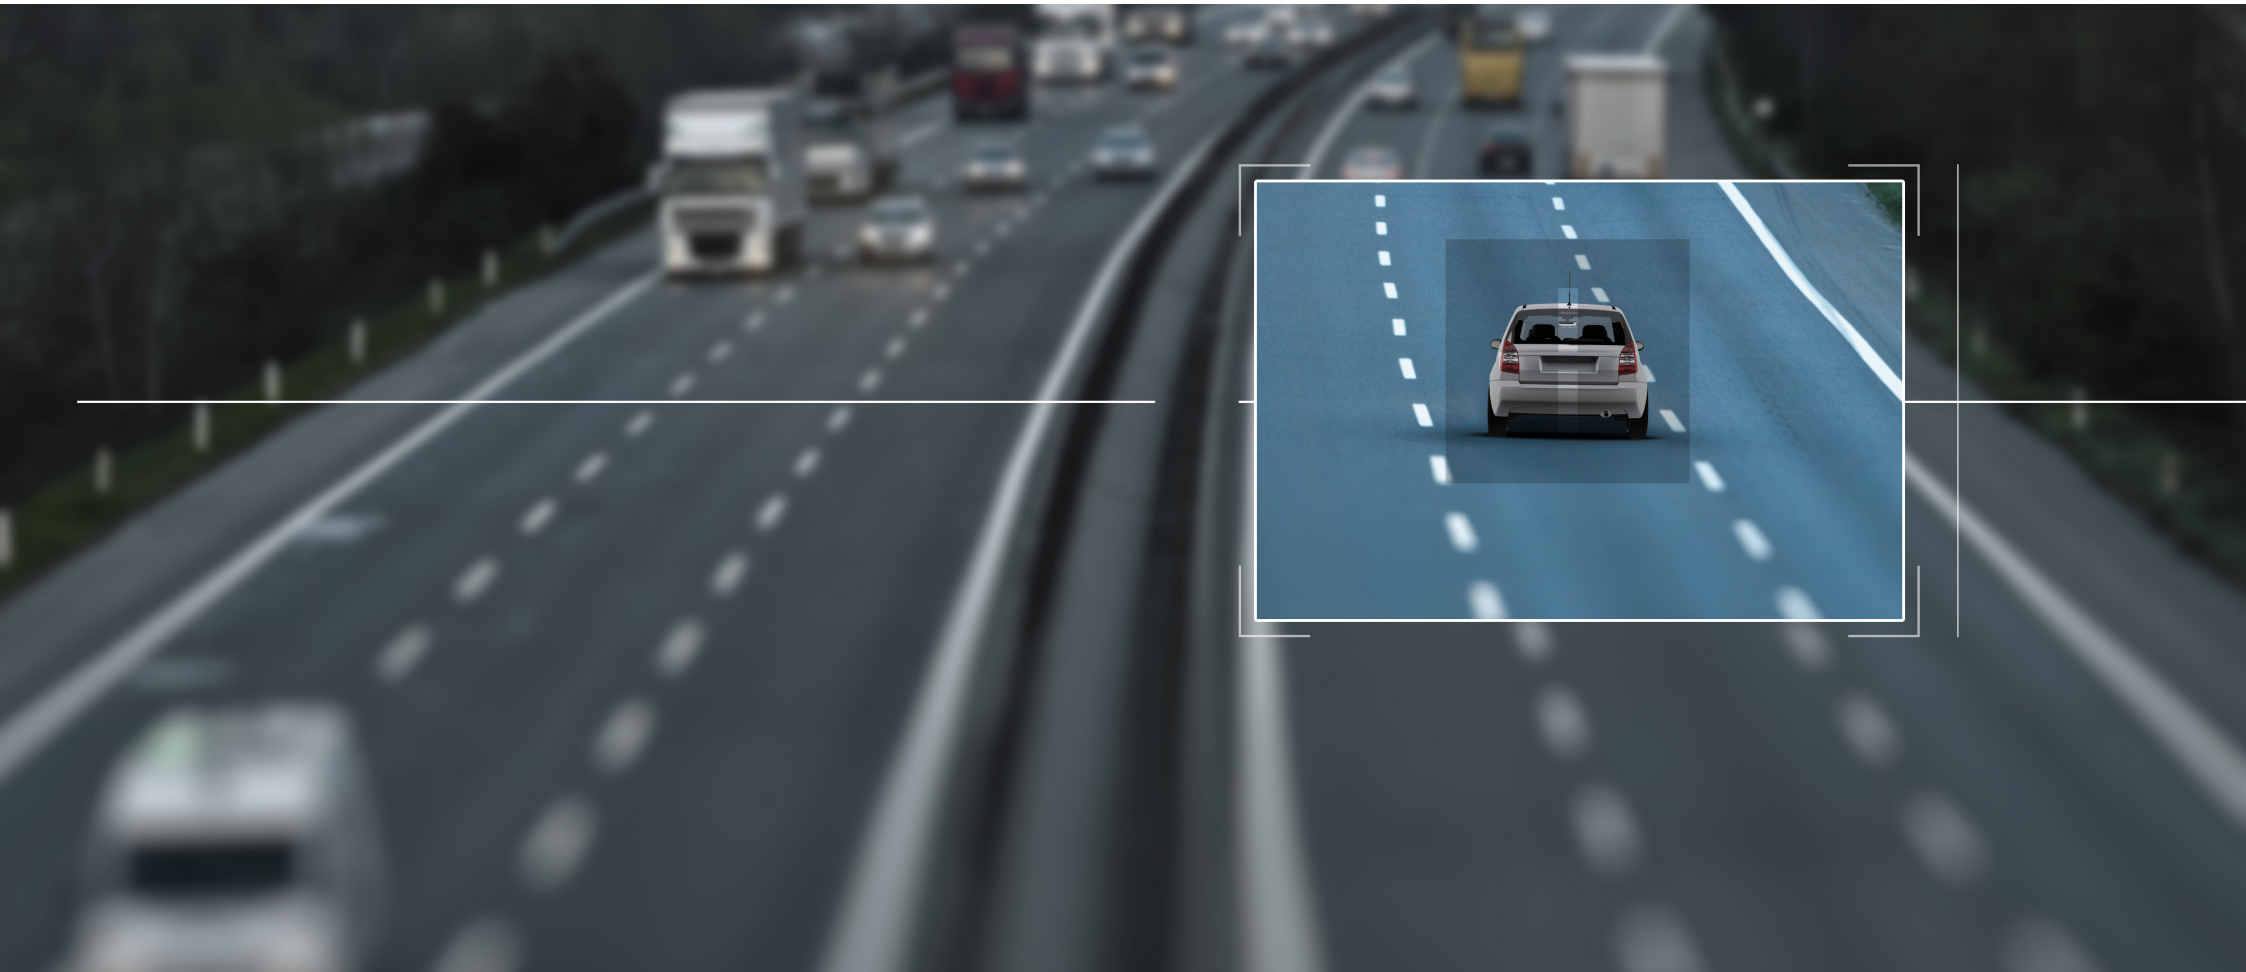

H.265+ TECHNOLOGY

The H.265+ smart codec algorithm is an intelligent proprietary algorithm developed by Hikvision. It can vastly decrease the bitrate of video – while retaining the quality – of the standard H.265 codec. H.265+ does this via three core technologies: predictive encoding, noise suppression and bitrate control. This smart codec drastically reduces bandwidth and data storage while rendering amazing video quality.

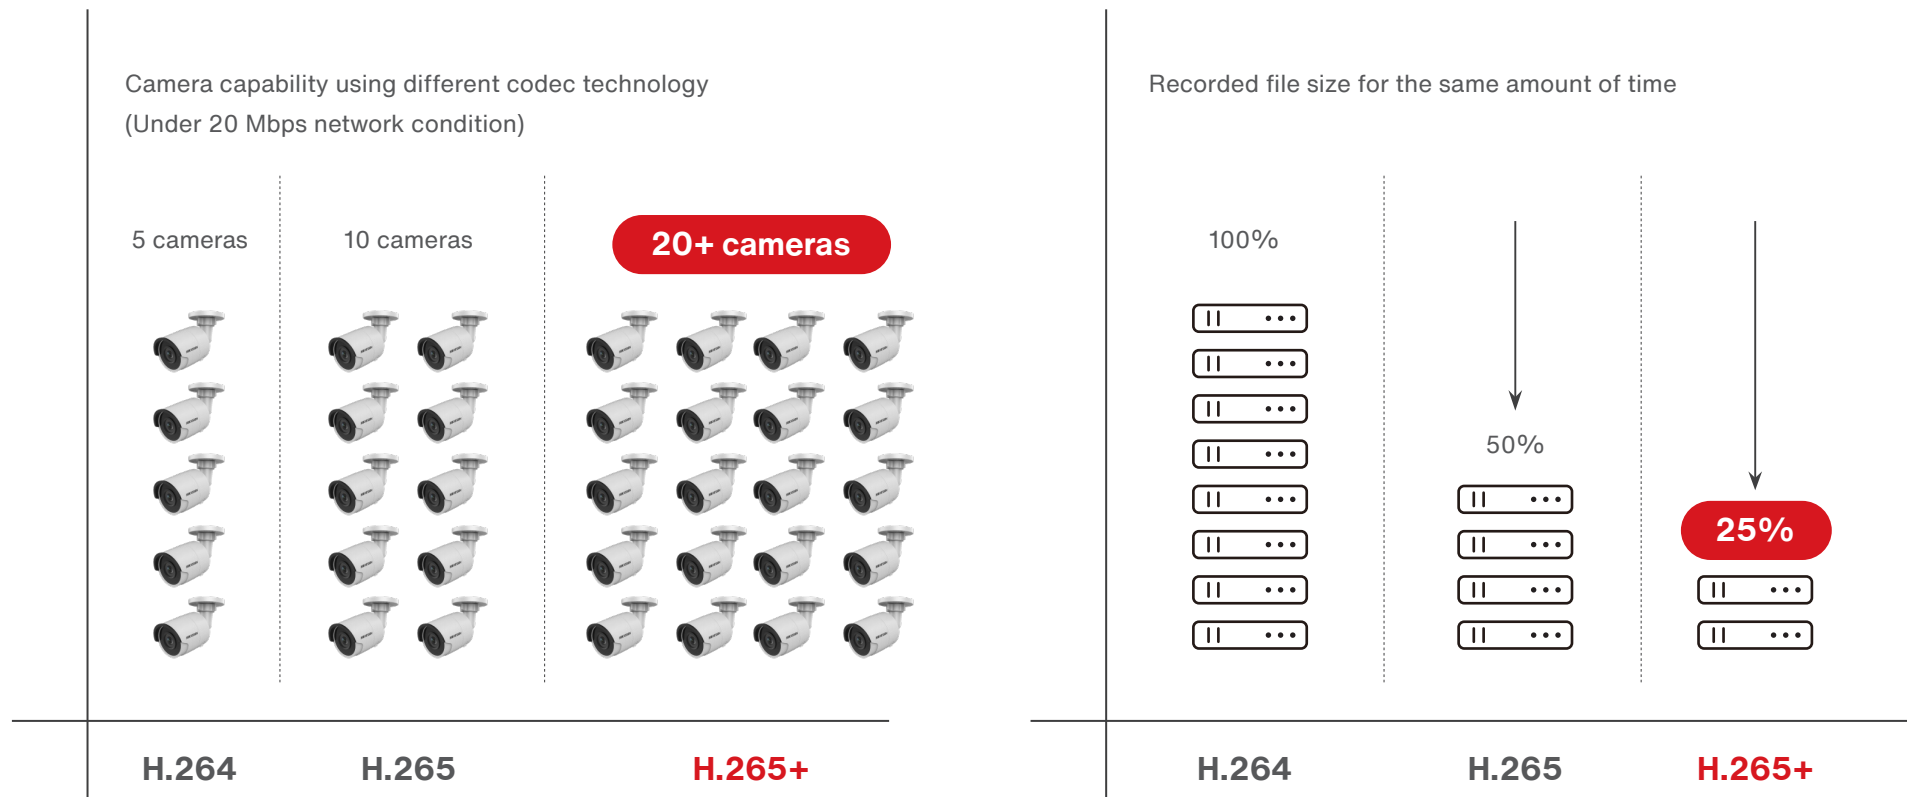


Note: this test result is for reference only.

Reset Password via Hik-Connect


To help users with easier password retrieval without needing to consult aftersales, Hikvision offers the new password reset function which is easy and safe. With this function, users can reset password for DVR or NVR via Hik-Connect in only about 1 minute.

3 steps, within 1 minute

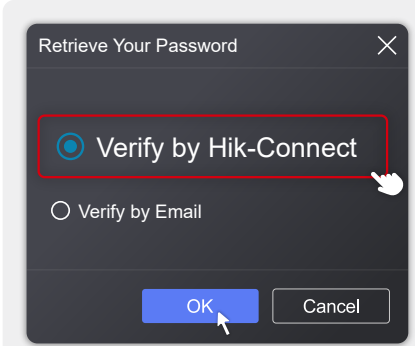


Select "Verify by Hik-Connect" on the device.

01

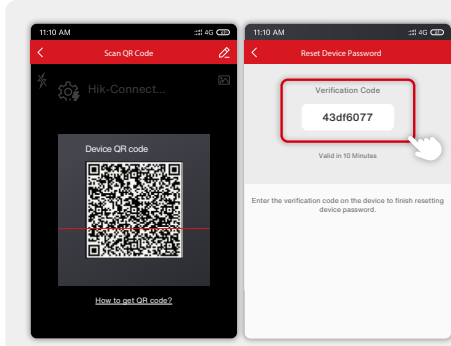

Scan QR code via the Hik-Connect App to get a verification code.

02

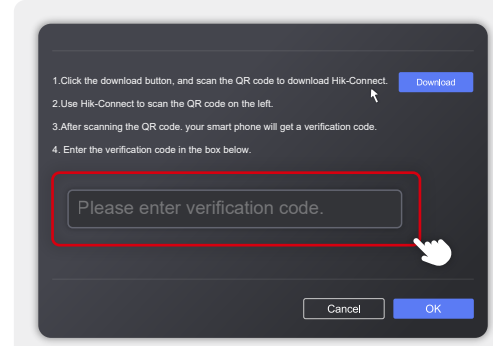

Key in the verification code to reset password.

03

Double assurance for better security



Registered account

This function is available for registered Hik-Connect account, not with visitor mode.



Authority control

The Hik-Connect account need to be linked with the device. Other unlinked accounts don't have the permission to reset password.

Tips

It is highly suggested that you link your device to the Hik-Connect account upon device activation as password reset can only be performed with a linked account.

Brand-new User Interface – "E-UI"

What is E-UI?


The E-UI is an easy and efficient user interface for Hikvision NVRs.

"**Easy**" means that users can easily find what they are looking for;

"**Efficient**" means that users can finish their settings quickly and effectively.

What are the features of E-UI?


Efficient to connect: Customers need to complete just a few initial settings on the NVR to begin. The NVR will then automatically activate and add inactive cameras within the same network segment.

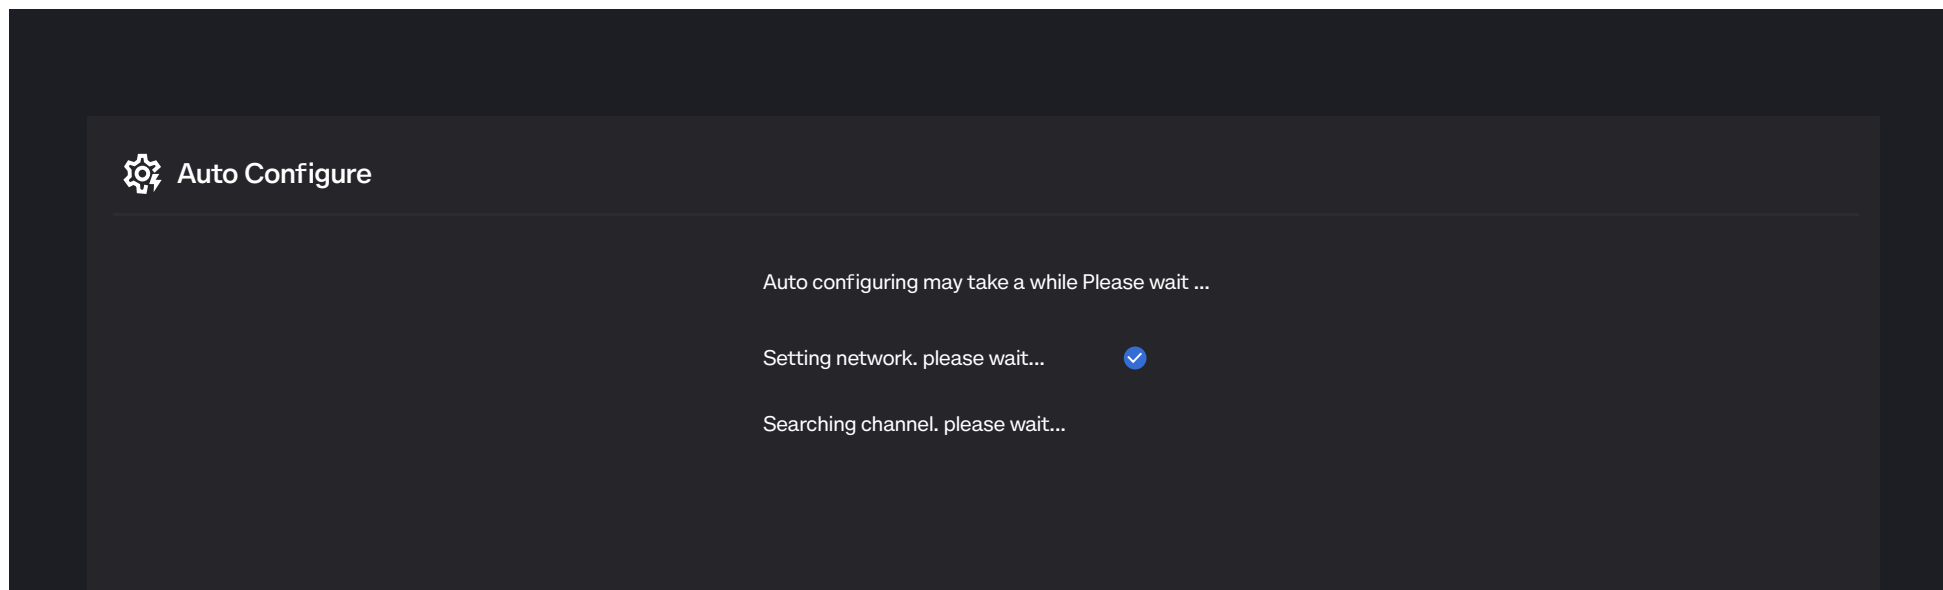

*This function only works with non-PoE series NVRs.

Easy to configure:

There are 4 buttons on the top menu for quick access. The E-UI offers two configuration mode options to cater to a variety of user habits.

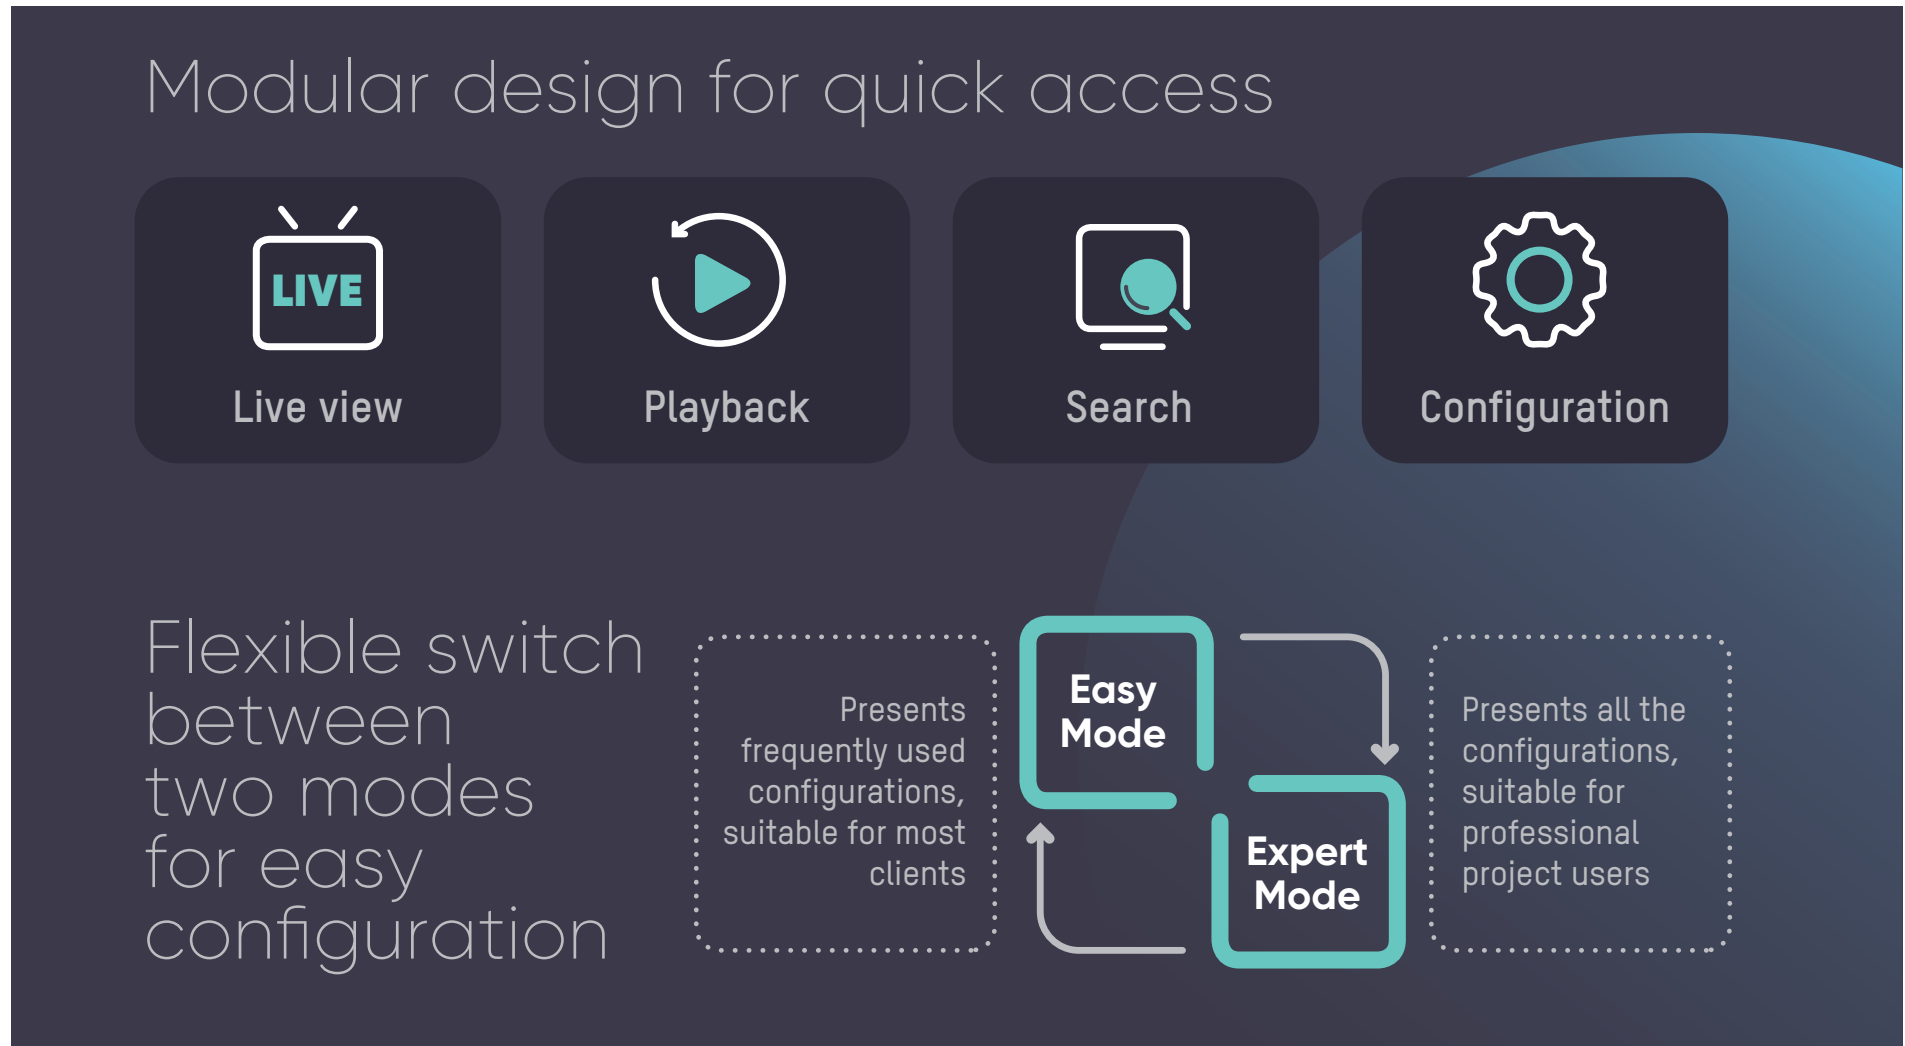

* Supported by 71Q/76Q/77Q/76K/77K series (V 4.30.055)

Turbo HD History

The Turbo HD line transforms analog CCTV video into high quality, high definition monitoring. Each iteration of the Turbo HD product portfolio advances the technology to the next amazing level.


Throughout Turbo's history, Hikvision has continually advanced what every video security system installer and user cares about most: clear and accurate video recording. With the new Turbo HD X system, a further step was taken to help users achieve real-time response.



Turbo HD X

The Turbo HD line transforms analog CCTV video into high quality, high definition monitoring. Each iteration of the Turbo HD product portfolio advances the technology to the next amazing level.

Throughout Turbo's history, Hikvision has continually advanced what every video security system installer and user cares about most: clear and accurate video recording. With the new Turbo HD X system, a further step was taken to help users achieve real-time response.

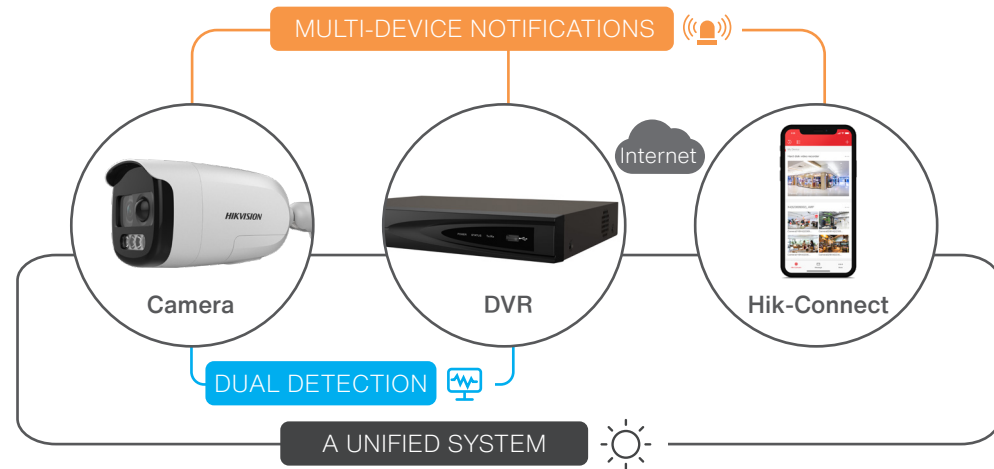

How does it work? Here is an example.


22:34

10: 34 at night, someone broke into the largest supermarket in town- **the Joe's.**



At the entrance

The siren went off and the blue and red light started to flash. The thief quickly ran off.



In the monitoring room

An alarm notification popped up. The security on duty immediately noticed and sent someone to check.





On the mobile app

The store manager got a message on his phone, he then called the security team to make sure everything is properly handled.

H.265 Pro+

The H.265 Pro video compression optimizes H.265 through advanced algorithms. H.265 Pro can intelligently adjust video bitrates according to given scenarios, significantly compressing the video file while maintaining high image quality.

Furthermore, when combining H.265 Pro with Hikvision's unique "H.265+", the newly generated "H.265 Pro+" works even better. Compared with H.265, H.265 Pro reduces video file size by 50% on average while H.265 Pro+ reduces video file size by up to 75% – and at times even more.

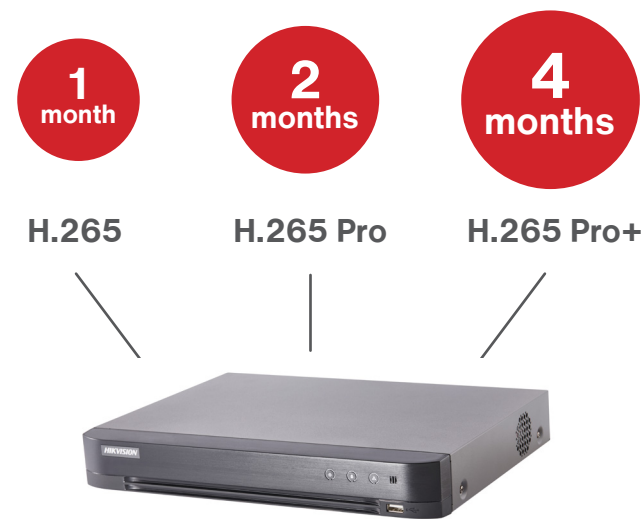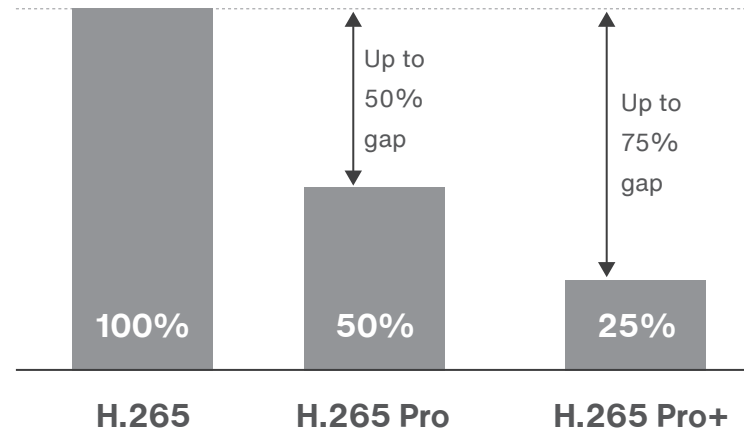

Storage time is four times longer under the same storage capability


PIR Solution for Perimeter Protection

PIR (passive infrared) camera has a built-in PIR detector and flashlight. The PIR detector reacts to human body's IR emission and is able to control the on and off of flashlight according to PIR detector. The camera will immediately flashes bright strobe light to warn trespassers, and hopefully drive them away from the perimeter.



Coaxial Audio Solution


Coaxial audio makes transmission of both HD video and sound possible over a coaxial cable, which means audio accessories like pick-ups and audio adaptors – especially audio cabling – can be removed. Enjoy a compact and efficient video & audio system with Hikvision's coaxial audio solution.

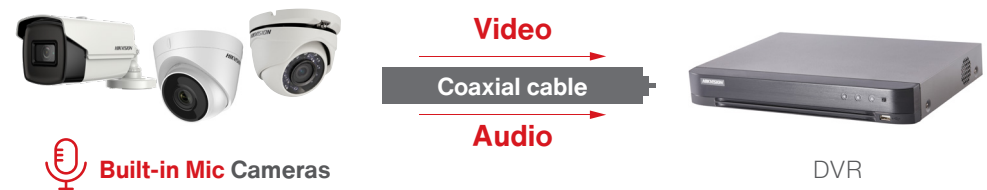

4-in-1 & 5-in-1


4-in-1 means the camera is able to deliver HD-TVI, AHD, CVI and CVBS signals. Users can choose suitable signal accordingly.

5-in-1 means the DVR is not only able to access HD-TVI, AHD, CVI and CVBS signals, but also able to access IP cameras.



PoC 2.0

PoC 2.0 (Power Over Coax)

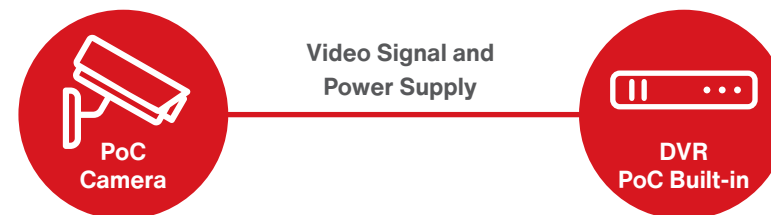

- > Transmits both HD video and power over the same coax cable
- > Unique built-in design
- > Patented Hikvision technology

Turbo HD Cameras

002 Hikvision ColorVu Series

009 Ultra Series

012 Pro Series

022 Value Series

043 Special Series



Turbo HD Cameras








Hikvision ColorVu Series







Hikvision ColorVu cameras render colorful imaging, 24/7. These cameras can provide colorful video in ultra-low-light scenarios even without any supplemental lighting.







In zero-light environments, automatic supplemental lighting from the camera itself will enhance imaging. Highlights of these cameras include:






- > 24/7 colorful imaging
- > Ultra-low-light night vision
- > 130 dB True WDR
- > 4-in-1 video output
- > Audio over coaxial
- > New camera appearance and package design (Moonlit silver / Starry gold / Polar glow)








| Model | DS-2CE10DFT-F | DS-2CE72DFT-F | DS-2CE12DFT-F | DS-2CE10DFT-PF28(2.8mm) | DS-2CE10DFT-PF | DS-2CE10DFT-F28(2.8mm) | DS-2CE72DFT-F28(2.8mm) |
|--------------------------|--|--|---|--|---|--|--|
| Image |  ColorVu |  ColorVu |  ColorVu |  ColorVu |  ColorVu |  ColorVu |  ColorVu |
| Description | 2 MP Full Time Color Bullet Camera | 2 MP Full Time Color Turret Camera | 2 MP Full Time Color Bullet Camera | 2 MP Full Time Color Bullet Camera | 2 MP Full Time Color Bullet Camera | 2 MP Full Time Color Bullet Camera | 2 MP Full Time Color Turret Camera |
| Lens | 3.6 mm fixed focal lens | 3.6 mm fixed focal lens | 3.6 mm fixed focal lens | 2.8 mm fixed lens | 3.6 mm fixed focal lens | 2.8 mm fixed lens | 2.8 mm fixed lens |
| Min. Illumination | Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with white light | Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with white light | Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with white light | Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with white light | Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with white light | Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with white light | Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with white light |
| FOV | Horizontal Field of View 83.6° (3.6 mm), 52.8° (6 mm) | Horizontal Field of View 83.6° (3.6 mm), 52.8° (6 mm) | Horizontal Field of View 83.6° (3.6 mm), 52.8° (6 mm) | 2.8 mm, horizontal FOV: 104°, vertical FOV: 54°, diagonal FOV: 126° | 3.6 mm, horizontal FOV: 83.0°, vertical FOV: 44.4°, diagonal FOV: 98.0° 6 mm, horizontal FOV: 51.0°, vertical FOV: 28.5°, diagonal FOV: 58.7 | 2.8 mm, horizontal FOV: 104°, vertical FOV: 54°, diagonal FOV: 126° | 2.8 mm, horizontal FOV: 104°, vertical FOV: 54°, diagonal FOV: 126° |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° |
| Day & Night | Color | Color | Color | Color | Color | Color | Color |
| WDR | WDR | WDR | WDR | WDR | WDR | WDR | WDR |
| Max. IR Range | Up to 20 m white light distance | Up to 20 m white light distance | Up to 40 m white light distance | Up to 20 m white light distance | Up to 20 m white light distance | Up to 20 m white light distance | Up to 20 m white light distance |
| HD Video Output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS |
| CVBS Output | - | - | - | - | - | - | - |
| White Balance | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual |
| BLC | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | - | - | Yes | Yes |
| 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR |
| Functions | Brightness, Sharpness, Mirror, Smart Light | Brightness, Sharpness, Mirror, Smart Light | Brightness, Sharpness, Mirror, Smart Light | Brightness, Sharpness, Mirror, Smart Light, Defective Pixel Correction | Brightness, Sharpness, Mirror, Smart Light, Defective Pixel Correction | Brightness, Sharpness, 3D DNR, Mirror, Smart light | Brightness, Sharpness, 3D DNR, Mirror, Smart light |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 | IP67 | IP67 |
| Alarm I/O | - | - | - | - | - | - | - |
| Power | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% |

| Model | DS-2CE10DF8T-PF | DS-2CE10DF8T-F | DS-2CE12DF8T-F | DS-2CE70DF8T-PF | DS-2CE70DF8T-MF | DS-2CE72DF8T-F |
|-------------------|---|---|--|---|---|---|
| Image |  ColorVu |  ColorVu |  ColorVu |  ColorVu |  ColorVu |  ColorVu |
| Description | 2 MP Full Time Color Bullet Camera | 2 MP Full Time Color Bullet Camera | 2 MP Full Time Color Bullet Camera | 2 MP Full Time Color Turret Camera | 2 MP Full Time Color Turret Camera | 2 MP Full Time Color Turret Camera |
| Lens | 2.8 mm, 3.6mmfixed lens | 2.8 mm, 3.6mmfixed lens | 2.8 mm, 3.6mm fixed lens | 2.8 mm, 3.6mmfixed lens | 2.8 mm, 3.6mmfixed lens | 2.8 mm, 3.6mmfixed lens |
| Min. Illumination | 0.0003 Lux @ (F1.0, AGC ON), 0 Lux with white light | 0.0003 Lux @ (F1.0, AGC ON), 0 Lux with white light | 0.0003 Lux @ (F1.0, AGC ON), 0 Lux with white light | 0.0003 Lux @ (F1.0, AGC ON), 0 Lux with white light | 0.0003 Lux @ (F1.0, AGC ON), 0 Lux with white light | 0.0003 Lux @ (F1.0, AGC ON), 0 Lux with white light |
| FOV | 2.8 mm, horizontal FOV: 106°, vertical FOV: 56°, diagonal FOV: 129° 3.6 mm, horizontal FOV: 83°, vertical FOV: 44°, diagonal FOV: 100° | 2.8 mm, horizontal FOV: 106°, vertical FOV: 56°, diagonal FOV: 129° 3.6 mm, horizontal FOV: 83°, vertical FOV: 44°, diagonal FOV: 100° | 2.8 mm, horizontal FOV: 106°, vertical FOV: 56°, diagonal FOV: 129° 3.6 mm, horizontal FOV: 83°, vertical FOV: 44°, diagonal FOV: 100° 6 mm, horizontal FOV: 54°, vertical FOV: 30°, diagonal FOV: 64° | 2.8 mm, horizontal FOV: 106°, vertical FOV: 56°, diagonal FOV: 129° 3.6 mm, horizontal FOV: 83°, vertical FOV: 44°, diagonal FOV: 100° | 2.8 mm, horizontal FOV: 106°, vertical FOV: 56°, diagonal FOV: 129° 3.6 mm, horizontal FOV: 83°, vertical FOV: 44°, diagonal FOV: 100° | 2.8 mm, horizontal FOV: 106°, vertical FOV: 56°, diagonal FOV: 129° 3.6 mm, horizontal FOV: 83°, vertical FOV: 44°, diagonal FOV: 100° |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° |
| Day & Night | Color | Color | Color | Color | Color | Color |
| WDR | WDR | WDR | WDR | WDR | WDR | WDR |
| Max. IR Range | Up to 20 m white light distance | Up to 20 m white light distance | Up to 40 m white light distance | Up to 20 m white light distance | Up to 20 m white light distance | Up to 40 m white light distance |
| HD Video Output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS |
| CVBS Output | - | - | - | - | - | - |
| White Balance | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual |
| BLC | WDR/BLC/HLS/OFF | WDR/BLC/HLS/OFF | WDR/BLC/HLS/OFF | WDR/BLC/HLS/OFF | WDR/BLC/HLS/OFF | WDR/BLC/HLS/OFF |
| 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR |
| Functions | Brightness, Sharpness, Mirror, Smart Light, Anti-Banding, Contrast | Brightness, Sharpness, Mirror, Smart Light, Anti-Banding, Contrast | Brightness, Sharpness, Mirror, Smart Light, Anti-Banding, Contrast | Brightness, Sharpness, Mirror, Smart Light, Anti-Banding, Contrast | Brightness, Sharpness, Mirror, Smart Light, Anti-Banding, Contrast | Brightness, Sharpness, Mirror, Smart Light, Anti-Banding, Contrast |
| Protection Level | IP68 | IP68 | IP68 | - | IP68 | IP68 |
| Alarm I/O | - | - | - | - | - | - |
| Power | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% |

| Model | DS-2CE10DF8T-PFSLN | DS-2CE10DF8T-FSLN | DS-2CE12DF8T-FSLN | DS-2CE70DF8T-PFSLN | DS-2CE70DF8T-MFSLN | DS-2CE72DF8T-FSLN |
|-------------------|--|--|--|--|--|--|
| Image |  ColorVu |  ColorVu |  ColorVu |  ColorVu |  ColorVu |  ColorVu |
| Description | 2 MP Full Time Color Bullet Camera | 2 MP Full Time Color Bullet Camera | 2 MP Full Time Color Bullet Camera | 2 MP Full Time Color Turret Camera | 2 MP Full Time Color Turret Camera | 2 MP Full Time Color Turret Camera |
| Lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens |
| Min. Illumination | 0.0003 Lux @ (F1.0, AGC ON), 0 Lux with white light | 0.0003 Lux @ (F1.0, AGC ON), 0 Lux with white light | 0.0003 Lux @ (F1.0, AGC ON), 0 Lux with white light | 0.0003 Lux @ (F1.0, AGC ON), 0 Lux with white light | 0.0003 Lux @ (F1.0, AGC ON), 0 Lux with white light | 0.0003 Lux @ (F1.0, AGC ON), 0 Lux with white light |
| FOV | 2.8 mm, horizontal FOV: 106°, vertical FOV: 56°, diagonal FOV: 129° 3.6 mm, horizontal FOV: 83°, vertical FOV: 44°, diagonal FOV: 100° | 2.8 mm, horizontal FOV: 106°, vertical FOV: 56°, diagonal FOV: 129° 3.6 mm, horizontal FOV: 83°, vertical FOV: 44°, diagonal FOV: 100° | 2.8 mm, horizontal FOV: 106°, vertical FOV: 56°, diagonal FOV: 129° 3.6 mm, horizontal FOV: 83°, vertical FOV: 44°, diagonal FOV: 100° 6 mm, horizontal FOV: 54°, vertical FOV: 30°, diagonal FOV: 64° | 2.8 mm, horizontal FOV: 106°, vertical FOV: 56°, diagonal FOV: 129° 3.6 mm, horizontal FOV: 83°, vertical FOV: 44°, diagonal FOV: 100° | 2.8 mm, horizontal FOV: 106°, vertical FOV: 56°, diagonal FOV: 129° 3.6 mm, horizontal FOV: 83°, vertical FOV: 44°, diagonal FOV: 100° | 2.8 mm, horizontal FOV: 106°, vertical FOV: 56°, diagonal FOV: 129° 3.6 mm, horizontal FOV: 83°, vertical FOV: 44°, diagonal FOV: 100° |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotation: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360° |
| Day & Night | Color | Color | Color | Color | Color | Color |
| WDR | WDR | WDR | WDR | WDR | WDR | WDR |
| Max. IR Range | Up to 20 m | Up to 20 m | Up to 40 m | Up to 20 m | Up to 20 m | Up to 40 m |
| HD Video Output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS |
| CVBS Output | - | - | - | - | - | - |
| White Balance | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual |
| BLC | WDR;BLC;HLC;Global;HLS | WDR;BLC;HLC;Global;HLS | WDR;BLC;HLC;Global;HLS | WDR;BLC;HLC;Global;HLS | WDR;BLC;HLC;Global;HLS | WDR;BLC;HLC;Global;HLS |
| 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR |
| Functions | Brightness, Contrast, Mirror, Defective Pixel Correction, Sharpness, Anti-Banding, Smart Light | Brightness, Contrast, Mirror, Defective Pixel Correction, Sharpness, Anti-Banding, Smart Light | Brightness, Contrast, Mirror, Defective Pixel Correction, Sharpness, Anti-Banding, Smart Light | Brightness, Contrast, Mirror, Defective Pixel Correction, Sharpness, Anti-Banding, Smart Light | Brightness, Contrast, Mirror, Defective Pixel Correction, Sharpness, Anti-Banding, Smart Light | Brightness, Contrast, Mirror, Defective Pixel Correction, Sharpness, Anti-Banding, Smart Light |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 | IP67 |
| Alarm I/O | - | - | - | - | - | - |
| Power | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% |

| Model | DS-2CE19DF8T-AZE | DS-2CE79DF8T-AZE | DS-2CE59DF8T-AVPZE | DS-2CE10HFT-F28 (2.8mm) | DS-2CE72HFT-F28 (2.8mm) |
|-------------------|--|--|--|--|--|
| Image |  ColorVu |  ColorVu |  ColorVu |  ColorVu |  ColorVu |
| Description | 2 MP Full Time Color Bullet Camera | 2 MP Full Time Color Turret Camera | 2 MP Full Time Color Turret Camera | 5 MP Full Time Color Bullet Camera | 5 MP Full Time Color Turret Camera |
| Lens | 2.8 mm to 12 mm motorized, auto focus | 2.8 mm to 12 mm motorized, auto focus | 2.8 mm to 12 mm motorized, auto focus | 2.8 mm fixed lens | 2.8 mm fixed lens |
| Min. Illumination | 0.0003 Lux @ (F1.0, AGC ON), 0 Lux with white Light | 0.0003 Lux @ (F1.0, AGC ON), 0 Lux with white Light | 0.0003 Lux @ (F1.0, AGC ON), 0 Lux with white Light | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with White Light | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with White Light |
| FOV | horizontal FOV: 92.3° to 34.2°, vertical FOV: 48.4° to 19°, diagonal FOV: 112.2° to 39.2° | horizontal FOV: 92.3° to 34.2°, vertical FOV: 48.4° to 19°, diagonal FOV: 112.2° to 39.2° | horizontal FOV: 92.3° to 34.2°, vertical FOV: 48.4° to 19°, diagonal FOV: 112.2° to 39.2° | 2.8 mm, horizontal FOV: 99.7°, verticalFOV: 72°, diagonal FOV: 139.8° | 2.8 mm, horizontal FOV: 99.7°, verticalFOV: 72°, diagonal FOV: 139.8° |
| Angle Adjustment | Pan:0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360° | Pan:0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360° | Pan:0° to 355°, Tilt: 0° to 75°, Rotation: 0° to 355° | Pan: 0 to 360°, Tilt: 0 to 90°, Zoom 0 to 360° | Pan: 0 to 360°, Tilt: 0 to 75°, Zoom 0 to 360° |
| Day & Night | Color | Color | Color | Color | Color |
| WDR | WDR | WDR | WDR | WDR | WDR |
| Max. IR Range | Up to 40 m | Up to 40 m | Up to 40 m | Up to 20 m | Up to 20 m |
| HD Video Output | 1 HD analog output | 1 HD analog output | 1 HD analog output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS |
| CVBS Output | - | - | - | - | - |
| White Balance | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual |
| BLC | WDR, BLC, HLC, Global, HLS | WDR, BLC, HLC, Global, HLS | WDR, BLC, HLC, Global, HLS | - | - |
| 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR |
| Functions | Brightness, Contrast, Mirror, Defective Pixel Correction, Sharpness, Anti-Banding, Smart Light | Brightness, Contrast, Mirror, Defective Pixel Correction, Sharpness, Anti-Banding, Smart Light | Brightness, Contrast, Mirror, Defective Pixel Correction, Sharpness, Anti-Banding, Smart Light | Brightness, Sharpness, Mirror, Smart Light | Brightness, Sharpness, Mirror, Smart Light |
| Protection Level | IP68 | IP68 | IK10 ; IP68 | IP67 | IP67 |
| Alarm I/O | - | - | - | - | - |
| Power | 12 VDC/24 VAC±20%/PoC.at | 12 VDC/24 VAC±20%/PoC.at | 12 VDC/24 VAC±20%/PoC.at | 12 VDC ±25% | 12 VDC ±25% |

| Model | DS-2CE12HFT-F28 (2.8mm) | DS-2CE12HFT-F | DS-2CE10HFT-E | DS-2CE72HFT-E | DS-2CE12HFT-E |
|-------------------|--|--|--|--|--|
| Image |  HOT ColorVu |  HOT ColorVu |  NEW ColorVu |  NEW ColorVu |  NEW ColorVu |
| Description | 5 MP Full Time Color Bullet Camera | 5 MP Full Time Color Bullet Camera | 5 MP Full Time Color Bullet Camera | 5 MP Full Time Color Turret Camera | 5 MP Full Time Color Bullet Camera |
| Lens | 2.8 mm fixed lens | 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens |
| Min. Illumination | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with White Light | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with White Light | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with White Light | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with White Light | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with White Light |
| FOV | 2.8 mm, horizontal FOV: 99.7°, vertical FOV: 72°, diagonal FOV: 139.8° | 80.1° (3.6 mm), 49.3° (6 mm) | 2.8 mm, horizontal FOV: 99.7°, vertical FOV: 72°, diagonal FOV: 139.8° 3.6 mm, horizontal FOV: 80.1°, vertical FOV: 58.6°, diagonal FOV: 106.2° | 2.8 mm, horizontal FOV: 99.7°, vertical FOV: 72°, diagonal FOV: 139.8° 3.6 mm, horizontal FOV: 80.1°, vertical FOV: 58.6°, diagonal FOV: 106.2° | 2.8 mm, horizontal FOV: 99.7°, vertical FOV: 72°, diagonal FOV: 139.8° 3.6 mm, horizontal FOV: 80.1°, vertical FOV: 58.6°, diagonal FOV: 106.2° |
| Angle Adjustment | Pan: 0 to 360°, Tilt: 0 to 90°, Zoom 0 to 360° | Pan: 0 to 360°, Tilt: 0 to 90°, Zoom 0 to 360° | Pan: 0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360° |
| Day & Night | Color | Color | Color | Color | Color |
| WDR | WDR | WDR | WDR | WDR | WDR |
| Max. IR Range | Up to 40 m | Up to 40 m | Up to 20 m | Up to 40 m | Up to 40 m |
| HD Video Output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | 1 HD analog output | 1 HD analog output | 1 HD analog output |
| CVBS Output | - | - | - | - | - |
| White Balance | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual |
| BLC | - | - | BLC | BLC | BLC |
| 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR |
| Functions | Brightness, Sharpness, Mirror, Smart Light | Brightness, Sharpness, Mirror, Smart Light | Brightness, Mirror, Sharpness, Anti-Banding, Smart Light | Brightness, Mirror, Sharpness, Anti-Banding, Smart Light | Brightness, Mirror, Sharpness, Anti-Banding, Smart Light |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 |
| Alarm I/O | - | - | - | - | - |
| Power | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25%/PoC.af | 12 VDC ±25%/PoC.af | 12 VDC ±25%/PoC.af |



Turbo HD Cameras

Ultra Series

Ultra Series Cameras capture ultra high quality and high definition videos. With ultra HD and ultra-low-light abilities, cameras perform even in scenarios with dim light. And with 120 dB true WDR, environments with strong backlight won't be any headaches. High performance, simple installation, and easy operation come together for an excellent user experience.

- > Ultra HD
- > Ultra-low-light night vision
- > 120 dB True WDR
- > PoC easy installation
- > EXIR 2.0
- > Dual output



| Model | DS-2CC12D9T-IT3E | DS-2CC12D9T-IT5E | DS-2CC52D9T-IT3E | DS-2CC12D9T-AIT3ZE | DS-2CC52D9T-AITZE | DS-2CC52D9T-AVPIT3ZE |
|-------------------|---|---|---|---|---|---|
| Image |  Ultra-Low Light & PoC |  Ultra-Low Light & PoC |  Ultra-Low Light & PoC |  Ultra-Low Light & PoC |  Ultra-Low Light & PoC |  Ultra-Low Light & PoC |
| Description | 2 MP Ultra Low Light PoC Bullet Camera | 2 MP Ultra Low Light PoC Bullet Camera | 2 MP Ultra Low Light PoC Turret Camera | 2 MP Ultra Low Light PoC Bullet Camera | 2 MP Ultra Low Light PoC Dome Camera | 2 MP Ultra Low Light PoC Dome Camera |
| Lens | 2.8 mm, 3.6 mm, 6 mm optional | 2.8 mm, 3.6 mm, 6 mm optional | 2.8 mm, 3.6 mm optional | 2.8 mm to 12 mm Auto Focus, Auto Iris | 2.8 mm to 12 mm Auto Focus, Auto Iris | 2.8 mm to 12 mm Auto Focus, Auto Iris |
| Min. Illumination | 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm) | 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm) | 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm) | 32.1° to 98° | 32.1° to 98° | 32.1° to 98° |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360° | Pan: 0° to 340°, Tilt: 0° to 75°, Rotate: 0° to 355° | Pan: 0° to 355°, Tilt: 0° to 75°, Rotate: 0° to 355° |
| Day & Night | ICR | ICR | ICR | ICR | ICR | ICR |
| WDR | WDR | WDR | WDR | WDR | WDR | WDR |
| Max. IR Range | Up to 40 m | Up to 80 m | Up to 40 m | Up to 40 m | Up to 40 m | Up to 40 m |
| HD Video Output | 1 Analog HD output | 1 Analog HD output | 1 Analog HD output | 1 Analog HD output | 1 Analog HD output | 1 Analog HD output |
| CVBS Output | 1Vp-p Composite Output (75Ω / BNC) | 1Vp-p Composite Output (75Ω / BNC) | 1Vp-p Composite Output (75Ω / BNC) | 1Vp-p Composite Output (75Ω / BNC) | 1Vp-p Composite Output (75Ω / BNC) | 1Vp-p Composite Output (75Ω / BNC) |
| D/N Mode | Auto / Color / BW (White & Black) | Auto / Color / BW (White & Black) | Auto / Color / BW (White & Black) | Auto / Color / BW (White & Black) | Auto / Color / BW (White & Black) | Auto / Color / BW (White & Black) |
| White Balance | ATW/ AWC-SET / Manual | ATW/ AWC-SET / Manual | ATW/ AWC-SET / Manual | ATW/ AWC-SET / Manual | ATW/ AWC-SET / Manual | ATW/ AWC-SET / Manual |
| BLC | WDR / BLC / HLC / OFF | WDR / BLC / HLC / OFF | WDR / BLC / HLC / OFF | WDR / BLC / HLC / OFF | WDR / BLC / HLC / OFF | WDR / BLC / HLC / OFF |
| 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR |
| Functions | Defog, Mirror, Defective Pixel Correction, Sharpness, Camera Title | Defog, Mirror, Defective Pixel Correction, Sharpness, Camera Title | Defog, Mirror, Defective Pixel Correction, Sharpness, Camera Title | Defog, Mirror, Defective Pixel Correction, Sharpness, Camera Title | Defog, Mirror, Defective Pixel Correction, Sharpness, Camera Title | Defog, Mirror, Defective Pixel Correction, Sharpness, Camera Title |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 | IP67,IK10 |
| Alarm I/O | - | - | - | 1 Alarm Input; 1 Alarm Output | 1 Alarm Input; 1 Alarm Output | 1 Alarm Input; 1 Alarm Output |
| Power | 12 VDC ± 30%/PoC | 12 VDC ± 30%/PoC | 12 VDC ± 30%/PoC | 24 VAC /12 VDC ± 30% / PoC | 24 VAC /12 VDC ± 30% / PoC | 24 VAC / 12 VDC ± 30% / PoC |

| Model | DS-2CE16D9T-AIRAZH | DS-2CC12D9T-(A) | DS-2CC12D9T-E |
|-------------------|---|---|---|
| Image |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light & PoC |
| Description | 2 MP WDR Motorized VF EXIR Bullet Camera | 2 MP WDR Box Camera | 2 MP WDR PoC Box Camera |
| Lens | 5-50mm Auto Focus, Auto Iris | C/CS | C/CS |
| Min. Illumination | 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | Angle of view: 59.8°-6.2° | - | - |
| Angle Adjustment | Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360° | - | - |
| Day & Night | ICR | ICR | ICR |
| WDR | WDR | WDR | WDR |
| Max. IR Range | Up to 110 m | - | - |
| HD Video Output | 1 Analog HD output | 1 Analog HD output | 1 Analog HD output |
| CVBS Output | 1Vp-p Composite Output (75Ω / BNC) | 1Vp-p Composite Output (75Ω / BNC) | 1Vp-p Composite Output (75Ω / BNC) |
| D/N Mode | Auto / Color / BW (White & Black) | Auto / Color / BW (White & Black) | Auto / Color / BW (White & Black) |
| White Balance | ATW / AWC-SET / Manual | ATW, AWC-SET, Manual | ATW, AWC-SET, Indoor, Outdoor, Manual |
| BLC | WDR / BLC / HLC / OFF | WDR / BLC / HLC / OFF | WDR / BLC / HLC / OFFv |
| 3D DNR | 3D DNR | 3D DNR | 3D DNR |
| Functions | HSBLC, Digital Noise Reduction, Digital zoom (62x), Slow Shutter, Mirror, Defog, Defective Pixel Correction, SMART D-ZOOM | HSBLC, Digital Noise Reduction, Digital zoom (62x), Slow Shutter, Mirror, Defog, Defective Pixel Correction, SMART D-ZOOM | HSBLC, Digital Noise Reduction, Digital zoom (62x), Slow Shutter, Mirror, Defog, Defective Pixel Correction, SMART D-ZOOM |
| Protection Level | IP66 | - | - |
| Alarm I/O | - | -A model: 1 Alarm Input; 1 Alarm Output | 1 Alarm Input; 1 Alarm Output |
| Power | AC24V±15% / DC12V±15%, Heater is available with 24 VAC only | 12 VDC ± 15%, -A model: 24V ± 15% AC, 12V ± 15% DC | 12 VDC ± 15%, POC |

| Model | DS-2CE17U8T-IT | DS-2CE18U8T-IT3 |
|-------------------|---|---|
| Image |  Ultra-Low Light |  Ultra-Low Light |
| Description | 8 MP Ultra-Low Light Bullet Camera | 8 MP Ultra-Low Light Bullet Camera |
| Lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm, 6 mm fixed focal lens |
| Min. Illumination | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | 102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm) | 102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm) |
| Angle Adjustment | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° |
| Day & Night | IR cut filter | IR cut filter |
| WDR | WDR | WDR |
| Max. IR Range | Up to 40 m | Up to 60 m |
| HD Video Output | 1 HD analog output | 1 HD analog output |
| CVBS Output | 1 CVBS output (75Ω/BNC) | 1 CVBS output (75Ω/BNC) |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | Auto/Manual/Natural | Auto/Manual/Natural |
| BLC | WDR/BLC/OFF | WDR/BLC/OFF |
| 3D DNR | 3D DNR | 3D DNR |
| Functions | Contrast, Sharpness, Saturation, Mirror, Defog, HLC | Contrast, Sharpness, Saturation, Mirror, Defog, HLC |
| Protection Level | IP67 | IP67 |
| Alarm I/O | - | - |
| Power | 12 VDC ±25% | 12 VDC ±25% |

| Model | DS-2CE57U8T-VPIT | DS-2CE78U8T-IT3 | DS-2CE19U8T-AIT3Z | DS-2CE37U8T-A | DS-2CE79U8T-IT3Z | DS-2CE59U8T-AVPIT3Z |
|--------------------------|---|---|---|---|---|---|
| Image |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |
| Description | 8 MP Ultra-Low Light Dome Camera | 8 MP Ultra-Low Light Turret Camera | 8 MP Ultra-Low Light Bullet Camera | 8 MP Ultra-Low Light Box Camera | 8 MP Ultra-Low Light Turret Camera | 8 MP Ultra-Low Light Dome Camera |
| Lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm to 12 mm motorized auto focus lens | C/CS | 2.8 mm to 12 mm motorized auto focus lens | 2.8 mm to 12 mm motorized auto focus lens |
| Min. Illumination | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | 102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm) | 102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm) | 108.1° to 45.6° | - | 108.1° to 45.6° | 108.1° to 45.6° |
| Angle Adjustment | Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360° | - | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355° |
| Day & Night | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter |
| WDR | WDR | WDR | WDR | WDR | WDR | WDR |
| Max. IR Range | Up to 40 m | Up to 60 m | Up to 80 m | - | Up to 80 m | Up to 60 m |
| HD Video Output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output |
| CVBS Output | 1 CVBS output (75Ω/BNC) | 1 CVBS output (75Ω/BNC) | 1 CVBS output (75Ω/BNC) | 1 CVBS output (75Ω/BNC) | 1 CVBS output (75Ω/BNC) | 1 CVBS output (75Ω/BNC) |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | Auto/Manual/Natural | Auto/Manual/Natural | Auto/Manual/Natural | Auto/Manual/Natural | Auto/Manual/Natural | Auto/Manual/Natural |
| BLC | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF |
| 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR |
| Functions | Contrast, Sharpness, Saturation, Mirror, Defog, HLC | Contrast, Sharpness, Saturation, Mirror, Defog, HLC | Contrast, Sharpness, Saturation, Mirror, Defog, HLC | Contrast, Sharpness, Saturation, Mirror, Defog, HLC | Contrast, Sharpness, Saturation, Mirror, Defog, HLC | Contrast, Sharpness, Saturation, Mirror, Defog, HLC |
| Protection Level | IP67, IK10 | IP67 | IP67 | - | IP67 | IP67, IK10 |
| Alarm I/O | - | - | - | support | - | - |
| Power | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25%, 24 VAC ±25% | 12 VDC ±25% 24 VAC ±25% | 12 VDC ±25% | 12 VDC ±25%, 24 VAC ±25% |

Turbo HD Cameras








Pro Series

Pro Series Cameras provide high quality imaging with advanced technologies including ultra-high-definition resolutions, ultra-low-light performance, and 130 dB True WDR. And depending on the power of the base, these cameras can give clearer details even in extremely wide, ultra-low light, and strongly back-lit places.







- > Ultra HD
- > Ultra-low-light night vision
- > 130 dB True WDR
- > PoC for easy installation
- > 4-in-1 video output
- > EXIR 2.0











| Model | DS-2CE16D8T-ITPF | DS-2CE16D8T-ITF | DS-2CE16D8T-IT1F | DS-2CE16D8T-IT3F | DS-2CE16D8T-IT5F | DS-2CE56D8T-VPITF | DS-2CE56D8T-IRS |
|--------------------------|---|---|--|---|---|---|---|
| Image |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |
| Description | 2 MP Ultra-Low Light EXIR Bullet Camera | 2 MP Ultra-Low Light Bullet Camera | 2 MP Ultra-Low Light EXIR Bullet Camera | 2 MP Ultra-Low Light Bullet Camera | 2 MP Ultra-Low Light EXIR Bullet Camera | 2 MP Ultra-Low Light Dome Camera | 2 MP Ultra-Low Light Dome Camera |
| Lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm, 8 mm fixed focal lens | 2.8 mm, 3.6 mm, 6 mm, 8 mm fixed focal lens | 2.8 mm, 3.6 mm, 6 mm, 8 mm, 12 mm fixed focal lens | 3.6 mm, 6 mm, 8 mm, 12 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens |
| Min. Illumination | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.005 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm) | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm), 38° (8 mm) | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm), 38° (8 mm) | 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm), 38° (8 mm), 24.4° (12 mm) | Horizontal Field of View 82.6° (3.6 mm), 54.4° (6 mm), 38° (8 mm), 24.4° (12 mm) | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm) | Horizontal Field of View 94.5° (2.8 mm), 79.1° (3.6 mm), 50° (6 mm) |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: -30° to 30°, Tilt: 0° to 80°, Rotate: -180° to 180° |
| Day & Night | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter |
| WDR | WDR | WDR | WDR | WDR | WDR | WDR | WDR |
| Max. IR Range | Up to 30 m | Up to 30 m | Up to 30 m | Up to 60 m | Up to 80 m | Up to 30 m | Up to 20 m |
| HD Video Output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | 1 HD analog output |
| CVBS Output | - | - | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL |
| BLC | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF |
| 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR |
| Functions | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 | IP67,IK10 | - |
| Alarm I/O | - | - | - | - | - | - | - |
| Power | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±30% |






| Model | DS-2CE56D8T-ITMF | DS-2CE56D8T-IT1F | DS-2CE56D8T-IT3F | DS-2CE16D8T-IT3ZF | DS-2CE16D8T-AIT3ZF | DS-2CE56D8T-IT3ZF | DS-2CE56D8T-ITZF |
|-------------------|---|---|---|---|---|---|---|
| Image |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |
| Description | 2 MP Ultra-Low Light Turret Camera | 2 MP Ultra-Low Light EXIR Turret Camera | 2 MP Ultra-Low Light EXIR Turret Camera | 2 MP Ultra-Low Light VF Bullet Camera | 2 MP Ultra-Low Light VF Bullet Camera | 2 MP Ultra-Low Light VF Turret Camera | 2 MP Ultra-Low Light ZF EXIR Dome Camera |
| Lens | 2.8 mm, 3.6 mm fixed focal lens | Lens 2.8 mm, 3.6 mm, fixed focal lens | 2.8 mm, 3.6 mm, 8 mm, 12 mm fixed focal lens | 2.8 mm to 12 mm motorized auto focus lens | 2.8 mm to 12 mm motorized auto focus lens | 2.8 mm to 12 mm motorized auto focus lens | 2.8 mm to 12 mm motorized auto focus lens |
| Min. Illumination | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Min. illumination Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm) | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm) | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm), 38° (8 mm), 24.4° (12 mm) | 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm), 38° (8 mm), 24.4° (12 mm) | Horizontal Field of View 32.1° to 103° | Horizontal Field of View 32.1° to 103° | Horizontal Field of View 32.1° to 103° |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Angle Adjustment Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360° | Angle Adjustment Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360° | Angle Adjustment Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: 0° to 340°, Tilt: 0° to 75°, Rotate: 0° to 355° |
| Day & Night | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter |
| WDR | WDR | WDR | WDR | WDR | WDR | WDR | WDR |
| Max. IR Range | Up to 30 m | Up to 30 m | Up to 60 m | Up to 60 m | Up to 60 m | Up to 60 m | Up to 60 m |
| HD Video Output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS |
| CVBS Output | - | - | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL |
| BLC | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF |
| 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR |
| Functions | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 | IP67 | - |
| Alarm I/O | - | - | - | - | - | - | - |
| Power | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC | 9 VDC to 15 VDC | 9 VDC to 15 VDC |

| Model | DS-2CE56D8T-AITZF | DS-2CE56D8T-VPIT3ZF | DS-2CE56D8T-AVPIT3ZF | DS-2CE5AD8T-VPIT3ZF | DS-2CE5AD8T-AVPIT3ZF | DS-2CC12D8T-AMM | DS-2CE16D8T-ITE |
|-------------------|---|---|--|---|---|---|---|
| Image |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light & PoC |
| Description | 2 MP Ultra-Low Light ZF EXIR Dome Camera | 2 MP Ultra-Low Light VF Dome Camera | 2 MP Ultra-Low Light VF Dome Camera | 2 MP Ultra-Low Light VF Dome Camera | 2 MP Ultra-Low Light VF Dome Camera | 2 MP Ultra-Low Light Box Camera | 2 MP Ultra-Low Light PoC EXIR Bullet Camera |
| Lens | 2.8 mm to 12 mm motorized auto focus lens | 2.8 mm to 12 mm motorized auto focus lens | 2.8 mm to 12 mm motorized auto focus lens | 2.8 mm to 12 mm motorized auto focus lens | 2.8 mm to 12 mm motorized auto focus lens | C/CS | 2.8 mm, 3.6 mm fixed focal lens |
| Min. Illumination | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.005 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | Horizontal Field of View 32.1° to 103° | Horizontal Field of View 32.1° to 103° | Horizontal Field of View 32.1° to 103° | Horizontal Field of View 32.1° to 103° | 32.1° to 103° | - | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm) |
| Angle Adjustment | Pan: 0° to 340°, Tilt: 0° to 75°, Rotate: 0° to 355° | Pan: 0° to 340°, Tilt: 0° to 75°, Rotate: 0° to 355° | Pan: 0° to 340°, Tilt: 0° to 75°, Rotate: 0° to 355° | Pan: 0° to 340°, Tilt: 0° to 75°, Rotate: 0° to 355° | Pan: 0° to 340°, Tilt: 0° to 75°, Rotate: 0° to 355° | - | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° |
| Day & Night | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter | - | IR Cut Filter |
| WDR | WDR | WDR | WDR | WDR | WDR | WDR | WDR |
| Max. IR Range | Up to 60 m | Up to 60 m | Up to 60 m | Up to 60 m | Up to 60 m | - | Up to 30 m |
| HD Video Output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | 1 HD analog output | 1 HD analog output |
| CVBS Output | - | - | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL |
| BLC | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF |
| 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR |
| Functions | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, sharpness, mirror | Brightness, Sharpness, Mirror, Smart IR |
| Protection Level | - | IP67,IK10 | IP67,IK10 | IP67,IK10 | IP67,IK10 | - | IP67 |
| Alarm I/O | - | - | - | - | - | - | - |
| Power | 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC | 12 VDC ±25% | 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC | 9 VDC to 15 VDC | 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC | 12 VDC ±25% 24 VAC ±25% | 12 VDC ±25%/PoC.af |




| Model | DS-2CE16D8T-IT1E | DS-2CE16D8T-IT3E | DS-2CE16D8T-IT5E | DS-2CE56D8T-VPITE | DS-2CE56D8T-ITME | DS-2CE56D8T-IT1E |
|-------------------|---|---|--|---|---|---|
| Image |  Ultra-Low Light & PoC |  Ultra-Low Light & PoC |  Ultra-Low Light & PoC |  Ultra-Low Light & PoC |  Ultra-Low Light & PoC |  Ultra-Low Light & PoC |
| Description | 2 MP Ultra-Low Light PoC Bullet Camera | 2 MP Ultra-Low Light PoC EXIR Bullet Camera | 2 MP Ultra-Low Light PoC EXIR Bullet Camera | 2 MP Ultra-Low Light PoC Dome Camera | 2 MP Ultra-Low Light PoC Turret Camera | 2 MP Ultra-Low Light PoC EXIR Turret Camera |
| Lens | 2.8 mm, 3.6 mm, 6 mm, 8 mm fixed focal lens | 2.8 mm, 3.6 mm, 6 mm, 8 mm, 12 mm fixed focal lens | 3.6 mm, 6 mm, 8 mm, 12 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens |
| Min. Illumination | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm), 38° (8 mm) | 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm), 38° (8 mm), 24.4° (12 mm) | Horizontal Field of View 82.6° (3.6 mm), 54.4° (6 mm), 38° (8 mm), 24.4° (12 mm) | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm) | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm) | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm) |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 355°, Tilt: 0° to 75°, Rotate: 0° to 355° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Angle Adjustment Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° |
| Day & Night | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter |
| WDR | WDR | WDR | WDR | WDR | WDR | WDR |
| Max. IR Range | Up to 30 m | Up to 60 m | Up to 80 m | Up to 30 m | Up to 30 m | Up to 30 m |
| HD Video Output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output |
| CVBS Output | - | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL |
| BLC | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF |
| 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR |
| Functions | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR |
| Protection Level | IP67 | IP67 | IP67 | IP67, IK10 | IP67 | IP67 |
| Alarm I/O | - | - | - | - | - | - |
| Power | 12 VDC ±25%/PoC.af | 12 VDC ±25%/PoC.af | 12 VDC ±25%/PoC.at | 12 VDC ;25%/PoC.af | 12 VDC ±25%/PoC.af | 12 VDC ±25%/PoC.af |

| Model | DS-2CE56D8T-IT3E | DS-2CE16D8T-IT3ZE | DS-2CE56D8T-IT3ZE | DS-2CE56D8T-ITZE | DS-2CE56D8T-VPIT3ZE | DS-2CE5AD8T-VPIT3ZE |
|--------------------------|---|---|---|---|---|---|
| Image |  Ultra-Low Light & PoC |  Ultra-Low Light & PoC |  Ultra-Low Light & PoC |  Ultra-Low Light & PoC |  Ultra-Low Light & PoC |  Ultra-Low Light & PoC |
| Description | 2 MP Ultra-Low Light PoC Turret Camera | 2 MP Ultra-Low Light VF PoC Bullet Camera | 2 MP Ultra-Low Light VF PoC Turret Camera | 2 MP Ultra-Low Light VF PoC EXIR Dome Camera | 2 MP Ultra-Low Light VF PoC Dome Camera | 2 MP Ultra-Low Light VF PoC Dome Camera |
| Lens | 2.8 mm, 3.6 mm, 8 mm, 12 mm fixed focal lens | 2.7 mm to 13.5 mm motorized auto focus lens | 2.7 mm to 13.5 mm motorized auto focus lens | 2.7 mm to 13.5 mm motorized auto focus lens | 2.7 mm to 13.5 mm motorized auto focus lens | 2.7 mm to 13.5 mm motorized auto focus lens |
| Min. Illumination | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm), 54.4° (6 mm), 38° (8 mm), 24.4° (12 mm) | Horizontal Field of View 32.1° to 103° | Horizontal Field of View 32.1° to 103° | Horizontal Field of View 32.1° to 103° | Horizontal Field of View 32.1° to 103° | 32.1° to 103° |
| Angle Adjustment | Angle Adjustment Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Angle Adjustment Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: 0° to 340°, Tilt: 0° to 75°, Rotate: 0° to 355° | Pan: 0° to 340°, Tilt: 0° to 75°, Rotate: 0° to 355° | Pan: 0° to 340°, Tilt: 0° to 75°, Rotate: 0° to 355° |
| Day & Night | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter |
| WDR | WDR | WDR | WDR | WDR | WDR | WDR |
| Max. IR Range | Up to 60 m | Up to 60 m | Up to 60 m | Up to 30 m | Up to 60 m | Up to 60 m |
| HD Video Output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output |
| CVBS Output | - | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL | ATW/MANUAL |
| BLC | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF |
| 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR |
| Functions | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR |
| Protection Level | IP67 | IP67 | IP67 | IP50 | IP67,IK10 | IP67,IK10 |
| Alarm I/O | - | - | - | - | - | - |
| Power | 12 VDC ±25%/PoC.af | 12 VDC ±25%/PoC.at | 12 VDC ±25%/PoC.at | 12 VDC ±25%/PoC.at | 12 VDC ±25%/PoC.af | 9 VDC to 15 VDC/PoC.af |

| Model | DS-2CE16H8T-ITF | DS-2CE16H8T-IT1F | DS-2CE16H8T-IT3F | DS-2CE16H8T-IT5F | DS-2CE57H8T-VPITF | DS-2CE76H8T-ITMF |
|-------------------|---|---|--|---|---|---|
| Image |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |
| Description | 5 MP Ultra-Low Light Bullet Camera | 5 MP Ultra-Low Light Bullet Camera | 5 MP Ultra-Low Light Bullet Camera | 5 MP Ultra-Low Light Bullet Camera | 5 MP Ultra-Low Light Dome Camera | 5 MP Ultra-Low Light Turret Camera |
| Lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm, 6 mm fixed focal lens | 2.8 mm, 3.6 mm, 6 mm, 8 mm, 12 mm fixed focal lens | 3.6 mm, 6 mm, 8 mm, 12 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens |
| Min. Illumination | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | 98° (2.8 mm), 78° (3.6 mm), 48° (6 mm) | 98° (2.8 mm), 78° (3.6 mm), 48° (6 mm) | 98° (2.8 mm), 78° (3.6 mm), 48° (6 mm), 37° (8 mm), 23° (12 mm) | 78° (3.6 mm), 48° (6 mm), 37° (8 mm), 23° (12 mm) | 98° (2.8 mm), 78° (3.6 mm), 48° (6 mm) | 98° (2.8 mm), 78° (3.6 mm), 48° (6 mm) |
| Angle Adjustment | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° |
| Day & Night | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter |
| WDR | WDR | WDR | WDR | WDR | WDR | WDR |
| Max. IR Range | Up to 30 m | Up to 30 m | Up to 60 m | Up to 80 m | Up to 30 m | Up to 30 m |
| HD Video Output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS |
| CVBS Output | - | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB |
| BLC | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF |
| DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR |
| Functions | Brightness, Sharpness, 3D DNR, Mirror, Smart IR | Brightness, Sharpness, 3D DNR, Mirror, Smart IR | Brightness, Sharpness, 3D DNR, Mirror, Smart IR | Brightness, Sharpness, 3D DNR, Mirror, Smart IR | Brightness, Sharpness, 3D DNR, Mirror, Smart IR | Brightness, Sharpness, 3D DNR, Mirror, Smart IR |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67, IK10 | IP67 |
| Alarm I/O | - | - | - | - | - | - |
| Power | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% |

| Model | DS-2CE78H8T-IT1F | DS-2CE78H8T-IT3F | DS-2CE19H8T-AIT3ZF | DS-2CE79H8T-AIT3ZF | DS-2CE56H8T-AITZF |
|-------------------|---|--|---|---|---|
| Image |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |
| Description | 5 MP Ultra-Low Light EXIR Turret Camera | 5 MP Ultra-Low Light Turret Camera | 5 MP Ultra-Low Light VF Bullet Camera | 5 MP Ultra-Low Light VF Turret Camera | 5 MP Ultra-Low Light VF Dome Camera |
| Lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm, 8 mm, 12 mm fixed focal lens | 2.7 mm to 13.5 mm motorized auto focus lens | 2.7 mm to 13.5 mm motorized auto focus lens | 2.7 mm to 13.5 mm motorized auto focus lens |
| Min. Illumination | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | 98° (2.8 mm), 78° (3.6 mm), 48° (6 mm) | 98° (2.8 mm), 78° (3.6 mm), 48° (6 mm), 37° (8 mm), 23° (12 mm) | 92.3° to 29.3° | 92.3° to 29.3° | 92.3° to 29.3° |
| Angle Adjustment | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355° |
| Day & Night | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter |
| WDR | WDR | WDR | WDR | WDR | WDR |
| Max. IR Range | Up to 30 m | Up to 60 m | Up to 80 m | Up to 60 m | Up to 60 m |
| HD Video Output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS |
| CVBS Output | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB |
| BLC | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF |
| DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR |
| Functions | Brightness, Sharpness, 3D DNR, Mirror, Smart IR | Brightness, Sharpness, 3D DNR, Mirror, Smart IR | Brightness, Sharpness, 3D DNR, Mirror, Smart IR | Brightness, Sharpness, 3D DNR, Mirror, Smart IR | Brightness, Sharpness, 3D DNR, Mirror, Smart IR |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 |
| Alarm I/O | - | - | - | - | - |
| Power | 12 VDC ±25% | 12 VDC ±25% | 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC | 12 VDC ± 20%, 24 VAC ± 20% | 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC |

| Model | DS-2CE59H8T-AVPIT3ZF | DS-2CE5AH8T-AVPIT3ZF |
|-------------------|---|---|
| Image |  Ultra-Low Light |  Ultra-Low Light |
| Description | 5 MP Ultra-Low Light VF Dome Camera | 5 MP Ultra-Low Light VF Dome Camera |
| Lens | 2.7 mm to 13.5 mm motorized auto focus lens | 2.7 mm to 13.5 mm motorized auto focus lens |
| Min. Illumination | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | 92.3° to 29.3° | 92.3° to 29.3° |
| Angle Adjustment | Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355° | Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355° |
| Day & Night | IR Cut Filter | IR Cut Filter |
| WDR | WDR | WDR |
| Max. IR Range | Up to 60 m | Up to 60 m |
| HD Video Output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS |
| CVBS Output | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW/MWB | ATW/MWB |
| BLC | WDR/BLC/OFF | WDR/BLC/OFF |
| DNR | 3D DNR | 3D DNR |
| Functions | Brightness, Sharpness, 3D DNR, Mirror, Smart IR | Brightness, Sharpness, 3D DNR, Mirror, Smart IR |
| Protection Level | IP67,IK10 | IP67,IK10 |
| Alarm I/O | - | - |
| Power | 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC | 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC |

| Model | DS-2CE16U7T-ITF | DS-2CE16U7T-IT3F | DS-2CE57U7T-VPITF |
|-------------------|---|---|---|
| Image |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |
| Description | 8 MP Ultra-Low Light Bullet Camera | 8 MP Ultra-Low Light Bullet Camera | 8 MP Ultra-Low Light Dome Camera |
| Lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm, 6 mm, 8 mm, 12 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens |
| Min. Illumination | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | 102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm) | 102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm), 37.73° (8 mm), 23.96° (12 mm) | 102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm) |
| Angle Adjustment | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355° |
| Day & Night | IR Cut Filter | IR Cut Filter | IR Cut Filter |
| WDR | WDR | WDR | WDR |
| Max. IR Range | Up to 30 m | Up to 60 m | Up to 30 m |
| HD Video Output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS |
| CVBS Output | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW/MWB | ATW/MWB | ATW/MWB |
| BLC | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF |
| 3D DNR | 3D DNR | 3D DNR | 3D DNR |
| Functions | Brightness, Sharpness, 3D DNR, Mirror, Smart IR | Brightness, Sharpness, 3D DNR, Mirror, Smart IR | Brightness, Sharpness, 3D DNR, Mirror, Smart IR |
| Protection Level | IP67 | IP67 | IP67,IK10 |
| Alarm I/O | - | - | - |
| Power | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% |

| Model | DS-2CE76U7T-ITMF | DS-2CE78U7T-IT3F | DS-2CE19U7T-AIT3ZF | DS-2CE79U7T-AIT3ZF | DS-2CE59U7T-AVPIT3ZF | DS-2CE5AU7T-AVPIT3ZF |
|-------------------|--|--|--|--|--|--|
| Image |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |  Ultra-Low Light |
| Description | 8 MP Ultra-Low Light Turret Camera | 8 MP Ultra-Low Light Turret Camera | 8 MP Ultra-Low Light Bullet Camera | 8 MP Ultra-Low Light Turret Camera | 8 MP Ultra-Low Light Dome Camera | 8 MP Ultra-Low Light Dome Camera |
| Lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm, 8 mm, 12 mm fixed focal lens | 2.7 mm to 13.5 mm motorized auto focus lens | 2.7 mm to 13.5 mm motorized auto focus lens | 2.7 mm to 13.5 mm motorized auto focus lens | 2.7 mm to 13.5 mm motorized auto focus lens |
| Min. Illumination | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | 102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm) | 102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm), 37.73° (8 mm), 23.96° (12 mm) | 108.1° to 45.6° | 108.1° to 45.6° | 108.1° to 45.6° | 108.1° to 45.6° |
| Angle Adjustment | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360° | Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355° | Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355° | Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355° |
| Day & Night | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter | IR Cut Filter |
| WDR | WDR | WDR | WDR | WDR | WDR | WDR |
| Max. IR Range | Up to 30 m | Up to 60 m | Up to 80 m | Up to 60 m | Up to 60 m | Up to 60 m |
| HD Video Output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS |
| CVBS Output | - | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB |
| BLC | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF | WDR/BLC/HLC/OFF |
| 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR | 3D DNR |
| Functions | Brightness, Sharpness, 3D DNR, Mirror, Smart IR | Brightness, Sharpness, 3D DNR, Mirror, Smart IR | Brightness, Sharpness, 3D DNR, Mirror, Smart IR | Brightness, Sharpness, 3D DNR, Mirror, Smart IR | Brightness, Sharpness, 3D DNR, Mirror, Smart IR | Brightness, Sharpness, 3D DNR, Mirror, Smart IR |
| Protection Level | IP67 | IP67 | IP67 | IP67, IK10 | IP67, IK10 | IP67, IK10 |
| Alarm I/O | - | - | - | - | - | - |
| Power | 12 VDC ±25% | 12 VDC ±25% | 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC | 12 VDC ± 20%, 24 VAC ± 20% | 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC | 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC |








Turbo HD Cameras








Value Series








Value Series Cameras offer cost-effective, high quality video security solution. Users will enjoy high definition video, plug and play through coaxial cable, high quality components, and great durability.

- > Ultra HD
- > PoC easy installation
- > Audio over coaxial
- > 4-in-1 video output
- > EXIR 2.0









| Model | DS-2CE16D0T-IRPE | DS-2CE16D0T-IRE | DS-2CE16D0T-IT1E | DS-2CE16D0T-IT3E | DS-2CE16D0T-IT5E | DS-2CE56D0T-IT1E | DS-2CE56D0T-IT3E |
|------------------------|---|---|--|---|---|---|---|
| Image |  PoC |  PoC |  PoC |  PoC |  PoC |  PoC |  PoC |
| Description | HD 1080p PoC IR Bullet Camera | HD 1080p PoC IR Bullet Camera | HD 1080p PoC EXIR Bullet Camera | HD 1080p PoC EXIR Bullet Camera | HD 1080p PoC EXIR Bullet Camera | HD 1080p PoC EXIR Turret Camera | HD 1080p PoC EXIR Turret Camera |
| Lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm, 6 mm fixed focal lens | 2.8 mm, 3.6 mm, 6 mm, 8 mm, 12 mm, 16 mm fixed focal lens | 3.6 mm, 6 mm, 8 mm, 12 mm, 16 mm fixed focal lens | 2.8 mm, 3.6 mm optional | 2.8 mm, 3.6 mm, 8 mm, 12 mm, 16 mm fixed focal lens |
| Min. Illumination | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2,AGC ON),0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2,AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR |
| FOV | 103.55° (2.8 mm), 82.63° (3.6 mm), 54.38° (6 mm) | 103.55° (2.8 mm), 82.63° (3.6 mm), 54.38° (6 mm) | 103.55° (2.8 mm), 82.63° (3.6 mm), 54.38° (6 mm) | 103.55° (2.8 mm), 82.63° (3.6 mm), 54.38° (6 mm), 37.96° (8 mm), 24.36° (12 mm), 18.92° | 82.63° (3.6 mm), 54.38° (6 mm), 37.96° (8 mm), 24.36° (12 mm), 18.92° (16 mm) | Field of view: 103° (2.8 mm), 82.2° (3.6 mm), 54° (6 mm) | 103.55° (2.8 mm), 82.63° (3.6 mm), 54.38° (6 mm), 37.96° (8 mm), 24.36° (12 mm), 18.92° (16 mm) |
| Angle Adjustment | Pan: 0° to 360°, Tilt:0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt:0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt:0° to 180°, Rotate: 0° to 360° | (16 mm)Pan: 0° to 360°, Tilt:0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt:0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360° |
| Day & Night | ICR | ICR | ICR | ICR | ICR | ICR | IR cut filter |
| WDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR |
| Max. IR Range (meters) | Up to 20 m | Up to 20 m | Up to 20 m | Up to 40 m | Up to 80 m | Up to 20 m | Up to 40 m |
| HD Video Output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 analog HD output | 1 analog HD output |
| CVBS Output | - | - | - | - | - | - | - |
| D/N Mode | Auto | Auto | Auto | Auto | Auto | Auto | Auto |
| White Balance | ATW | ATW | ATW | ATW | ATW | ATW | ATW |
| BLC | - | - | - | - | - | - | - |
| DNR | 2D | 2D | 2D | 2D | 2D | 2D | 2D |
| Functions | - | - | - | - | - | - | - |
| Protection Level | IP66 | IP66 | IP66 | IP66 | IP66 | IP66 | IP66 |
| Alarm I/O | - | - | - | - | - | - | - |
| Power | 12 VDC ±25%, PoC.af | 12 VDC ±25%, PoC.af | 12 VDC ±25%, PoC.af | 12 VDC ±25%, PoC.af | 12 VDC ±15%/PoC.at | 12 VDC ±25%, PoC.af | 12 VDC ±25%, PoC.af |









| Model | DS-2CE16D0T-VFIR3E | DS-2CE56D0T-VFIR3E | DS-2CE56D0T-VFIRE | DS-2CE56D0T-VPIR3E | DS-2CE16D0T-I2PFB | DS-2CE16D0T-I2FB | DS-2CE56D0T-I2PFB |
|------------------------|---|---|--|---|---|---|---|
| Image |  PoC |  PoC |  PoC |  PoC |  |  |  |
| Description | 2 MP Vari-focal PoC Bullet Camera | 2 MP Vari-focal PoC Turret Camera | 2 MP Vari-focal PoC Dome Camera | 2 MP Vandal Proof PoC Dome Camera | 2 MP Balun Camera | 2 MP Balun Camera | 2 MP Balun Camera |
| Lens | 2.8 mm to 12 mm | 2.8 mm to 12 mm | 2.8 mm to 12 mm | 2.8 mm to 12 mm | 2.8 mm, 3.6 mm fixed len | 2.8 mm, 3.6 mm fixed len | 2.8 mm, 3.6 mm fixed len |
| Min. Illumination | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2,AGC ON),0 Lux with IR | 0.01 Lux@(F1.2,AGC ON),0 Lux with IR | 0.01 Lux@(F1.2,AGC ON),0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | 105.2° to 32.8 ° | Horizontal Field of View 105.2° to 32.8 ° | Horizontal Field of View 105.2° to 32.8 ° | Horizontal Field of View 105.2° to 32.8 ° | 106.4° (2.8 mm), 79.6° (3.6 mm), 51.9° (6 mm) | 106.4° (2.8 mm), 79.6° (3.6 mm), 51.9° (6 mm) | 106.4° (2.8 mm), 79.6° (3.6 mm), 51.9° (6 mm) |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360° | Pan: 0° to 340°, Tilt: 0° to 75°, Rotation: 0° to 355° | Pan: 0° to 355°, Tilt: 0° to 75°, Rotation: 0° to 355° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° |
| Day & Night | ICR | IR cut filter | IR cut filter | IR cut filter | ICR | ICR | ICR |
| WDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR |
| Max. IR Range (meters) | Up to 40 m | Up to 40 m | Up to 30 m | Up to 40 m | Up to 20 m | Up to 20 m | Up to 20 m |
| HD Video Output | 1 analog HD output | 1 analog HD output | 1 analog HD output | 1 analog HD output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS |
| CVBS Output | - | - | - | - | - | - | - |
| D/N Mode | Auto | Auto | Auto | Auto | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW | ATW | ATW | ATW | Auto/Manual | Auto/Manual | Auto/Manual |
| BLC | - | - | - | - | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global |
| DNR | 2D | 2D | 2D | 2D | 2D | 2D | 2D |
| Functions | - | - | - | - | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR |
| Protection Level | IP66 | IP66 | - | IP66 | IP66 | IP66 | - |
| Alarm I/O | - | - | - | - | - | - | - |
| Power | 12 VDC ±15%/PoC.at | 12 VDC ±15%/PoC.at | 12 VDC ±15%/PoC.af | 12 VDC ±15%/PoC.af | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% |








| Model | DS-2CE56D0T-I2FB | DS-2CE70D0T-ITMF | DS-2CE16D0T-VFIR3F | DS-2CE56D0T-VFIR3F | DS-2CE56D0T-VFIRF | DS-2CE56D0T-VP1R3F | DS-2CE5A00T-VP1T3F |
|-------------------------------|---|---|--|---|---|---|---|
| Image |  |  |  |  |  |  |  |
| Description | 2 MP Balun Camera | 2 MP Camera | HD 1080p IR Bullet Camera | HD 1080p IR Turret Camera | HD 1080p IR Dome Camera | HD 1080p Vandal Proof IR Dome Camera | 2 MP Vandal Proof VF Dome Camera |
| Lens | 2.8 mm, 3.6 mm fixed len | 2.8 mm, 3.6 mm, 6 mm fixed len | 2.8 - 12 mm @ F1.4 | 2.8 - 12 mm @ F1.4 | 2.8 - 12 mm @ F1.4 | 2.8 - 12 mm @ F1.4 | 2.8 mm to 12 mm vari-focal lens |
| Min. Illumination | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2,AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2,AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2,AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2,AGC ON), 0 Lux with IR | Color: 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR |
| FOV | 106.4° (2.8 mm), 79.6° (3.6 mm), 51.9° (6 mm) | 106° (2.8 mm), 80° (3.6 mm), 51° (6 mm) | Angle of view: 102.25° - 32° | Angle of view: 102.25° - 32° | Angle of view: 102.25° - 32° | Angle of view: 102.25° - 32° | Angle of view: 102.25° - 32° |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 80°, Rotation: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360° | Pan: 0° to 340°, Tilt: 0° to 75°, Rotation: 0° to 355° | Pan: 0° to 355°, Tilt: 0° to 75°, Rotation: 0° to 355° | Pan: 0° to 355°, Tilt: 0° to 70°, Rotation: 0° to 355° |
| Day & Night | ICR | ICR | ICR | ICR | ICR | ICR | IR cut filter |
| WDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR |
| Max. IR Range (meters) | Up to 20 m | Up to 20 m | Up to 40 m | Up to 40 m | Up to 30 m | Up to 40 m | Up to 40 m |
| HD Video Output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS |
| CVBS Output | - | - | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto | Auto | Auto | Auto | Auto |
| White Balance | Auto/Manual | Auto | ATW | ATW | ATW | ATW | ATW |
| BLC | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global | - | - | - | - | - |
| DNR | 2D | 2D | 2D | 2D | 2D | 2D | 2D |
| Functions | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | - | - | - | - | - |
| Protection Level | IP66 | IP67 | IP66 | IP66 | IP66 | IP66,IK10 | IP67,IK10 |
| Alarm I/O | - | - | - | - | - | - | - |
| Power | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC±15% | 12 VDC±15% | 12 VDC±15% | 12 VDC±15% | 12 VDC ±25% |








| Model | DS-2CE16D0T-IR(C) | DS-2CE17D0T-IT1 (C) | DS-2CE17D0T-IT3(C) | DS-2CE17D0T-IT5(C) | DS-2CE56D0T-IRMM(C) | DS-2CE56D0T-IRP(C) | DS-2CE56D0T-IR(C) |
|-------------------------------|---|---|--|---|---|---|---|
| Image |  |  |  |  |  |  |  |
| Description | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS |
| Lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm, 6 mm fixed lens | 2.8 mm, 3.6 mm, 6 mm, 8 mm, 12 mm fixed lens | 3.6 mm, 6 mm, 8 mm, 12 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens |
| Min. Illumination | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR |
| FOV | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° 8 mm, horizontal FOV: 39.9°, vertical FOV: 21.9°, diagonal FOV: 46.5° 12 mm, horizontal FOV: 24.6°, vertical FOV: 13.9°, diagonal FOV: 28.1° | 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° 8 mm, horizontal FOV: 39.9°, vertical FOV: 21.9°, diagonal FOV: 46.5° 12 mm, horizontal FOV: 24.6°, vertical FOV: 13.9°, diagonal FOV: 28.1° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° |
| Angle Adjustment | Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360° | Pan: 0 to 360°, Tilt: 0 to 180°, Rotation: 0 to 360° | Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360° | Pan: 0 to 360°, Tilt: 0 to 180°, Rotation: 0 to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° |
| Day & Night | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter |
| WDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR |
| Max. IR Range (meters) | Up to 25 m | Up to 30 m | Up to 40 m | Up to 80 m | Up to 20 m | Up to 20 m | Up to 25 m |
| HD Video Output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output |
| CVBS Output | - | - | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual |
| BLC | - | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global | - | - | - |
| DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR |
| Functions | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR |
| Protection Level | IP67 | IP67 | IP67 | IP67 | - | - | IP67 |
| Alarm I/O | - | - | - | - | - | - | - |
| Power | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% |






| Model | DS-2CE56D0T-IRM(C) | DS-2CE56D0T-IT1(C) | DS-2CE56D0T-IT3(C) | DS-2CE16D0T-ITPF(C) | DS-2CE16D0T-ITF(C) | DS-2CE17D0T-IT1F | DS-2CE17D0T-IT3F | |
|-------------------------------|---|---|--|---|---|---|---|--|
| Image |  |  |  |  |  |  |  | |
| Description | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS | | | |
| Lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm, 8 mm, 12 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm, 6 mm fixed lens | 2.8 mm, 3.6 mm, 6 mm, 8 mm, 12 mm fixed lens | |
| Min. Illumination | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | |
| FOV | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° 8 mm, horizontal FOV: 39.9°, vertical FOV: 21.9°, diagonal FOV: 46.5° 12 mm, horizontal FOV: 24.6°, vertical FOV: 13.9°, diagonal FOV: 28.1° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° 8 mm, horizontal FOV: 39.9°, vertical FOV: 21.9°, diagonal FOV: 46.5° 12 mm, horizontal FOV: 24.6°, vertical FOV: 13.9°, diagonal FOV: 28.1° |
| Angle Adjustment | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360° | Pan: 0 to 360°, Tilt: 0 to 180°, Rotation: 0 to 360° | Pan: 0 to 360°, Tilt: 0 to 180°, Rotation: 0 to 360° | |
| Day & Night | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | |
| WDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR | |
| Max. IR Range (meters) | Up to 25 m | Up to 30 m | Up to 40 m | Up to 25 m | Up to 25 m | Up to 30 m | Up to 40 m | |
| HD Video Output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | |
| CVBS Output | - | - | - | - | - | - | - | |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | |
| White Balance | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | |
| BLC | - | - | - | - | - | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global | |
| DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | |
| Functions | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR | |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 | IP67 | IP67 | |
| Alarm I/O | - | - | - | - | - | - | - | |
| Power | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | |






| Model | DS-2CE17D0T-IT5F | DS-2CE56D0T-IRPF(C) | DS-2CE56D0T-IRF(C) | DS-2CE56D0T-IRMF(C) | DS-2CE76D0T-ITPF(C) | DS-2CE76D0T-ITMF(C) | DS-2CE56D0T-IRMMF(C) | |
|-------------------------------|---|---|---|---|---|---|---|---|
| Image |  |  |  |  |  |  |  | |
| Description | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS | |
| Lens | 3.6 mm, 6 mm, 8 mm, 12 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | |
| Min. Illumination | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | |
| FOV | 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° 8 mm, horizontal FOV: 39.9°, vertical FOV: 21.9°, diagonal FOV: 46.5° 12 mm, horizontal FOV: 24.6°, vertical FOV: 13.9°, diagonal FOV: 28.1° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 180°, Rotation: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 70°; Rotate: 0° to 360° | |
| Day & Night | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | |
| WDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR | |
| Max. IR Range (meters) | Up to 80 m | Up to 20 m | Up to 25 m | Up to 25 m | Up to 20 m | Up to 30 m | Up to 20 m | |
| HD Video Output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | |
| CVBS Output | - | - | - | - | - | - | - | |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | |
| White Balance | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | |
| BLC | DWDR/BLC/HLC/Global | - | - | - | - | - | - | |
| DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | |
| Functions | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR | |
| Protection Level | IP67 | - | IP67 | IP67 | - | IP67 | - | |
| Alarm I/O | - | - | - | - | - | - | - | |
| Power | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | |


| Model | DS-2CE56D0T-IT1FC) | DS-2CE56D0T-IT3FC) | DS-2CE16D0T-ITPFS | DS-2CE16D0T-ITFS | DS-2CE76D0T-ITPFS | DS-2CE76D0T-ITMFS | DS-2CE78D0T-IT3FS | DS-2CE17D0T-IT3FS | |
|------------------------|--|--|---|---|---|---|---|---|---|
| Image |  |  |  HOT |  HOT |  HOT |  HOT |  HOT |  NEW | |
| Description | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS | 2 MP CMOS | |
| Lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm, 8 mm, 12 mm fixed lens | 2.8 mm, 3.6 mm | 2.8 mm, 3.6 mm | 2.8 mm, 3.6 mm | 2.8 mm, 3.6 mm | 2.8 mm, 3.6 mm | 2.8 mm, 3.6 mm, 6 mm fixed focal lens | |
| Min. Illumination | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | |
| FOV | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° 8 mm, horizontal FOV: 39.9°, vertical FOV: 21.9°, diagonal FOV: 46.5° 12 mm, horizontal FOV: 24.6°, vertical FOV: 13.9°, diagonal FOV: 28.1° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° 8 mm, horizontal FOV: 39.9°, vertical FOV: 21.9°, diagonal FOV: 46.5° 12 mm, horizontal FOV: 24.6°, vertical FOV: 13.9°, diagonal FOV: 28.1° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° | 2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° |
| Angle Adjustment | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 180°; Rotation: 0° to 360° | |
| Day & Night | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR Cut Filter | |
| WDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR | |
| Max. IR Range (meters) | Up to 30 m | Up to 40 m | Up to 25 m | Up to 30 m | Up to 20 m | Up to 30 m | Up to 40 m | Up to 40 m | |
| HD Video Output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | |
| CVBS Output | - | - | - | - | - | - | - | - | |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | |
| White Balance | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | |
| BLC | - | - | - | - | - | - | - | BLC;HLC;Global;DWDR | |
| DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | |
| Functions | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Sharpness;Brightness; Smart IR | |
| Protection Level | IP67 | IP67 | IP67 | IP67 | - | IP67 | IP67 | IP67 | |
| Alarm I/O | - | - | - | - | - | - | - | - | |
| Power | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ± 25% | |









| Model | DS-2CE56H0T-IT3ZF | DS-2CE16H0T-AIT3ZF | DS-2CE16H0T-IT3ZF | DS-2CE56H0T-VPIT3ZF | DS-2CE56H0T-AVPIT3ZF | DS-2CE5AH0T-VPIT3ZF | DS-2CE5AH0T-AVPIT3ZF |
|-------------------|---|---|--|---|---|---|---|
| Image |  |  |  |  |  |  |  |
| Description | 5 MP Turret Camera | 5 MP Bullet Camera | 5 MP Bullet Camera | 5 MP Dome Camera | 5 MP Dome Camera | 5 MP Dome Camera | 5 MP Dome Camera |
| Lens | 2.7 mm to 13.5 mm motorized vari-focal lens | 2.7 mm to 13.5 mm motorized vari-focal lens | 2.7 mm to 13.5 mm motorized vari-focal lens | 2.7 mm to 13.5 mm motorized vari-focal lens | 2.7 mm to 13.5 mm motorized vari-focal lens | 2.7 mm to 13.5 mm motorized vari-focal lens | 2.7 mm to 13.5 mm motorized vari-focal lens |
| Min. Illumination | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | 95.7° to 29.1° | 95.7° to 29.1° | 95.7° to 29.1° | 95.7° to 29.1° | 95.7° to 29.1° | 95.7° to 29.1° | 95.7° to 29.1° |
| Angle Adjustment | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360° | Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355° | Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355° | Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355° | Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355° |
| Day & Night | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter |
| WDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR |
| Max. IR Range | Up to 40 m | Up to 40m | Up to 40 m | Up to 40 m | Up to 40 m | Up to 40 m | Up to 40 m |
| HD Video Output | switchable TVI/AHD/CVI/CVBS | switchable TVI/AHD/CVI/CVBS | switchable TVI/AHD/CVI/CVBS | switchable TVI/AHD/CVI/CVBS | switchable TVI/AHD/CVI/CVBS | switchable TVI/AHD/CVI/CVBS | switchable TVI/AHD/CVI/CVBS |
| CVBS Output | - | - | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB |
| BLC | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF |
| DNR | 2D | 2D | 2D | 2D | 2D | 2D | 2D |
| Functions | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR |
| Protection Level | IP67 | IP67 | IP67 | IP67,IK10 | IP67,IK10 | IP67,IK10 | IP67,IK10 |
| Alarm I/O | - | - | - | - | - | - | - |
| Power | 12 VDC ±25% | 12 VDC ±15%, 24 VAC ±15% | 12 VDC ±15% | 12 VDC ±15% | 12 VDC ±15%, 24 VAC ±15% | 12 VDC ±15% | 12 VDC ±15%, 24 VAC ±15% |






| Model | DS-2CE56H0T-ITZF | DS-2CE56H0T-AITZF | DS-2CE16H0T-ITE | DS-2CE16H0T-IT1E | DS-2CE16H0T-IT3E | DS-2CE16H0T-IT5E | DS-2CE56H0T-VPITE |
|-------------------|---|---|--|---|---|---|---|
| Image |  |  |  PoC |  PoC |  PoC |  PoC |  PoC |
| Description | 5 MP Dome Camera | 5 MP Dome Camera | 5 MP Bullet Camera | 5 MP Bullet Camera | 5 MP Bullet Camera | 5 MP Bullet Camera | 5 MP Dome Camera |
| Lens | 2.7 mm to 13.5 mm motorized vari-focal lens | 2.7 mm to 13.5 mm motorized vari-focal lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm, 6 mm fixed lens | 2.8 mm, 3.6 mm, 6 mm, 8 mm, 12 mm fixed lens | 3.6 mm, 6 mm, 8 mm, 12 mm fixed lens | 2.8 mm, 3.6 mm fixed lens |
| Min. Illumination | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | 95.7° to 29.1° | 95.7° to 29.1° | 85.5° (2.8 mm), 80.1° (3.6 mm), 57.1° (6 mm) | 85.5° (2.8 mm), 80.1° (3.6 mm), 57.1° (6 mm) | 85.5° (2.8 mm), 80.1° (3.6 mm), 57.1° (6 mm), 41° (8 mm), 25.7° (12 mm) | 80.1° (3.6 mm), 57.1° (6 mm), 41° (8 mm), 25.7° (12 mm) | 85.5° (2.8 mm), 80.1° (3.6 mm), 57.1° (6 mm) |
| Angle Adjustment | Pan: 0° to 340°; Tilt: 0° to 75°; Rotate: 0° to 355° | Pan: 0° to 340°; Tilt: 0° to 75°; Rotate: 0° to 355° | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355° |
| Day & Night | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter |
| WDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR |
| Max. IR Range | Up to 20 m | Up to 20 m | Up to 20 m | Up to 20 m | Up to 40 m | Up to 80 m | Up to 20 m |
| HD Video Output | switchable TVI/AHD/CVI/CVBS | switchable TVI/AHD/CVI/CVBS | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output |
| CVBS Output | - | - | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB |
| BLC | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF |
| DNR | 2D | 2D | 2D | 2D | 2D | 2D | 2D |
| Functions | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR |
| Protection Level | - | - | IP67 | IP67 | IP67 | IP67 | IP67,IK10 |
| Alarm I/O | - | - | - | - | - | - | - |
| Power | 12 VDC ±15% | 12 VDC ±15%, 24 VAC ±15% | 12 VDC ±25%, PoC.af | 12 VDC ±25%, PoC.af | 12 VDC ±25%, PoC.af | 12 VDC ±25%, PoC.at | 12 VDC ±25%, PoC.af |







| Model | DS-2CE56H0T-ITME | DS-2CE56H0T-IT1E | DS-2CE56H0T-IT3E | DS-2CE16H0T-IT3ZE | DS-2CE56H0T-IT3ZE |
|-------------------|--|--|--|--|--|
| Image |  PoC |  PoC |  PoC |  PoC |  PoC |
| Descriptio | 5 MP Turret Camera | 5 MP Turret Camera | 5 MP Turret Camera | 5 MP Bullet Camera | 5 MP Turret Camera |
| Lens | 2.8 mm, 3.6 mm fixed Lens | 2.8 mm, 3.6 mm fixed Lens | 2.8 mm, 3.6 mm, 8 mm, 12 mm fixed lens | 2.7 mm to 13.5 mm motorized vari-focal lens | 2.7 mm to 13.5 mm motorized vari-focal lens |
| Min. Illumination | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | 85.5° (2.8 mm), 80.1° (3.6 mm), 57.1° (6 mm) | 85.5° (2.8 mm), 80.1° (3.6 mm), 57.1° (6 mm) | 85.5° (2.8 mm), 80.1° (3.6 mm), 57.1° (6 mm), 41° (8 mm), 25.7° (12 mm) | 95.7° to 29.1° | 95.7° to 29.1° |
| Angle Adjustment | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° |
| Day & Night | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter |
| WDR | DWDR | DWDR | DWDR | DWDR | DWDR |
| Max. IR Range | Up to 20 m | Up to 20 m | Up to 40 m | Up to 40 m | Up to 40 m |
| HD Video Output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output |
| CVBS Output | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB |
| BLC | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF |
| DNR | 2D | 2D | 2D | 2D | 2D |
| Functions | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 |
| Alarm I/O | - | - | - | - | - |
| Power | 12 VDC ±25%, PoC.af | 12 VDC ±25%, PoC.af | 12 VDC ±25%, PoC.af | 12 VDC ±25%, PoC.at | 12 VDC ±25%, PoC.at |







| Model | DS-2CE56H0T-ITZE | DS-2CE56H0T-VPIT3ZE | DS-2CE5AH0T-VPIT3ZE | DS-2CE16H0T-ITPF(C) | DS-2CE16H0T-ITFC |
|-------------------|--|--|--|--|--|
| Image |  PoC |  PoC |  PoC |  |  |
| Description | 5 MP Dome Camera | 5 MP Dome Camera | 5 MP Dome Camera | 5 MP high performance COMS | 5MP high performance COMS |
| Lens | 2.7 mm to 13.5 mm motorized vari-focal lens | 2.7 mm to 13.5 mm motorized vari-focal lens | 2.7 mm to 13.5 mm motorized vari-focal lens | 2.4 mm, 2.8 mm, 3.6 mm fixed lens | 2.4 mm, 2.8 mm, 3.6 mm fixed lens |
| Min. Illumination | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | 95.7° to 29.1° | 95.7° to 29.1° | 95.7° to 29.1° | 2.4 mm, horizontal FOV: 110°, vertical FOV: 81°, diagonal FOV:137° 2.8 mm, horizontal FOV: 85°, vertical FOV: 63°, diagonal FOV:110° 3.6 mm, horizontal FOV: 80°, vertical FOV: 63°, diagonal FOV:105° 6 mm, horizontal FOV: 57°, vertical FOV: 43°, diagonal FOV:72° | 2.4 mm, horizontal FOV: 110°, vertical FOV: 81°, diagonal FOV:137° 2.8 mm, horizontal FOV: 85°, vertical FOV: 63°, diagonal FOV:110° 3.6 mm, horizontal FOV: 80°, vertical FOV: 63°, diagonal FOV:105° 6 mm, horizontal FOV: 57°, vertical FOV: 43°, diagonal FOV:72° |
| Angle Adjustment | Pan: 0° to 340°; Tilt: 0° to 75°; Rotate: 0° to 355° | Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355° | Pan: 0° to 340°; Tilt: 0° to 75°; Rotate: 0° to 355° | Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360° |
| Day & Night | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter |
| WDR | DWDR | DWDR | DWDR | DWDR | DWDR |
| Max. IR Range | Up to 20 m | Up to 40 m | Up to 40 m | Up to 25 m | Up to 30 m |
| HD Video Output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output | 1 HD analog output |
| CVBS Output | | | | TVI/AHD/CVI/CVBS | TVI/AHD/CVI/CVBS |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB |
| BLC | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | Support | Support |
| DNR | 2D | 2D | 2D | 2D DNR | 2D DNR |
| Functions | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR |
| Protection Level | IP67 | IP67,IK10 | IP67,IK10 | IP67 | IP67 |
| Alarm I/O | - | - | - | - | - |
| Power | 12 VDC ±25%, PoC.af | 12 VDC ±25%, PoC.af | 12 VDC ±25%, PoC.af | 12 VDC ± 25% | 12 VDC ± 25% |







| Model | DS-2CE17H0T-IT1F(C) | DS-2CE17H0T-IT3F(C) | DS-2CE17H0T-IT5F(C) | DS-2CE76H0T-ITMF(C) | DS-2CE76H0T-ITPF(C) | DS-2CE56H0T-IRMMF(C) | DS-2CE57H0T-VPITF (C) | |
|--------------------------|--|---|--|--|--|--|---|--|
| Image |  |  |  |  |  |  |  | |
| Descriptio | 5 MP CMOS | 5 MP CMOS | 5 MP CMOS | - | - | 5 MP high performance CMOS | - | |
| Lens | 2.4 mm, 2.8 mm, 3.6 mm, 6 mm fixed lens | 2.8 mm, 3.6 mm, 6 mm, 8 mm, 12 mm fixed lens | 3.6 mm, 6 mm, 8 mm, 12 mm fixed lens | 2.4 mm, 2.8 mm, 6 mm fixed lens | 2.4 mm, 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | |
| Min. Illumination | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | |
| FOV | 2.4 mm, horizontal FOV: 110°, vertical FOV: 81°, diagonal FOV:137° 2.8 mm, horizontal FOV: 85°, vertical FOV: 63°, diagonal FOV:110° 3.6 mm, horizontal FOV: 80°, vertical FOV: 63°, diagonal FOV:105° 6 mm, horizontal FOV: 57°, vertical FOV: 43°, diagonal FOV:72° | 2.8 mm, horizontal FOV: 85°, vertical FOV: 63°, diagonal FOV:110° 3.6 mm, horizontal FOV: 80°, vertical FOV: 63°, diagonal FOV:105° 6 mm, horizontal FOV: 57°, vertical FOV: 43°, diagonal FOV:72° 8 mm, horizontal FOV: 41°, vertical FOV: 31°, diagonal FOV:52° 12 mm, horizontal FOV: 26°, vertical FOV: 19°, diagonal FOV:32° | 3.6 mm, horizontal FOV: 80°, vertical FOV: 63°, diagonal FOV:105° 6 mm, horizontal FOV: 57°, vertical FOV: 43°, diagonal FOV:72° 8 mm, horizontal FOV: 41°, vertical FOV: 31°, diagonal FOV:52° 12 mm, horizontal FOV: 26°, vertical FOV: 19°, diagonal FOV:32° | 2.4 mm, horizontal FOV: 110°, vertical FOV: 81°, diagonal FOV:137° 2.8 mm, horizontal FOV: 85°, vertical FOV: 63°, diagonal FOV:110° 3.6 mm, horizontal FOV: 80°, vertical FOV: 63°, diagonal FOV:105° 6 mm, horizontal FOV: 57°, vertical FOV: 43°, diagonal FOV:72° | 2.4 mm, horizontal FOV: 110°, vertical FOV: 81°, diagonal FOV:137° 2.8 mm, horizontal FOV: 85°, vertical FOV: 63°, diagonal FOV:110° 3.6 mm, horizontal FOV: 80°, vertical FOV: 63°, diagonal FOV:105° 6 mm, horizontal FOV: 57°, vertical FOV: 43°, diagonal FOV:72° | 2.4 mm, horizontal FOV: 110°, vertical FOV: 81°, diagonal FOV:137° 2.8 mm, horizontal FOV: 85°, vertical FOV: 63°, diagonal FOV:110° 3.6 mm, horizontal FOV: 80°, vertical FOV: 63°, diagonal FOV:105° 6 mm, horizontal FOV: 57°, vertical FOV: 43°, diagonal FOV:72° | 85.5° (2.8 mm), 80.1° (3.6 mm), 57.1° (6 mm) | 2.8 mm, horizontal FOV: 85°, vertical FOV: 63°, diagonal FOV:110° 3.6 mm, horizontal FOV: 80°, vertical FOV: 63°, diagonal FOV:105° 6 mm, horizontal FOV: 57°, vertical FOV: 43°, diagonal FOV:72° |
| Angle Adjustment | Pan: 0 to 360°, Tilt: 0 to 180°, Rotation 0 to 360° | Pan: 0 to 360°, Tilt: 0 to 180°, Rotation 0 to 360° | Pan: 0 to 360°, Tilt: 0 to 180°, Rotation 0 to 360° | Pan: 0 to 360°, Tilt: 0 to 75°, Rotation 0 to 360° | Pan: 0 to 360°, Tilt: 0 to 75°, Rotation 0 to 360° | Pan: 0° to 350°; Tilt: 0° to 70°; Rotate: 0° to 350° | Pan: 0 to 360°, Tilt: 0 to 75°, Rotation 0 to 360° | |
| Day & Night | ICR | ICR | ICR | ICR | ICR | ICR | ICR | |
| WDR | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global | Support | DWDR/BLC/HLC/Global | |
| Max. IR Range | Up to 30 m | Up to 40 m | Up to 80 m | Up to 30 m | Up to 20 m | Up to 20 m | Up to 20 m | |
| HD Video Output | Switchable TVI/AHD/CVI/CVBS | Switchable TVI/AHD/CVI/CVBS | Switchable TVI/AHD/CVI/CVBS | Switchable TVI/AHD/CVI/CVBS | Switchable TVI/AHD/CVI/CVBS | 1 HD analog output | Switchable TVI/AHD/CVI/CVBS | |
| CVBS Output | - | - | - | - | - | TVI/AHD/CVI/CVBS | - | |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | |
| White Balance | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | ATW/MWB | Auto/Manual | |
| BLC | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global | Support | DWDR/BLC/HLC/Global | |
| DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | |
| Functions | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 | Support | IP67 | |
| Alarm I/O | - | - | - | - | - | - | - | |
| Power | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | |






| Model | DS-2CE78H0T-IT1F (C) | DS-2CE78H0T-IT3F(C) | DS-2CE16H0T-ITPFS | DS-2CE16H0T-ITFS | DS-2CE76H0T-ITPFS | DS-2CE76H0T-ITMFS | DS-2CE78H0T-IT3FS | DS-2CE78H0T-IT3FS | |
|-------------------|---|---|---|---|---|---|---|---|--|
| Image |  |  |  Built-in Mic |  Built-in Mic |  Built-in Mic |  Built-in Mic |  Built-in Mic |  NEW | |
| Description | - | 5 MP CMOS | 5 MP CMOS | 5 MP CMOS | 5 MP CMOS | 5 MP CMOS | 5 MP CMOS | 5 MP CMOS | |
| Lens | 2.4 mm, 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm, 6 mm fixed focal lens | |
| Min. Illumination | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | |
| FOV | 2.4 mm, horizontal FOV: 110°, vertical FOV: 81°, diagonal FOV:137° 2.8 mm, horizontal FOV: 85°, vertical FOV: 63°, diagonal FOV: 110° 3.6 mm, horizontal FOV: 80.1°, vertical FOV: 63.7°, diagonal FOV: 105.9° 6 mm, horizontal FOV: 57.1°, vertical FOV: 43.1°, diagonal FOV: 72.5° | 2.8 mm, horizontal FOV: 85.5°, vertical FOV: 63.7°, diagonal FOV: 110.7° 3.6 mm, horizontal FOV: 80.1°, vertical FOV: 63.7°, diagonal FOV: 105.9° 6 mm, horizontal FOV: 57.1°, vertical FOV: 43.1°, diagonal FOV: 72.5° | 2.8 mm, horizontal FOV: 85.5°, vertical FOV: 63.7°, diagonal FOV: 110.7° 3.6 mm, horizontal FOV: 80.1°, vertical FOV: 63.7°, diagonal FOV: 105.9° 6 mm, horizontal FOV: 57.1°, vertical FOV: 43.1°, diagonal FOV: 72.5° | 2.8 mm, horizontal FOV: 85.5°, vertical FOV: 63.7°, diagonal FOV: 110.7° 3.6 mm, horizontal FOV: 80.1°, vertical FOV: 63.7°, diagonal FOV: 105.9° 6 mm, horizontal FOV: 57.1°, vertical FOV: 43.1°, diagonal FOV: 72.5° | 2.8 mm, horizontal FOV: 85.5°, vertical FOV: 63.7°, diagonal FOV: 110.7° 3.6 mm, horizontal FOV: 80.1°, vertical FOV: 63.7°, diagonal FOV: 105.9° 6 mm, horizontal FOV: 57.1°, vertical FOV: 43.1°, diagonal FOV: 72.5° | 2.8 mm, horizontal FOV: 85.5°, vertical FOV: 63.7°, diagonal FOV: 110.7° 3.6 mm, horizontal FOV: 80.1°, vertical FOV: 63.7°, diagonal FOV: 105.9° 6 mm, horizontal FOV: 57.1°, vertical FOV: 43.1°, diagonal FOV: 72.5° | 2.8 mm, horizontal FOV: 85.5°, vertical FOV: 63.7°, diagonal FOV: 110.7° 3.6 mm, horizontal FOV: 80.1°, vertical FOV: 63.7°, diagonal FOV: 105.9° 6 mm, horizontal FOV: 57.1°, vertical FOV: 43.1°, diagonal FOV: 72.5° | 2.8 mm, horizontal FOV: 85.5°, vertical FOV: 63.7°, diagonal FOV: 110.7° 3.6 mm, horizontal FOV: 80.1°, vertical FOV: 63.7°, diagonal FOV: 105.9° 6 mm, horizontal FOV: 57.1°, vertical FOV: 43.1°, diagonal FOV: 72.5° | 2.8 mm, horizontal FOV: 85°, vertical FOV: 63°, diagonal FOV:110° 3.6 mm, horizontal FOV: 80°, vertical FOV: 63°, diagonal FOV:105° 6 mm, horizontal FOV: 57°, vertical FOV: 43°, diagonal FOV:72° |
| Angle Adjustment | Pan: 0 to 360°, Tilt: 0 to 75°, Rotation 0 to 360° | Pan: 0 to 360°, Tilt: 0 to 75°, Zoom 0 to 360° | Pan: 0 to 355°, Tilt: 0 to 75°, Zoom 0 to 355° | Pan: 0 to 355°, Tilt: 0 to 75°, Zoom 0 to 355° | Pan: 0 to 360°, Tilt: 0 to 75°, Zoom 0 to 360° | Pan: 0 to 360°, Tilt: 0 to 75°, Zoom 0 to 360° | Pan: 0 to 360°, Tilt: 0 to 75°, Zoom 0 to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotation: 0° to 360° | |
| Day & Night | ICR | ICR | ICR | ICR | ICR | ICR | ICR | IR Cut Filter | |
| WDR | DWDR/BLC/HLC/Global | Digital WDR | Digital WDR | Digital WDR | Digital WDR | Digital WDR | Digital WDR | Digital WDR | |
| Max. IR Range | - | Up to 40 m | Up to 25 m | Up to 30 m | Up to 20 m | Up to 30 m | Up to 40 m | Up to 40 m | |
| HD Video Output | Switchable TVI/AHD/CVI/CVBS | Switchable TVI/AHD/CVI/CVBS | Switchable TVI/AHD/CVI/CVBS | Switchable TVI/AHD/CVI/CVBS | Switchable TVI/AHD/CVI/CVBS | Switchable TVI/AHD/CVI/CVBS | Switchable TVI/AHD/CVI/CVBS | Switchable TVI/AHD/CVI/CVBS | |
| CVBS Output | - | - | - | - | - | - | - | - | |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | |
| White Balance | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | |
| BLC | DWDR/BLC/HLC/Global | - | - | - | - | - | - | DWDR, BLC, HLC, Global | |
| DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | 2D DNR | |
| Functions | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Mirror, Smart IR, Sharpness | |
| Protection Level | IP67 | IP67 | IP67 | IP67 | - | IP67 | IP67 | IP67 | |
| Alarm I/O | - | - | - | - | - | - | - | - | |
| Power | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | |






| Model | DS-2CE16U1T-ITF | DS-2CE16U1T-ITPF | DS-2CE16U1T-IT1F | DS-2CE16U1T-IT3F | DS-2CE16U1T-IT5F | DS-2CE57U1T-VP1TF |
|------------------------|---|---|---|---|---|---|
| Image |  |  |  |  |  |  |
| Description | 8 MP Bullet Camera | 8 MP Bullet Camera | 8 MP Bullet Camera | 8 MP Bullet Camera | 8 MP Bullet Camera | 8 MP Bullet Camera |
| Lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm, 6 mm fixed focal lens | 2.8 mm, 3.6 mm, 6 mm, 8 mm, 12 mm fixed focal lens | 3.6 mm, 6 mm, 8 mm, 12 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens |
| Min. Illumination | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | 102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm) | 102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm) | 102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm) | 102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm), 37.73° (8 mm), 23.96° (12 mm) | 79° (3.6 mm), 50.8° (6 mm), 37.73° (8 mm), 23.96° (12 mm) | 102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm) |
| Angle Adjustment | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360° | Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355° |
| Day & Night | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter |
| WDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR |
| Max. IR Range (meters) | Up to 30 m | Up to 30 m | Up to 30 m | Up to 60 m | Up to 80 m | Up to 30 m |
| HD Video Output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS |
| CVBS Output | - | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB |
| BLC | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF |
| DNR | 2D | 2D | 2D | 2D | 2D | 2D |
| Functions | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 | IP67, IK10 |
| Alarm I/O | - | - | - | - | - | - |
| Power | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% |








| Model | DS-2CE76U1T-ITPF | DS-2CE76U1T-ITMF | DS-2CE78U1T-IT1F | DS-2CE78U1T-IT3F | DS-2CE19U1T-IT3ZF | DS-2CE19U1T-AIT3ZF |
|-------------------------------|---|---|--|---|---|---|
| Image |  |  |  |  |  |  |
| Description | 8 MP Bullet Camera | 8 MP Bullet Camera | 8 MP Bullet Camera | 8 MP Bullet Camera | 8 MP Bullet Camera | 8 MP Bullet Camera |
| Lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm fixed focal lens | 2.8 mm, 3.6 mm, 8 mm, 12 mm fixed focal lens | 2.7 mm to 13.5 mm motorized auto focus lens | 2.7 mm to 13.5 mm motorized auto focus lens |
| Min. Illumination | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | 102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm) | 102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm) | 102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm) | 102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm), 37.73° (8 mm), 23.96° (12 mm) | 108.1° to 45.6° | 108.1° to 45.6° |
| Angle Adjustment | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360° | Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360° |
| Day & Night | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter |
| WDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR |
| Max. IR Range (meters) | Up to 30 m | Up to 30 m | Up to 30 m | Up to 60 m | Up to 60 m | Up to 60 m |
| HD Video Output | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS | Switchable TVI / AHD / CVI / CVBS |
| CVBS Output | - | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB | ATW/MWB |
| BLC | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF | WDR/BLC/OFF |
| DNR | 2D | 2D | 2D | 2D | 2D | 2D |
| Functions | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR | Brightness, Sharpness, DNR, Mirror, Smart IR |
| Protection Level | - | IP67 | IP67 | IP67 | IP67 | IP67 |
| Alarm I/O | - | - | - | - | - | - |
| Power | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC |

| Model | DS-2CE11D0T-PIRL | DS-2CE11D0T-PIRLP | DS-2CE11D0T-PIRLO | DS-2CE11D0T-PIRLP0 | DS-2CE71D0T-PIRL | DS-2CE71D0T-PIRLP |
|------------------------|--|--|--|--|--|--|
| Image |  PIR Detection & Light Alarm |  PIR Detection & Light Alarm |  PIR Detection & Light Alarm |  PIR Detection & Light Alarm |  PIR Detection & Light Alarm |  PIR Detection & Light Alarm |
| Description | 2 MP PIR Bullet Camera | 2 MP PIR Bullet Camera | 2 MP PIR Bullet Camera | 2 MP PIR Bullet Camera | 2 MP PIR Turret Camera | 2 MP PIR Turret Camera |
| Lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens |
| Min. Illumination | 0.01 Lux @ (F1.2,AGC ON),0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2,AGC ON),0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm) | 103° (2.8 mm), 82.2° (3.6 mm) | 103° (2.8 mm), 82.2° (3.6 mm) | 103° (2.8 mm), 82.2° (3.6 mm) | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm) | 103° (2.8 mm), 82.2° (3.6 mm) |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° |
| Day & Night | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter |
| WDR | DWDR | DWDR | DWDR | DWDR | DWDR | DWDR |
| Max. IR Range (meters) | Up to 20 m | Up to 20 m | Up to 20 m | Up to 20 m | Up to 20 m | Up to 20 m |
| HD Video Output | 1 HD Analog Output | 1 HD Analog Output | 1 HD Analog Output | 1 HD Analog Output | 1 HD Analog Output | 1 HD Analog Output |
| CVBS Output | - | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual |
| BLC | WDR/BLC/OFF | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global | WDR/BLC/OFF | DWDR/BLC/HLC/Global |
| DNR | 2D | 2D | 2D | 2D | 2D | 2D |
| Functions | PIR detection,Flashing Light Alarm,Brightness, Contrast, Sharpness, Saturation, DNR, Mirror | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | PIR detection,Flashing Light Alarm,Brightness, Contrast, Sharpness, Saturation, DNR, Mirror | Brightness, Sharpness, Mirror, Smart IR |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 | IP67 |
| Alarm I/O | - | - | 1 alarm out | 1 alarm out | - | - |
| Power | 12 VDC ±25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ±25% | 12 VDC ± 25% |

| Model | DS-2CE71D0T-PIRLO | DS-2CE71D0T-PIRLP0 | DS-2CE12D0T-PIRL | DS-2CE12D0T-PIRLO | DS-2CE11D8T-PIRL | DS-2CE11D8T-PIRLO |
|-------------------------------|--|--|---|--|--|--|
| Image |  PIR Detection & Light Alarm |  PIR Detection & Light Alarm |  PIR Detection & Light Alarm |  PIR Detection & Light Alarm |  PIR Detection & Light Alarm |  PIR Detection & Light Alarm |
| Description | 2 MP PIR Turret Camera | 2 MP PIR Turret Camera | 2 MP PIR Bullet Camera | 2 MP PIR Bullet Camera | 2 MP Ultra-Low-Light PIR Bullet Camera | 2 MP PIR Bullet Camera |
| Lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens |
| Min. Illumination | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | 103° (2.8 mm), 82.2° (3.6 mm) | 103° (2.8 mm), 82.2° (3.6 mm) | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm) | 103° (2.8 mm), 82.2° (3.6 mm) | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm) | 103° (2.8 mm), 82.2° (3.6 mm) |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° |
| Day & Night | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter |
| WDR | DWDR | DWDR | DWDR | DWDR | WDR | DWDR |
| Max. IR Range (meters) | Up to 20 m | Up to 20 m | Up to 20 m | Up to 20 m | Up to 20 m | Up to 20 m |
| HD Video Output | 1 HD Analog Output | 1 HD Analog Output | 1 HD Analog Output | 1 HD Analog Output | 1 HD Analog Output | 1 HD Analog Output |
| CVBS Output | - | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | ATW/MANUAL | Auto/Manual |
| BLC | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global | WDR/BLC/OFF | DWDR/BLC/HLC/Global | WDR/BLC/OFF | DWDR/BLC/HLC/Global |
| DNR | 2D | 2D | 2D | 2D | 3D (Level 1 to 10) | 2D |
| Functions | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | PIR detection, Flashing Light Alarm, Brightness, Contrast, Sharpness, Saturation, DNR, Mirror | Brightness, Sharpness, Mirror, Smart IR | PIR detection, Flashing Light Alarm, Brightness, Contrast, Sharpness, Saturation, DNR, Mirror | Brightness, Sharpness, Mirror, Smart IR |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 | IP67 |
| Alarm I/O | 1 alarm out | 1 alarm out | - | 1 alarm out | - | 1 alarm out |
| Power | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% |

| Model | DS-2CE71D8T-PIRL | DS-2CE71D8T-PIRLO | DS-2CE12D8T-PIRL | DS-2CE12D8T-PIRLO | DS-2CE11H0T-PIRL |
|------------------------|---|---|---|---|---|
| Image |  PIR Detection & Light Alarm |  PIR Detection & Light Alarm |  PIR Detection & Light Alarm |  PIR Detection & Light Alarm |  PIR Detection & Light Alarm |
| Description | 2 MP Ultra-Low-Light PIR Turret Camera | 2 MP Ultra-Low-Light PIR Turret Camera | 2 MP Ultra-Low-Light PIR Bullet Camera | 2 MP Ultra-Low-Light PIR Bullet Camera | 5 MP PIR Bullet Camera |
| Lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens |
| Min. Illumination | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm) | 103.5° (2.8 mm), 79.1° (3.6 mm) | Horizontal Field of View 103.5° (2.8 mm), 82.6° (3.6 mm) | 103.5° (2.8 mm), 79.1° (3.6 mm) | 85.5° (2.8 mm), 80.1° (3.6 mm) |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° |
| Day & Night | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter |
| WDR | WDR | WDR | WDR | WDR | DWDR |
| Max. IR Range (meters) | Up to 20 m | Up to 20 m | Up to 20 m | Up to 20 m | Up to 20 m |
| HD Video Output | 1 HD Analog Output | 1 HD Analog Output | 1 HD Analog Output | 1 HD Analog Output | 1 HD Analog Output |
| CVBS Output | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW/MANUAL | Auto/Manual | ATW/MANUAL | Auto/Manual | Auto/Manual |
| BLC | WDR/BLC/OFF | WDR/BLC/HLC/Global | WDR/BLC/OFF | WDR/BLC/HLC/Global | WDR/BLC/OFF |
| DNR | 3D (Level 1 to 10) | 3D | 3D (Level 1 to 10) | 3D | 2D |
| Functions | PIR detection, Flashing Light Alarm, Brightness, Contrast, Sharpness, Saturation, DNR, Mirror | Brightness, Sharpness, Mirror, Smart IR | PIR detection, Flashing Light Alarm, Brightness, Contrast, Sharpness, Saturation, DNR, Mirror | Brightness, Sharpness, Mirror, Smart IR | PIR detection, Flashing Light Alarm, Brightness, Contrast, Sharpness, Saturation, DNR, Mirror |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 |
| Alarm I/O | - | 1 alarm out | - | 1 alarm out | - |
| Power | 12 VDC ±25% | 12 VDC ± 25% | 12 VDC ±25% | 12 VDC ± 25% | 12 VDC ±25% |

| Model | DS-2CE11H0T-PIRLP | DS-2CE11H0T-PIRLO | DS-2CE11H0T-PIRLP0 | DS-2CE71H0T-PIRL | DS-2CE71H0T-PIRLO |
|-------------------------------|---|---|---|---|---|
| Image |  PIR Detection & Light Alarm |  PIR Detection & Light Alarm |  PIR Detection & Light Alarm |  PIR Detection & Light Alarm |  PIR Detection & Light Alarm |
| Description | 5 MP PIR Bullet Camera | 5 MP PIR Bullet Camera | 5 MP PIR Bullet Camera | 5 MP PIR Turret Camera | 5 MP PIR Turret Camera |
| Lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens | 2.8 mm, 3.6 mm fixed lens |
| Min. Illumination | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | 85.5° (2.8 mm), 80.1° (3.6 mm) | 85.5° (2.8 mm), 80.1° (3.6 mm) | 85.5° (2.8 mm), 80.1° (3.6 mm) | 85.5° (2.8 mm), 80.1° (3.6 mm) | 85.5° (2.8 mm), 80.1° (3.6 mm) |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° |
| Day & Night | IR cut filter | IR cut filter | IR cut filter | IR cut filter | IR cut filter |
| WDR | DWDR | DWDR | DWDR | DWDR | DWDR |
| Max. IR Range (meters) | Up to 20 m | Up to 20 m | Up to 20 m | Up to 20 m | Up to 20 m |
| HD Video Output | 1 HD Analog Output | 1 HD Analog Output | 1 HD Analog Output | 1 HD Analog Output | 1 HD Analog Output |
| CVBS Output | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual |
| BLC | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global | DWDR/BLC/HLC/Global | WDR/BLC/OFF | DWDR/BLC/HLC/Global |
| DNR | 2D | 2D | 2D | 2D | 2D |
| Functions | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart IR | PIR detection, Flashing Light Alarm, Brightness, Contrast, Sharpness, Saturation, DNR, Mirror | Brightness, Sharpness, Mirror, Smart IR |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 |
| Alarm I/O | - | 1 alarm out | 1 alarm out | - | 1 alarm out |
| Power | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% |

| Model | DS-2CE72D0T-PIRXF | DS-2CE12DFT-PIRX0F28 (2.8mm) | DS-2CE12DFT-PIRX0F | DS-2CE72DFT-PIRX0F28 (2.8mm) | DS-2CE72DFT-PIRX0F | DS-2CE12DF3T-PIRX0S | DS-2CE72DF3T-PIRX0S |
|------------------------|---|---|--|---|--|--|---|
| Image |  PIR detection & strobe light alarm & audible alarm |  PIR detection & strobe light alarm & audible alarm |  PIR detection & strobe light alarm & audible alarm |  PIR detection & strobe light alarm & audible alarm |  PIR detection & strobe light alarm & audible alarm |  PIR detection & strobe light alarm & audible alarm |  PIR detection & strobe light alarm & audible alarm |
| Description | 2 MP PIR Turret Camera | 2 MP PIR Bullet Camera | 2 MP PIR Bullet Camera | 2 MP PIR Turret Camera | 2 MP PIR Turret Camera | 2 MP PIR Bullet Camera | 2 MP PIR Turret Camera |
| Lens | 2.8 mm, 3.6 mm lens | 2.8 mm fixed lens | 3.6 mm 6 mm fixed lens | 2.8 mm fixed lens | 3.6 mm fixed lens | 2.8 mm, 3.6 mm, 6 mm fixed focal lens | 2.8 mm fixed focal lens |
| Min. Illumination | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with IR | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with IR | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with IR | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with IR | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with white light | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with white light |
| FOV | 2.8 mm, horizontal FOV: 106°, vertical FOV: 57°, diagonal FOV: 124° 3.6 mm, horizontal FOV: 81°, vertical FOV: 43°, diagonal FOV: 96° 6 mm, horizontal FOV: 51°, vertical FOV: 29°, diagonal FOV: 58° | 2.8 mm, horizontal FOV: 104°, vertical FOV: 54°, diagonal FOV: 126 | 3.6 mm, horizontal FOV: 83.0°, vertical FOV: 44.4°, diagonal FOV: 98.0° 6 mm, horizontal FOV: 51.0°, vertical FOV: 28.5°, diagonal FOV: 58.7° | 2.8 mm, horizontal FOV: 104°, vertical FOV: 54°, diagonal FOV: 126 | 3.6 mm, horizontal FOV: 83.0°, vertical FOV: 44.4°, diagonal FOV: 98.0° 6 mm, horizontal FOV: 51.0°, vertical FOV: 28.5°, diagonal FOV: 58.7° | 2.8 mm, horizontal FOV: 98°, vertical FOV: 52°, diagonal FOV: 116° 3.6 mm, horizontal FOV: 77°, vertical FOV: 42°, diagonal FOV: 91° 6 mm, horizontal FOV: 51°, vertical FOV: 28°, diagonal FOV: 59° | 2.8 mm, horizontal FOV: 98°, vertical FOV: 52°, diagonal FOV: 116° 3.6 mm, horizontal FOV: 77°, vertical FOV: 42°, diagonal FOV: 91° |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 180°, Rotation: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360° |
| Day & Night | IR cut filter | Color | Color | Color | Color | Color | Color |
| WDR | DWDR | WDR | WDR | WDR | WDR | WDR | WDR |
| Max. IR Range (meters) | Up to 20 m | Up to 40 m white light distance | Up to 40 m white light distance | Up to 20 m white light distance | Up to 20 m white light distance | Up to 40 m | Up to 20 m |
| HD Video Output | Switchable TVI/AHD/CVI/CVBS | Switchable TVI/AHD/CVI/CVBS | Switchable TVI/AHD/CVI/CVBS | Switchable TVI/AHD/CVI/CVBS | Switchable TVI/AHD/CVI/CVBS | 1 HD analog output | 1 HD analog output |
| CVBS Output | - | - | - | - | - | - | - |
| D/N Mode | Auto/Color/BW (Black and White) | Color | Color | Color | Color | Color | Color |
| White Balance | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual |
| BLC | - | - | - | - | - | WDR, BLC, HLC, Global, HLS | WDR, BLC, HLC, Global, HLS |
| DNR | 2D | 3D DNR/ 2D DNR | 3D DNR/ 2D DNR | 3D DNR/ 2D DNR | 3D DNR/ 2D DNR | 3D DNR/2D DNR | 3D DNR/2D DNR |
| Functions | Brightness, Sharpness, Mirror, Smart IR | Brightness, Sharpness, Mirror, Smart Light, Defective Pixel Correction | Brightness, Sharpness, Mirror, Smart Light, Defective Pixel Correction | Brightness, Sharpness, Mirror, Smart Light, Defective Pixel Correction | Brightness, Sharpness, Mirror, Smart Light, Defective Pixel Correction | Brightness, Contrast, Mirror, Defective Pixel Correction, Sharpness, Anti-Banding, Smart Light | Brightness, Contrast, Mirror, Defective Pixel Correction, Sharpness, Anti-Banding, Smart Light |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 | IP67 | IP67 |
| Alarm I/O | - | 1 alarm out | 1 alarm out | 1 alarm out | 1 alarm out | 1 line out | 1 line out |
| Power | 12 VDC ± 25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ±25% | 12 VDC ± 25% | 12 VDC ± 25% |

Turbo HD Cameras


Special Series

Fisheye Cameras feature built-in microphones and are able to capture high quality images with wide angle. Pinhole cameras are applicable for ATM machine and have excellent night performance in environments with dim light.


- > 120 dB True WDR
- > Ultra-low-light night vision
- > EXIR 2.0
- > Built-in microphone



Fisheye

| Model | DS-2CC52H1T-FITS |
|-------------------|---|
| Image |  |
| Description | HD 5 MP IR Fisheye Camera |
| Lens | 1.1 mm |
| Min. Illumination | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| FOV | 186° |
| Angle Adjustment | Pan: 0°-30°; Tilt: 0°; Rotate: 0° |
| Day & Night | ICR |
| WDR | DWDR |
| Max. IR Range | Up to 20 m |
| HD Video Output | 1-ch BNC Output |
| CVBS Output | - |
| D/N Mode | Color/BW/AUTO |
| White Balance | - |
| BLC | - |
| DNR | 2D |
| Functions | Brightness, Contrast, Saturation |
| Protection Level | - |
| Alarm I/O | - |
| Power | 12 VDC±15% |

Pinhole

| Model | DS-2CS54C8T-PH | DS-2CS54D8T-PH |
|------------------------|---|---|
| Image |  |  |
| Description | 1 MP WDR Covert Camera | 2 MP WDR Covert Camera |
| Lens | 2.8 mm fixed focal lens | 3.7 mm fixed focal lens |
| Min. Illumination | Color: 0.005 Lux @ (F1.2, AGC ON) | Color: 0.005 Lux @ (F1.2, AGC ON) |
| FOV | 88.6° | 71.4° |
| Angle Adjustment | - | - |
| Day & Night | Electronic | Electronic |
| WDR | WDR | WDR |
| Max. IR Range (meters) | - | - |
| HD Video Output | 1 HD analog output/ * The adapter is required only when extending the cable. | 1 HD analog output/ * The adapter is required only when extending the cable. |
| CVBS Output | 1 CVBS output (75Ω/BNC) | 1 CVBS output (75Ω/BNC) |
| D/N Mode | Auto/Color/BW (Black and White) | Auto/Color/BW (Black and White) |
| White Balance | ATW/MANUAL | ATW/MANUAL |
| BLC | WDR/BLC/WDR | WDR/BLC/WDR |
| DNR | 3D DNR | 3D DNR |
| Functions | Contrast, Brightness, Sharpness, Mirror | Contrast, Brightness, Sharpness, Mirror |
| Protection Level | - | - |
| Alarm I/O | - | - |
| Power | 12 V DC ±20% | 12 V DC ±20% |

Turbo HD PTZ Cameras

045 AE7

046 AE5

047 AE4



Turbo HD PTZ Cameras

More Options, Better Compatibility

Turbo HD PTZ Cameras capture high quality images even in poorly lit environments. With the embedded CMOS chip, WDR and real-time 1920 x 1080 resolution becomes possible. The speed domes feature wide compatibility thanks to the 4-in-1 video output.







- > Up to 1920 x 1080 resolution
- > 4-in-1 video output: 1 BNC, 4 switchable video outputs for TVI / AHD / CVI / CVBS
- > Minimum illumination
 - Color: 0.005 lux @ F1.6
 - AGC on B/W: 0.001 lux @ F1.6
 - AGC on IR: 0 lux
- > 120 dB WDR
- > More options for zoom ratio – 32x / 25x / 15x









AE7

| Model | DS-2AE7225TI-A | DS-2AE7232TI-A |
|--------------------------|---|---|
| Image | | |
| Description | 1/2.8" HD progressive scan CMOS 1920 x 1080 resolution 25x optical zoom, 16x digital zoom 120 dB true WDR (Wide Dynamic Range) Up to 150 m IR distance 3D intelligent positioning Switchable TVI/AHD/CVI/CVBS video outputs | 1/2.8" HD progressive scan CMOS 1920 x 1080 resolution 32x optical zoom, 16x digital zoom 120 dB true WDR (Wide Dynamic Range) Up to 150 m IR distance 3D intelligent positioning Switchable TVI/AHD/CVI/CVBS video outputs |
| Lens | 4.8 mm to 120 mm, 25x Optical | 4.8 mm to 153 mm, 32x Optical |
| Min. Illumination | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.2, AGC ON) |
| Angle Adjustment | 57.6° to 2.5° (wide-tele) | 54.2° to 1.97° (wide-tele) |
| Day & Night | ICR | ICR |
| WDR | ≥ 120 dB | ≥ 120 dB |
| Max. IR Range | Up to 150 m | Up to 150 m |
| HD Video Output | Switchable TVI/AHD/CVI/CVBS video output, (NTSC or PAL composite, BNC) | Switchable TVI/AHD/CVI/CVBS video output, (NTSC or PAL composite, BNC) |
| White Balance | AUTO/MANUAL/HAUTO/ATW/INDOOR/OUTDOOR | AUTO/MANUAL/HAUTO/ATW/INDOOR/OUTDOOR |
| BLC | Support | Support |
| 3D DNR | Support | Support |
| UTC Functions | UTC protocol (or HIKVISION-C protocol in previous DVR) | UTC protocol (or HIKVISION-C protocol in previous DVR) |
| Protection Level | IP66 standard (outdoor dome) TVS 4,000 V lightning protection, surge protection and voltage transient protection IK10 (excluding glass window) | IP66 standard (outdoor dome) TVS 4,000 V lightning protection, surge protection and voltage transient protection IK10 (excluding glass window) |
| Alarm I/O | - | - |
| Power | 24 VAC Max.: 40 W (Max. 14 W for IR) | 24 VAC Max.: 40 W (Max. 14 W for IR) |

Turbo HD Camera
PTZ Camera
DVRs
Encoder
Network Camera
PTZ Dome Camera
Panoramic Camera
NVR
KIT
Thermal Monitor
Switch
Cable
Controller & Transmission
PoCconnect
HiK-Accessories
DORI Distance

| Model | DS-2AE5225T-A | DS-2AE5232T-A | DS-2AE5225T-A3 | DS-2AE5232T-A3 | DS-2AE525TI-A | DS-2AE5232TI-A |
|-------------------|---|---|---|---|--|--|
| Image |  |  |  |  |  |  |
| Description | 1/2.8" HD progressive scan CMOS 1920 × 1080 resolution 25× optical zoom, 16× digital zoom 120 dB true WDR (Wide Dynamic Range) 3D intelligent positioning Switchable TVI/AHD/CVI/CVBS video outputs | 1/2.8" HD progressive scan CMOS 1920 × 1080 resolution 32× optical zoom, 16× digital zoom 120 dB true WDR (Wide Dynamic Range) 3D intelligent positioning Switchable TVI/AHD/CVI/CVBS video outputs | 1/2.8" HD progressive scan CMOS 1920 × 1080 resolution 25× optical zoom, 16× digital zoom 120 dB true WDR (Wide Dynamic Range) 3D intelligent positioning Switchable TVI/AHD/CVI/CVBS video outputs | 1/2.8" HD progressive scan CMOS 1920 × 1080 resolution 32× optical zoom, 16× digital zoom 120 dB true WDR (Wide Dynamic Range) 3D intelligent positioning Switchable TVI/AHD/CVI/CVBS video outputs | 1/2.8" HD progressive scan CMOS 1920 × 1080 resolution 25× optical zoom, 16× digital zoom 120 dB true WDR (Wide Dynamic Range) Up to 150 m IR distance 3D intelligent positioning Switchable TVI/AHD/CVI/CVBS video outputs | 1/2.8" HD progressive scan CMOS 1920 × 1080 resolution 32× optical zoom, 16× digital zoom 120 dB true WDR (Wide Dynamic Range) Up to 150 m IR distance 3D intelligent positioning Switchable TVI/AHD/CVI/CVBS video outputs |
| Lens | 4.8 mm to 120 mm, 25× Optical | 4.8 mm to 153 mm, 32× Optical | 4.8 mm to 120 mm, 25× Optical | 4.8 mm to 153 mm, 32× Optical | 4.8 mm to 120 mm, 25× Optical | 4.8 mm to 153 mm, 32× Optical |
| Min. Illumination | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.2, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.2, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.2, AGC ON) |
| Angle Adjustment | 57.6° to 2.5° (wide-tele) | 55.6° to 2.04° (wide-tele) | 57.6° to 2.5° (wide-tele) | 55.6° to 2.04° (wide-tele) | 57.6° to 2.5° (wide to tele) | 55.6° to 2.04° (wide to tele) |
| Day & Night | ICR | ICR | ICR | ICR | ICR | ICR |
| WDR | ≥ 120 dB | ≥ 120 dB | ≥ 120 dB | ≥ 120 dB | ≥ 120 dB | ≥ 120 dB |
| Max. IR Range | - | - | - | - | Up to 150 m | Up to 150 m |
| HD Video Output | Switchable TVI/AHD/CVI/CVBS video output, (NTSC or PAL composite, BNC) | Switchable TVI/AHD/CVI/CVBS video output, (NTSC or PAL composite, BNC) | Switchable TVI/AHD/CVI/CVBS video output, (NTSC or PAL composite, BNC) | Switchable TVI/AHD/CVI/CVBS video output, (NTSC or PAL composite, BNC) | Switchable TVI/AHD/CVI/CVBS video output, (NTSC or PAL composite, BNC) | Switchable TVI/AHD/CVI/CVBS video output, (NTSC or PAL composite, BNC) |
| White Balance | AUTO/MANUAL/HAUTO/ATW/INDOOR/OUTDOOR | AUTO/MANUAL/HAUTO/ATW/INDOOR/OUTDOOR | AUTO/MANUAL/HAUTO/ATW/INDOOR/OUTDOOR | AUTO/MANUAL/HAUTO/ATW/INDOOR/OUTDOOR | AUTO/MANUAL/HAUTO/ATW/INDOOR/OUTDOOR | AUTO/MANUAL/HAUTO/ATW/INDOOR/OUTDOOR |
| BLC | Support | Support | Support | Support | Support | Support |
| 3D DNR | Support | Support | Support | Support | Support | Support |
| UTC Functions | UTC protocol (or HIKVISION-C protocol in previous DVR) | UTC protocol (or HIKVISION-C protocol in previous DVR) | UTC protocol (or HIKVISION-C protocol in previous DVR) | UTC protocol (or HIKVISION-C protocol in previous DVR) | UTC protocol (or HIKVISION-C protocol in previous DVR) | UTC protocol (or HIKVISION-C protocol in previous DVR) |
| Protection Level | IP66 standard (outdoor dome) TVS 4,000 V lightning protection, surge protection and voltage transient protection, IK10 | IP66 standard (outdoor dome) TVS 4,000 V lightning protection, surge protection and voltage transient protection, IK10 | TVS 4,000 V lightning protection, surge protection and voltage transient protection | TVS 4,000 V lightning protection, surge protection and voltage transient protection | IP66 standard (outdoor dome) TVS 4,000 V lightning protection, surge protection and voltage transient protection | IP66 standard (outdoor dome) TVS 4,000 V lightning protection, surge protection and voltage transient protection |
| Alarm I/O | 2/1 | 2/1 | 2/1 | 2/1 | 2/1 | 2/1 |
| Power | 24 VAC Max.: 24 W | 24 VAC Max.: 24 W | 24 VAC Max.: 18 W | 24 VAC Max.: 18 W | 24 VAC Max.: 30 W (Max. 10 W for IR) | 24 VAC Max.: 30 W (Max. 10 W for IR) |

| Model | DS-2AE4215T-D | DS-2AE4225T-D | DS-2AE4215T-D3 | DS-2AE4225T-D3 | DS-2AE4215TI-D | DS-2AE4225TI-D |
|-------------------|--|--|--|---|--|---|
| Image |  |  |  |  |  |  |
| Description | 1/2.8" HD progressive scan CMOS 1920 × 1080 15 × optical zoom, 16× digital zoom 120 dB true WDR (Wide Dynamic Range) 3D intelligent positioning Switchable TVI/AHD/CVI/CVBS video outputs | 1/2.8" HD progressive scan CMOS 1920 × 1080 resolution 25× optical zoom, 16× digital zoom 120 dB true WDR (Wide Dynamic Range) 3D intelligent positioning Switchable TVI/AHD/CVI/CVBS video outputs | 1/2.8" HD progressive scan CMOS 1920 × 1080 15 × optical zoom, 16× digital zoom 120 dB true WDR (Wide Dynamic Range) 3D intelligent positioning Switchable TVI/AHD/CVI/CVBS video outputs | 1/2.8" HD progressive scan CMOS 1920 × 1080 resolution 25 × optical zoom, 16× digital zoom 120 dB true WDR (Wide Dynamic Range) 3D intelligent positioning Switchable TVI/AHD/CVI/CVBS video outputs | 1/2.8" HD progressive scan CMOS 1920 × 1080 resolution 15× optical zoom, 16× digital zoom 120 dB True WDR (Wide Dynamic Range) Up to 100 m IR distance 3D intelligent positioning Switchable Turbo HD and CVBS outputs | 1/2.8" HD progressive scan CMOS 1920 × 1080 resolution 25× optical zoom, 120 dB true WDR (Wide Dynamic Range) Up to 100 m IR distance 3D intelligent positioning Switchable TVI/AHD/CVI/CVBS video outputs |
| Lens | 5 mm to 75 mm, 15× Optical | 4.8 mm to 120 mm, 25× Optical | 5 mm to 75 mm, 15× Optical | 4.8 mm to 120 mm, 25× Optical | 5 mm to 75 mm, 15× Optical | 4.8 mm to 120 mm, 25× Optical |
| Min. Illumination | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) |
| Angle Adjustment | 53.8° to 4.0° (wide-tele) | 57.6° to 2.5° (wide-tele) | 53.8° to 4.0° (wide-tele) | 57.6° to 2.5° (wide-tele) | 53.8° to 4.0° (wide-tele) | 57.6° to 2.5° (wide-tele) |
| Day & Night | ICR | ICR | ICR | ICR | ICR | ICR |
| WDR | ≥ 120 dB | ≥ 120 dB | ≥ 120 dB | ≥ 120 dB | ≥ 120 dB | ≥ 120 dB |
| Max. IR Range | - | - | - | - | Up to 100 m | Up to 100 m |
| HD Video Output | Switchable TVI/AHD/CVI/CVBS video output, (NTSC or PAL composite, BNC) | Switchable TVI/AHD/CVI/CVBS video output, (NTSC or PAL composite, BNC) | Switchable TVI/AHD/CVI/CVBS video output, (NTSC or PAL composite, BNC) | Switchable TVI/AHD/CVI/CVBS video output, (NTSC or PAL composite, BNC) | Switchable TVI/AHD/CVI/CVBS video output, (NTSC or PAL composite, BNC) | Switchable TVI/AHD/CVI/CVBS video output, (NTSC or PAL composite, BNC) |
| White Balance | AUTO/MANUAL/HAUTO/ATW/INDOOR/OUTDOOR | AUTO/MANUAL/HAUTO/ATW/INDOOR/OUTDOOR | AUTO/MANUAL/HAUTO/ATW/INDOOR/OUTDOOR | AUTO/MANUAL/HAUTO/ATW/INDOOR/OUTDOOR | AUTO/MANUAL/HAUTO/ATW/INDOOR/OUTDOOR | AUTO/MANUAL/HAUTO/ATW/INDOOR/OUTDOOR |
| BLC | Support | Support | Support | Support | Support | Support |
| 3D DNR | Support | Support | Support | Support | Support | Support |
| UTC Functions | UTC protocol (or HIKVISION-C protocol in previous DVR) | UTC protocol (or HIKVISION-C protocol in previous DVR) | UTC protocol (or HIKVISION-C protocol in previous DVR) | UTC protocol (or HIKVISION-C protocol in previous DVR) | UTC protocol (or HIKVISION-C protocol in previous DVR) | UTC protocol (or HIKVISION-C protocol in previous DVR) |
| Protection Level | IP66 standard (outdoor dome) TVS 4,000 V lightning protection, surge protection and voltage transient protection | IP66 standard (outdoor dome) TVS 4,000 V lightning protection, surge protection and voltage transient protection | TVS 4,000 V lightning protection, surge protection and voltage transient protection | TVS 4,000 V lightning protection, surge protection and voltage transient protection | IP66 standard (outdoor dome) TVS 4,000 V lightning protection, surge protection and voltage transient protection | IP66 standard (outdoor dome) TVS 4,000 V lightning protection, surge protection and voltage transient protection |
| Alarm I/O | 2/1 | 2/1 | 2/1 | 2/1 | - | - |
| Power | 12 VDC Max.: 16 W | 12 VDC Max.: 16 W | 12 VDC Max.: 12 W | 12 VDC Max.: 12 W | 12 VDC Max.: 20 W (Max. 7 W for IR) | 12 VDC Max.: 20 W (Max. 7 W for IR) |

DVR

049 Hikvision AcuSense Series

054 Ultra Series

058 Pro Series

064 Value Series

067 Special Series








Turbo HD DVRs






Hikvision AcuSense Series

Based on deep learning technology, Hikvision's AcuSense DVRs have the ability to recognize and extract human body and vehicle targets. This way, the AcuSense DVRs achieve high-accuracy alarm functionality as well as rapid retrieval of past video clips based on human or vehicle classifications. These intelligent features liberate users from time-consuming browsing and searching.

- > AcuSense Technology powered by deep-learning algorithm
- > Motion Detection 2.0 with human & vehicle classification for all analog channels
- > Facial comparison
- > Search human and vehicle targets quickly
- > Ultra HD, compatible with cameras of up to 4K resolution
- > H.265 Pro+ / H.265 Pro / H.265
- > Audio over coaxial
- > Adaptive signal input (five types: HDTV / AHD / CVI / CVBS / IP)
- > Enhanced network camera access capability



| Model | IDS-7204HQHI-M1/S | IDS-7208HQHI-M1/S | IDS-7208HQHI-M2/S | IDS-7216HQHI-M1/S | IDS-7216HQHI-M2/S |
|---------------------|--|--|--|--|--|
| Image |  Turbo HD 5.0 |  Turbo HD 5.0 |  Turbo HD 5.0 |  Turbo HD 5.0 |  Turbo HD 5.0 |
| Video Compression | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 |
| Analog Video Input | 4-ch | 8-ch | 8-ch | 16-ch | 8-ch |
| IP Video Input | 1-ch (up to 5-ch) IP enhanced mode on: 2-ch (up to 6-ch), each up to 4 Mbps | 2-ch (up to 10-ch) IP enhanced mode on: 4-ch (up to 12-ch), each up to 4 Mbps | 2-ch (up to 10-ch) IP enhanced mode on: 4-ch (up to 12-ch), each up to 4 Mbps | 2-ch (up to 18-ch) IP enhanced mode on: 8-ch (up to 24-ch), each up to 4 Mbps | 2-ch (up to 18-ch) IP enhanced mode on: 8-ch (up to 24-ch), each up to 4 Mbps |
| Audio Input | 1-ch, RCA (2.0 Vp-p, 1 KΩ) 4-ch via coaxial cable | 1-ch, RCA (2.0 Vp-p, 1 KΩ) 8-ch via coaxial cable | 1-ch, RCA (2.0 Vp-p, 1 KΩ) 8-ch via coaxial cable | 1-ch, RCA (2.0 Vp-p, 1 KΩ) 16-ch via coaxial cable | 1-ch, RCA (2.0 Vp-p, 1 KΩ) 16-ch via coaxial cable |
| HDMI / VGA Output | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, |
| HDMI2 Output | - | - | - | - | - |
| CVBS Output | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 |
| Audio Output | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) |
| Encoding Capability | Main stream: When 1080p lite mode not enabled: For 4 MP stream access: 4 MP lite@15 fps; 1080p lite/720p/WD1/4CIF/ VGA/CIF@25 fps (P)/30 fps (N) For 3 MP stream access: 3 MP/1080p/720p/ VGA/WD1/4CIF/CIF@15 fps For 1080p stream access: 1080p/720p@15 fps; VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) For 720p stream access: 720p/VGA/ WD1/4CIF/CIF@25 fps (P)/30 fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15 fps; 1080p lite/720p lite/ VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF@12 fps; CIF@25 fps (P)/30 fps (N) | Main stream: When 1080p lite mode not enabled: For 4 MP stream access: 4 MP lite@15 fps; 1080p lite/720p/WD1/4CIF/ VGA/CIF@25 fps (P)/30 fps (N) For 3 MP stream access: 3 MP/1080p/720p/ VGA/WD1/4CIF/CIF@15 fps For 1080p stream access: 1080p/720p@15 fps; VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) For 720p stream access: 720p/VGA/ WD1/4CIF/CIF@25 fps (P)/30 fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15 fps; 1080p lite/720p lite/ VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF@12 fps; CIF@25 fps (P)/30 fps (N) | Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15 fps; 1080p lite/720p/WD1/4CIF/ VGA/CIF@25 fps (P)/30 fps (N) For 3 MP stream access: 3 MP/1080p/720p/ VGA/WD1/4CIF/CIF@15 fps For 1080p stream access: 1080p/720p@15 fps; VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) For 720p stream access: 720p/VGA/ WD1/4CIF/CIF@25 fps (P)/30 fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15 fps; 1080p lite/720p lite/ VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF@12 fps; CIF@25 fps (P)/30 fps (N) | Main stream: When 1080p lite mode not enabled: For 4 MP stream access: 4 MP lite@15 fps; 1080p lite/720p/WD1/4CIF/ VGA/CIF@25 fps (P)/30 fps (N) For 3 MP stream access: 3 MP/1080p/720p/ VGA/WD1/4CIF/CIF@15 fps For 1080p stream access: 1080p/720p@15 fps; VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) For 720p stream access: 720p/VGA/ WD1/4CIF/CIF@25 fps (P)/30 fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15 fps; 1080p lite/720p lite/ VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF@12 fps; CIF@25 fps (P)/30 fps (N) | Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15 fps; 1080p lite/720p/WD1/4CIF/ VGA/CIF@25 fps (P)/30 fps (N) For 3 MP stream access: 3 MP/1080p/720p/ VGA/WD1/4CIF/CIF@15 fps For 1080p stream access: 1080p/720p@15 fps; VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) For 720p stream access: 720p/VGA/ WD1/4CIF/CIF@25 fps (P)/30 fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15 fps; 1080p lite/720p lite/ VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF@12 fps; CIF@25 fps (P)/30 fps (N) |
| SATA Capacity | 1 SATA interface, up to 10 TB capacity for each disk | 1 SATA interface, up to 10 TB capacity for each disk | 2 SATA interfaces, up to 10 TB capacity for each disk | 1 SATA interface, up to 10 TB capacity for each disk | 2 SATA interfaces, up to 10 TB capacity for each disk |
| Network Interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface |
| Serial Interface | RS-485 (half-duplex) | RS-485 (half-duplex) | RS-485 (half-duplex) | RS-485 (half-duplex) | RS-485 (half-duplex) |
| USB Port | 2 × USB 2.0 | 2 × USB 2.0 | 2 × USB 2.0 | 1 × USB 2.0 1 × USB 3.0 | 1 × USB 2.0 1 × USB 3.0 |
| Smart Function | 1. Human body & vehicle recognition 2 Motion2.0:all channels 3. VCA: Line crossing, Intrusion detection, up to 2-ch | 1. Human body & vehicle recognition 2 Motion2.0:all channels 3. VCA: Line crossing, Intrusion detection, up to 4-ch | 1. Human body & vehicle recognition 2 Motion2.0:all channels 3. VCA: Line crossing, Intrusion detection, up to 4-ch | 1. Human body & vehicle recognition 2 Motion2.0:all channels 3. VCA: Line crossing, Intrusion detection, up to 4-ch | 1. Human body & vehicle recognition 2 Motion2.0:all channels 3. VCA: Line crossing, Intrusion detection, up to 4-ch |
| Alarm I/O | - | - | - | - | - |
| Power | 12 VDC | 12 VDC | 12 VDC | 12 VDC | 12 VDC |
| Chassis | 1U (315mm) | 1U (315mm) | 1U (380mm) | 1U (315mm) | 1U (380mm) |

| Model | IDS-7204HQHI-M1/FA | IDS-7208HQHI-M1/FA | IDS-7208HQHI-M2/FA | IDS-7216HQHI-M1/FA | IDS-7216HQHI-M2/FA |
|----------------------------|---|---|---|---|---|
| Image |  Turbo HD 5.0 |  Turbo HD 5.0 |  Turbo HD 5.0 |  Turbo HD 5.0 |  Turbo HD 5.0 |
| Video Compression | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 |
| Analog Video Input | 4-ch | 8-ch | 8-ch | 16-ch | 16-ch |
| IP Video Input | 1-ch (up to 5-ch) IP enhanced mode on: 2-ch (up to 6-ch), each up to 4 Mbps | 2-ch (up to 10-ch) IP enhanced mode on: 4-ch (up to 12-ch), each up to 4 Mbps | 2-ch (up to 10-ch) IP enhanced mode on: 4-ch (up to 12-ch), each up to 4 Mbps | 2-ch (up to 18-ch) IP enhanced mode on: 8-ch (up to 24-ch), each up to 4 Mbps | 2-ch (up to 18-ch) IP enhanced mode on: 8-ch (up to 24-ch), each up to 4 Mbps |
| Audio Input | 1-ch, RCA (2.0 Vp-p, 1 KΩ) 4-ch via coaxial cable | 1-ch, RCA (2.0 Vp-p, 1 KΩ) 8-ch via coaxial cable | 1-ch, RCA (2.0 Vp-p, 1 KΩ) 8-ch via coaxial cable | 1-ch, RCA (2.0 Vp-p, 1 KΩ) 16-ch via coaxial cable | 1-ch, RCA (2.0 Vp-p, 1 KΩ) 16-ch via coaxial cable |
| HDMI / VGA Output | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, |
| HDMI2 Output | - | - | - | - | - |
| CVBS Output | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 |
| Audio Output | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) |
| Encoding Capability | Main stream: When 1080p lite mode not enabled: For 4 MP stream access: 4 MP lite@15 fps; 1080p lite/720p/ WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) For 3 MP stream access: 3 MP/1080p/720p/ VGA/WD1/4CIF/CIF@15 fps For 1080p stream access: 1080p/720p@15 fps; VGA/WD1/4CIF/ CIF@25 fps (P)/30 fps (N) For 720p stream access: 720p/VGA/ WD1/4CIF/CIF@25 fps (P)/30 fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15 fps; 1080p lite/720p lite/ VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF@12 fps; CIF@25 fps (P)/30 fps (N) | Main stream: When 1080p lite mode not enabled: For 4 MP stream access: 4 MP lite@15 fps; 1080p lite/720p/ WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) For 3 MP stream access: 3 MP/1080p/720p/ VGA/WD1/4CIF/CIF@15 fps For 1080p stream access: 1080p/720p@15 fps; VGA/WD1/4CIF/ CIF@25 fps (P)/30 fps (N) For 720p stream access: 720p/VGA/ WD1/4CIF/CIF@25 fps (P)/30 fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15 fps; 1080p lite/720p lite/ VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF@12 fps; CIF@25 fps (P)/30 fps (N) | Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15 fps; 1080p lite/720p/ WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) For 3 MP stream access: 3 MP/1080p/720p/ VGA/WD1/4CIF/CIF@15 fps For 1080p stream access: 1080p/720p@15 fps; VGA/WD1/4CIF/ CIF@25 fps (P)/30 fps (N) For 720p stream access: 720p/VGA/ WD1/4CIF/CIF@25 fps (P)/30 fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15 fps; 1080p lite/720p lite/ VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF@12 fps; CIF@25 fps (P)/30 fps (N) | Main stream: When 1080p lite mode not enabled: For 4 MP stream access: 4 MP lite@15 fps; 1080p lite/720p/ WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) For 3 MP stream access: 3 MP/1080p/720p/ VGA/WD1/4CIF/CIF@15 fps For 1080p stream access: 1080p/720p@15 fps; VGA/WD1/4CIF/ CIF@25 fps (P)/30 fps (N) For 720p stream access: 720p/VGA/ WD1/4CIF/CIF@25 fps (P)/30 fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15 fps; 1080p lite/720p lite/ VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF@12 fps; CIF@25 fps (P)/30 fps (N) | Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15 fps; 1080p lite/720p/ WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) For 3 MP stream access: 3 MP/1080p/720p/ VGA/WD1/4CIF/CIF@15 fps For 1080p stream access: 1080p/720p@15 fps; VGA/WD1/4CIF/ CIF@25 fps (P)/30 fps (N) For 720p stream access: 720p/VGA/ WD1/4CIF/CIF@25 fps (P)/30 fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15 fps; 1080p lite/720p lite/ VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF@12 fps; CIF@25 fps (P)/30 fps (N) |
| SATA Capacity | 1 SATA interface, up to 10 TB capacity for each disk | 1 SATA interface, up to 10 TB capacity for each disk | 2 SATA interfaces, up to 10 TB capacity for each disk | 1 SATA interface, up to 10 TB capacity for each disk | 2 SATA interfaces, up to 10 TB capacity for each disk |
| Network Interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface |
| Serial Interface | RS-485 (half-duplex) | RS-485 (half-duplex) | RS-485 (half-duplex) | RS-485 (half-duplex) | RS-485 (half-duplex) |
| USB Port | 2 × USB 2.0 | 2 × USB 2.0 | 2 × USB 2.0 | 1 × USB 2.0 1 × USB 3.0 | 1 × USB 2.0 1 × USB 3.0 |
| Smart Function | 1. 1-ch face picture comparasion and face picture search 2. Human body & vehicle recognitionz 2 Motion2.0:all channels 3. VCA: Line crossing, Intrusion detection,up to 2-ch | 1. 1-ch face picture comparasion and face picture search 2. Human body & vehicle recognitionz 2 Motion2.0:all channels 3. VCA: Line crossing, Intrusion detection,up to 2-ch | 1. 1-ch face picture comparasion and face picture search 2. Human body & vehicle recognitionz 2 Motion2.0:all channels 3. VCA: Line crossing, Intrusion detection,up to 2-ch | 1. 1-ch face picture comparasion and face picture search 2. Human body & vehicle recognitionz 2 Motion2.0:all channels 3. VCA: Line crossing, Intrusion detection,up to 2-ch | 1. 1-ch face picture comparasion and face picture search 2. Human body & vehicle recognitionz 2 Motion2.0:all channels 3. VCA: Line crossing, Intrusion detection,up to 2-ch |
| Alarm I/O | - | - | - | - | - |
| Power | 12 VDC | 12 VDC | 12 VDC | 12 VDC | 12 VDC |
| Chassis | 1U (315mm) | 1U (315mm) | 1U (380mm) | 1U (315mm) | 1U (380mm) |

| Model | IDS-7204HUHI-M1/S | IDS-7204HUHI-M2/S | IDS-7208HUHI-M1/S | IDS-7208HUHI-M2/S |
|---------------------|--|--|--|--|
| Image |  Turbo HD 5.0 |  Turbo HD 5.0 |  Turbo HD 5.0 |  Turbo HD 5.0 |
| Video Compression | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 |
| Analog Video Input | 4-ch | 4-ch | 4-ch | 4-ch |
| IP Video Input | 2-ch (up to 6-ch) IP enhanced mode on: 4-ch (up to 8-ch), each up to 4 Mbps | 2-ch (up to 6-ch) IP enhanced mode on: 4-ch (up to 8-ch), each up to 4 Mbps | 4-ch (up to 12-ch) IP enhanced mode on: 8-ch (up to 16-ch), each up to 4 Mbps | 4-ch (up to 12-ch) IP enhanced mode on: 8-ch (up to 16-ch), each up to 4 Mbps |
| Audio Input | 1-ch, RCA (2.0 Vp-p, 1 KΩ) | 1-ch, RCA (2.0 Vp-p, 1 KΩ) | 1-ch, RCA (2.0 Vp-p, 1 KΩ) | 1-ch, RCA (2.0 Vp-p, 1 KΩ) |
| HDMI / VGA Output | 1-ch, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI/VGA simultaneous output | 1-ch, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI/VGA simultaneous output | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI/VGA simultaneous output | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI/VGA simultaneous output |
| HDMI2 Output | - | - | - | - |
| CVBS Output | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 |
| Audio Output | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) |
| Encoding Capability | Main stream: 8 MP@8 fps/5 MP@12 fps/4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF/CIF@25 fps (P)/30 fps (N) | Main stream: 8 MP@8 fps/5 MP@12 fps/4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF/CIF@25 fps (P)/30 fps (N) | Main stream: 8 MP@8 fps/5 MP@12 fps/ 4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF/CIF@25 fps (P)/30 fps (N) | Main stream: 8 MP@8 fps/5 MP@12 fps/ 4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF/CIF@25 fps (P)/30 fps (N) |
| SATA Capacity | 1 SATA interface Up to 10 TB capacity for each disk | 2 SATA interface Up to 10 TB capacity for each disk | 1 SATA interface Up to 10 TB capacity for each disk | 2 SATA interface Up to 10 TB capacity for each disk |
| Network Interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface |
| Serial Interface | RS-485 (half-duplex) | RS-485 (half-duplex) | RS-485 (half-duplex) | RS-485 (half-duplex) |
| USB Port | 2 × USB 2.0 | 2 × USB 2.0 | 1 × USB 2.0 1 × USB 3.0 | 1 × USB 2.0 1 × USB 3.0 |
| Smart Function | 1. Human body & vehicle recognition 2 Motion2.0:all channels 3. VCA: Line crossing, Intrusion detection, up to 4-ch | 1. Human body & vehicle recognition 2 Motion2.0:all channels 3. VCA: Line crossing, Intrusion detection, up to 4-ch | 1. Human body & vehicle recognition 2 Motion2.0:all channels 3. VCA: Line crossing, Intrusion detection, up to 4-ch | 1. Human body & vehicle recognition 2 Motion2.0:all channels 3. VCA: Line crossing, Intrusion detection, up to 4-ch |
| Alarm I/O | - | - | - | - |
| Power | 12 VDC | 12 VDC | 12 VDC | 12 VDC |
| Chassis | 1U (315mm) | 1U (380mm) | 1U (315mm) | 1U (380mm) |

| Model | IDS-7204HUHI-M1/FA | IDS-7204HUHI-M2/FA | IDS-7208HUHI-M1/FA | IDS-7208HUHI-M2/FA |
|---------------------|---|---|---|---|
| Image |  Turbo HD 5.0 |  Turbo HD 5.0 |  Turbo HD 5.0 |  Turbo HD 5.0 |
| Video Compression | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 |
| Analog Video Input | 4-ch | 4-ch | 4-ch | 4-ch |
| IP Video Input | 2-ch (up to 6-ch) IP enhanced mode on: 4-ch (up to 8-ch), each up to 4 Mbps | 2-ch (up to 6-ch) IP enhanced mode on: 4-ch (up to 8-ch), each up to 4 Mbps | 4-ch (up to 12-ch) IP enhanced mode on: 8-ch (up to 16-ch), each up to 4 Mbps | 4-ch (up to 12-ch) IP enhanced mode on: 8-ch (up to 16-ch), each up to 4 Mbps |
| Audio Input | 1-ch, RCA (2.0 Vp-p, 1 KΩ) 16-ch via coaxial cable | 1-ch, RCA (2.0 Vp-p, 1 KΩ) 16-ch via coaxial cable | 1-ch, RCA (2.0 Vp-p, 1 KΩ) 16-ch via coaxial cable | 1-ch, RCA (2.0 Vp-p, 1 KΩ) 16-ch via coaxial cable |
| HDMI / VGA Output | 1-ch, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI/VGA simultaneous output | 1-ch, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI/VGA simultaneous output | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI/VGA simultaneous output | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI/VGA simultaneous output |
| HDMI2 Output | - | - | - | - |
| CVBS Output | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 |
| Audio Output | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) |
| Encoding Capability | Main stream: 8 MP@8 fps/5 MP@12 fps/4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF/CIF@25 fps (P)/30 fps (N) | Main stream: 8 MP@8 fps/5 MP@12 fps/4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF/CIF@25 fps (P)/30 fps (N) | Main stream: 8 MP@8 fps/5 MP@12 fps/ 4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF/CIF@25 fps (P)/30 fps (N) | Main stream: 8 MP@8 fps/5 MP@12 fps/ 4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF/CIF@25 fps (P)/30 fps (N) |
| SATA Capacity | 1 SATA interface Up to 10 TB capacity for each disk | 2 SATA interface Up to 10 TB capacity for each disk | 1 SATA interface Up to 10 TB capacity for each disk | 2 SATA interface Up to 10 TB capacity for each disk |
| Network Interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface |
| Serial Interface | RS-485 (half-duplex) | RS-485 (half-duplex) | RS-485 (half-duplex) | RS-485 (half-duplex) |
| USB Port | 2 × USB 2.0 | 2 × USB 2.0 | 1 × USB 2.0 1 × USB 3.0 | 1 × USB 2.0 1 × USB 3.0 |
| Smart Function | 1.1-ch face picture comparison and face picture search 2. Human body & vehicle recognition 3 Motion2.0:all channels 4. VCA: Line crossing, Intrusion detection, up to 4-ch | 1.1-ch face picture comparison and face picture search 2. Human body & vehicle recognition 3 Motion2.0:all channels 4. VCA: Line crossing, Intrusion detection, up to 4-ch | 1.1-ch face picture comparison and face picture search 2. Human body & vehicle recognition 3 Motion2.0:all channels 4. VCA: Line crossing, Intrusion detection, up to 4-ch | 1.1-ch face picture comparison and face picture search 2. Human body & vehicle recognition 3 Motion2.0:all channels 4. VCA: Line crossing, Intrusion detection, up to 4-ch |
| Alarm I/O | - | - | - | - |
| Power | 12 VDC | 12 VDC | 12 VDC | 12 VDC |
| Chassis | 1U (315mm) | 1U (380mm) | 1U (380mm) | 1U (380mm) |

Turbo HD DVRs


Ultra Series

With excellent performance, the Ultra Series DVRs can accommodate up to 32 channels of analog cameras. Ultra Series DVRs have strong hybrid access capability. The 8 SATA interfaces are useful for users who require larger storage space.



- › Ultra HD, compatible with cameras of up to 4K resolution
- › H.265 Pro+ / H.265 Pro / H.265
- › Adaptive signal input (five types: HDTVI / AHD / CVI / CVBS / IP)
- › Enhanced network camera access capability
- › Line crossing detection / intrusion detection / sudden scene change detection





| Model | DS-8108HQHI-K8 | DS-8116HQHI-K8 | DS-8124HQHI-K8 | DS-8132HQHI-K8 |
|--------------------------|---|---|---|---|
| Image |  -HOT |  -HOT |  |  -HOT |
| Video Compression | H.265Pro+/H.265Pro/H.265/H.264+/H.264 | H.265Pro+/H.265Pro/H.265/H.264+/H.264 | H.265Pro+/H.265Pro/H.265/H.264+/H.264 | H.265Pro+/H.265Pro/H.265/H.264+/H.264 |
| Analog Video-Audio Input | 8-ch | 16-ch | 24-ch | 32-ch |
| IP Video Input | 4-ch (Up to 12-ch), Up to 6 MP | 8-ch (Up to 24-ch), Up to 6 MP | 16-ch (Up to 40-ch), Up to 6 MP | 16-ch (Up to 48-ch), Up to 6 MP |
| Audio Input | 8-ch, RCA (2.0 Vp-p, 1 KΩ) | 16-ch, RCA (2.0 Vp-p, 1 KΩ) | 16-ch, RCA (2.0 Vp-p, 1 KΩ) | 16-ch, RCA (2.0 Vp-p, 1 KΩ) |
| HDMI / VGA Output | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| HDMI2 Output | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| CVBS Output | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 |
| Audio Output | 2-ch, RCA (Linear, 1 KΩ) | 2-ch, RCA (Linear, 1 KΩ) | 2-ch, RCA (Linear, 1 KΩ) | 2-ch, RCA (Linear, 1 KΩ) |
| Encoding Capability | <p>Main stream:</p> <p>When 1080p Lite mode not enabled:</p> <p>For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>For 3 MP stream access: 3 MP/1080p/720p/WD1/4CIF/VGA/CIF@15fps</p> <p>For 1080p stream access: 1080p/720p@15fps; 720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>For 720p stream access: 720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>When 1080p Lite mode enabled:</p> <p>For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p lite/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>For 3 MP stream access: 3 MP/1080p lite/720p lite/WD1/4CIF/VGA/CIF@15fps</p> <p>For 1080p stream access: 1080p lite/720p lite/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>For 720p stream access: 720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>Sub-stream:</p> <p>WD1/4CIF@12fps; CIF@25fps (PI)/30fps (N)</p> | <p>Main stream:</p> <p>When 1080p Lite mode not enabled:</p> <p>For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>For 3 MP stream access: 3 MP/1080p/720p/WD1/4CIF/VGA/CIF@15fps</p> <p>For 1080p stream access: 1080p/720p@15fps; 720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>For 720p stream access: 720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>When 1080p Lite mode enabled:</p> <p>For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p lite/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>For 3 MP stream access: 3 MP/1080p lite/720p lite/WD1/4CIF/VGA/CIF@15fps</p> <p>For 1080p stream access: 1080p lite/720p lite/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>For 720p stream access: 720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>Sub-stream:</p> <p>WD1/4CIF@12fps; CIF@25fps (PI)/30fps (N)</p> | <p>Main stream:</p> <p>When 1080p Lite mode not enabled:</p> <p>For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>For 3 MP stream access: 3 MP/1080p/720p/WD1/4CIF/VGA/CIF@15fps</p> <p>For 1080p stream access: 1080p/720p@15fps; 720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>For 720p stream access: 720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>When 1080p Lite mode enabled:</p> <p>For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p lite/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>For 3 MP stream access: 3 MP/1080p lite/720p lite/WD1/4CIF/VGA/CIF@15fps</p> <p>For 1080p stream access: 1080p lite/720p lite/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>For 720p stream access: 720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>Sub-stream:</p> <p>WD1/4CIF@12fps; CIF@25fps (PI)/30fps (N)</p> | <p>Main stream:</p> <p>When 1080p Lite mode not enabled:</p> <p>For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>For 3 MP stream access: 3 MP/1080p/720p/WD1/4CIF/VGA/CIF@15fps</p> <p>For 1080p stream access: 1080p/720p@15fps; 720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>For 720p stream access: 720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>When 1080p Lite mode enabled:</p> <p>For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p lite/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>For 3 MP stream access: 3 MP/1080p lite/720p lite/WD1/4CIF/VGA/CIF@15fps</p> <p>For 1080p stream access: 1080p lite/720p lite/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>For 720p stream access: 720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N)</p> <p>Sub-stream:</p> <p>WD1/4CIF@12fps; CIF@25fps (PI)/30fps (N)</p> |
| SATA Capacity | 8 SATA interfaces Up to 10 TB capacity for each disk | 8 SATA interfaces Up to 10 TB capacity for each disk | 8 SATA interfaces Up to 10 TB capacity for each disk | 8 SATA interfaces Up to 10 TB capacity for each disk |
| Array Type | - | - | - | - |
| Network Interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface |
| Serial Interface | RS-232, RS-485 (full-duplex), Keyboard | RS-232, RS-485 (full-duplex), Keyboard | RS-232, RS-485 (full-duplex), Keyboard | RS-232, RS-485 (full-duplex), Keyboard |
| USB Port | 2 × USB 2.0, 1 × USB 3.0 | 2 × USB 2.0, 1 × USB 3.0 | 2 × USB 2.0, 1 × USB 3.0 | 2 × USB 2.0, 1 × USB 3.0 |
| Smart Function | VCA (Line Crossing, Intrusion Detection) up to 4-ch | VCA (Line Crossing, Intrusion Detection) up to 4-ch | VCA (Line Crossing, Intrusion Detection) up to 4-ch | VCA (Line Crossing, Intrusion Detection) up to 4-ch |
| Alarm I/O | 16/8 | 16/8 | 16/8 | 16/8 |
| Power | 100 to 240 VAC | 100 to 240 VAC | 100 to 240 VAC | 100 to 240 VAC |
| Chassis | 2U | 2U | 2U | 2U |

| Model | DS-8108HUHI-K8 | DS-8116HUHI-K8 | DS-8124HUHI-K8 | DS-8132HUHI-K8 | DS-9008HUHI-K8 | DS-9016HUHI-K8 |
|--------------------------|--|--|--|--|--|--|
| Image |  |  |  |  |  |  |
| Video Compression | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 |
| Analog Video-Audio Input | 8-ch | 16-ch | 24-ch | 32-ch | 8-ch | 16-ch |
| IP Video Input | 8-ch (Up to 16-ch), Up to 8 MP | 16-ch (Up to 32-ch), Up to 8MP | 16-ch (Up to 40-ch), Up to 8MP | 16-ch (Up to 48-ch), Up to 8MP | 10-ch (Up to 18-ch), Up to 12MP | 18-ch (Up to 34-ch), Up to 12MP |
| Audio Input | 8ch, RCA (2.0 Vp-p, 1 KΩ) | 16-ch, RCA (2.0 Vp-p, 1 KΩ) | 16-ch, RCA (2.0 Vp-p, 1 KΩ) | 16-ch, RCA (2.0 Vp-p, 1 KΩ) | 8-ch, RCA (2.0 Vp-p, 1 KΩ) | 16-ch, RCA (2.0 Vp-p, 1 KΩ) |
| HDMI / VGA Output | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| HDMI2 Output | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| CVBS Output | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 |
| Audio Output | 2-ch, RCA (Linear, 1 KΩ) | 2-ch, RCA (Linear, 1 KΩ) | 2-ch, RCA (Linear, 1 KΩ) | 2-ch, RCA (Linear, 1 KΩ) | 2-ch, RCA (Linear, 1KΩ) | 2-ch, RCA (Linear, 1KΩ) |
| Encoding Capability | Main stream: 8 MP@8fps; 5 MP@12fps; 4 MP@15fps; 3 MP@18fps; 1080p/720p/WD1/4CIF/VGA/ CIF@25fps (PI)/30fps (NI) Sub-stream: WD1/4CIF/CIF@25fps (PI)/30fps (NI) | Main stream: 8 MP@8fps; 5 MP@12fps; 4 MP@15fps; 3 MP@18fps; 1080p/720p/WD1/4CIF/VGA/ CIF@25fps (PI)/30fps (NI) Sub-stream: WD1/4CIF/CIF@25fps (PI)/30fps (NI) | Main stream: 8 MP@8fps; 5 MP@12fps; 4 MP@15fps; 3 MP@18fps; 1080p/720p/WD1/4CIF/VGA/ CIF@25fps (PI)/30fps (NI) Sub-stream: WD1/4CIF/CIF@25fps (PI)/30fps (NI) | Main stream: 8 MP@8fps; 5 MP@12fps; 4 MP@15fps; 3 MP@18fps; 1080p/720p/WD1/4CIF/VGA/ CIF@25fps (PI)/30fps (NI) Sub-stream: WD1/4CIF/CIF@25fps (PI)/30fps (NI) | Main stream: 8 MP@8fps; 5 MP@12fps; 4 MP@15fps; 3 MP@18fps; 1080p/720p/WD1/4CIF/VGA/ CIF@25fps (PI)/30fps (NI) Sub-stream: WD1/4CIF/CIF@25fps (PI)/30fps (NI) | Main stream: 8 MP@8fps; 5 MP@12fps; 4 MP@15fps; 3 MP@18fps; 1080p/720p/WD1/4CIF/VGA/ CIF@25fps (PI)/30fps (NI) Sub-stream: WD1/4CIF/CIF@25fps (PI)/30fps (NI) |
| SATA Capacity | 8 SATA interface Up to 10 TB capacity for each disk | 8SATA interface Up to 10 TB capacity for each disk | 8 SATA interfaces Up to 10 TB capacity for each disk | 8 SATA interfaces Up to 10 TB capacity for each disk | 8 SATA interfaces Up to 10 TB capacity for each disk | 8 SATA interfaces Up to 10 TB capacity for each disk |
| Array Type | RAID 0, RAID 1, RAID 5, RAID 6, RAID 10 | RAID 0, RAID 1, RAID 5, RAID 6, RAID 10 | RAID 0, RAID 1, RAID 5, RAID 6, RAID 10 | RAID 0, RAID 1, RAID 5, RAID 6, RAID 10 | RAID 0, RAID 1, RAID 5, RAID 6, RAID 10 | RAID 0, RAID 1, RAID 5, RAID 6, RAID 10 |
| Network Interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface |
| Serial Interface | RS-232, RS-485 (full-duplex), Keyboard | RS-232, RS-485 (full-duplex), Keyboard | RS-232, RS-485 (full-duplex), Keyboard | RS-232, RS-485 (full-duplex), Keyboard | RS-232, RS-485 (full-duplex), Keyboard | RS-232, RS-485 (full-duplex), Keyboard |
| USB Port | 2 × USB 2.0, 1 × USB 3.0 | 2 × USB 2.0, 1 × USB 3.0 | 2 × USB 2.0, 1 × USB 3.0 | 2 × USB 2.0, 1 × USB 3.0 | 2 × USB 2.0, 1 × USB 3.0 | 2 × USB 2.0, 1 × USB 3.0 |
| Smart Function | VCA (Line Crossing, Intrusion Detection) all channels | VCA (Line Crossing, Intrusion Detection) all channels | VCA (Line Crossing, Intrusion Detection) all channels | VCA (Line Crossing, Intrusion Detection) all channels | VCA (Line Crossing, Intrusion Detection) all channels | VCA (Line Crossing, Intrusion Detection) all channels |
| Alarm I/O | 16/4 | 16/4 | 16/8 | 16/8 | 16/8 | 16/8 |
| Power | 100 to 240 VAC | 100 to 240 VAC | 100 to 240 VAC | 100 to 240 VAC | 100 to 240 VAC | 100 to 240 VAC |
| Chassis | 2U | 2U | 2U | 2U | 2U | 2U |

HOT

| Model | DS-9024HUHI-K8 | DS-9032HUHI-K8 |
|--------------------------|---|--|
| Image |  |  HOT |
| Video Compression | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 |
| Analog Video-Audio Input | 24-ch | 32-ch |
| IP Video Input | 24-ch (Up to 48-ch), Up to 12MP | 32-ch (Up to 64-ch), Up to 12MP |
| Audio Input | 16-ch, RCA (2.0 Vp-p, 1 KΩ) | 16-ch, RCA (2.0 Vp-p, 1 KΩ) |
| HDMI / VGA Output | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| HDMI2 Output | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| CVBS Output | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 |
| Audio Output | 2-ch, RCA (Linear, 1 KΩ) | 2-ch, RCA (Linear, 1 KΩ) |
| Encoding Capability | Main stream: 8MP@8fps; 5 MP@12fps; 4 MP@15fps; 3 MP@18fps; 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N) | Main stream: 8MP@8fps; 5 MP@12fps; 4 MP@15fps; 3 MP@18fps; 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N) |
| SATA Capacity | 8 SATA interfaces Up to 10 TB capacity for each disk | 8 SATA interfaces Up to 10 TB capacity for each disk |
| Array Type | RAID 0, RAID 1, RAID 5, RAID 6, RAID 10 | RAID 0, RAID 1, RAID 5, RAID 6, RAID 10 |
| Network Interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface |
| Serial Interface | RS-232, RS-485 (full-duplex), Keyboard | RS-232, RS-485 (full-duplex), Keyboard |
| USB Port | 2 × USB 2.0, 1 × USB 3.0 | 2 × USB 2.0, 1 × USB 3.0 |
| Smart Function | VCA (Line Crossing, Intrusion Detection) all channels | VCA (Line Crossing, Intrusion Detection) all channels |
| Alarm I/O | 16/8 | 16/8 |
| Power | 100 to 240 VAC | 100 to 240 VAC |
| Chassis | 2U | 2U |

| Model | DS-8116HTHI-K8 | DS-9016HTHI-K8 |
|--------------------------|---|---|
| Image |  HOT |  HOT |
| Video Compression | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 |
| Analog Video-Audio Input | 16-ch | 16-ch |
| IP Video Input | 16-ch (Up to 32-ch), Up to 8 MP | 18-ch (Up to 34-ch), Up to 12 MP resolution |
| Audio Input | 16-ch, RCA (2.0 Vp-p, 1 KΩ) | 16-ch, RCA (2.0 Vp-p, 1 KΩ) |
| HDMI / VGA Output | 2-ch, RCA (Linear, 1 KΩ) | 2-ch, RCA (Linear, 1 KΩ) |
| HDMI2 Output | 1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz | 1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz |
| CVBS Output | 1-ch, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz | 1-ch, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz |
| Audio Output | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 |
| Encoding Capability | Main stream: 8 MP@12 fps / 5 MP@20 fps; 3 MP@18fps; 4 MP / 1080p / 720p / WD1 / 4CIF / VGA / CIF@25fps (P)/30fps (N) Sub-stream: WD1 / 4CIF / CIF@25fps (P) / 30fps (N) | Main stream: 8 MP@12 fps / 5 MP@20 fps; 3 MP@18fps; 4 MP / 1080p / 720p / WD1 / 4CIF / VGA / CIF@25fps (P)/30fps (N) Sub-stream: WD1 / 4CIF / CIF@25fps (P) / 30fps (N) |
| SATA Capacity | 8 SATA interfaces Up to 10 TB capacity for each disk | 8 SATA interfaces Up to 10 TB capacity for each disk |
| Array Type | RAID 0, RAID1, RAID5, RAID6, RAID10 | RAID 0, RAID1, RAID5, RAID6, RAID10 |
| Network Interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface |
| Serial Interface | RS-232, RS-485 (full-duplex), Keyboard | RS-232, RS-485 (full-duplex), Keyboard |
| USB Port | 2 × USB 2.0, 1 × USB 3.0 | 2 × USB 2.0, 1 × USB 3.0 |
| Smart Function | VCA (Line Crossing, Intrusion Detection) all channels | VCA (Line Crossing, Intrusion Detection) all channels |
| Alarm I/O | 16/4 | 16/8 |
| Power | 100 to 240 VAC | 100 to 240 VAC |
| Chassis | 2U | 2U |

Turbo HD DVRs

Pro Series

Pro Series DVRs support HD videos, H.265 / H.265 Pro+ encoding technology, 4K resolution output, power over coax (PoC), various VCA rules, and more.






- > Ultra HD, compatible with cameras of up to 4K resolution
- > H.265 Pro+ / H.265 Pro / H.265
- > Adaptive signal input (five types: HDTV / AHD / CVI / CVBS / IP)
- > Enhanced network camera access capability
- > Line crossing detection / intrusion detection / sudden scene change detection
- > Audio over coaxial
- > PoC for easy installation 5-in-1 devices



| Model | DS-7204HQHI-K1/P | DS-7208HQHI-K2/P | DS-7216HQHI-K2/P | DS-7224HQHI-K2 | DS-7232HQHI-K2 |
|---------------------|---|---|---|---|---|
| Image |  PoC |  PoC |  PoC |  |  |
| Video Compression | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 |
| Analog Video Input | 4-ch | 8-ch | 16-ch | 24-ch | 32-ch |
| IP Video Input | 2-ch(Up to 6-ch), Up to 6 MP resolution | 4-ch(Up to 12-ch), Up to 6 MP resolution | 8-ch(Up to 24-ch), Up to 6 MP resolution | 8-ch(Up to 32-ch), Up to 6 MP resolution | 8-ch(Up to 40-ch), Up to 6 MP resolution |
| Audio Input | 1-ch, RCA (2.0 Vp-p, 1 KΩ) | 1-ch, RCA (2.0 Vp-p, 1 KΩ) | 1-ch, RCA (2.0 Vp-p, 1 KΩ) | 1-ch, RCA (2.0 Vp-p, 1 KΩ) | 1-ch, RCA (2.0 Vp-p, 1 KΩ) |
| HDMI / VGA Output | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| HDMI2 Output | - | - | - | - | - |
| CVBS Output | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 |
| Audio Output | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) |
| Encoding Capability | Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N) For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@15fps For 1080p stream access: 1080p@15fps; 720p/VGA/WD1/4CIF/CIF@25fps (PI)/30fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (PI)/30fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15fps; 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (PI)/30fps (N) Sub-stream: WD1/4CIF@12fps; CIF@25fps (PI)/30fps (N) | Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N) For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@15fps For 1080p stream access: 1080p@15fps; 720p/VGA/WD1/4CIF/CIF@25fps (PI)/30fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (PI)/30fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15fps; 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (PI)/30fps (N) Sub-stream: WD1/4CIF@12fps; CIF@25fps (PI)/30fps (N) | Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N) For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@15fps For 1080p stream access: 1080p@15fps; 720p/VGA/WD1/4CIF/CIF@25fps (PI)/30fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (PI)/30fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15fps; 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (PI)/30fps (N) Sub-stream: WD1/4CIF@12fps; CIF@25fps (PI)/30fps (N) | Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N) For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@15fps For 1080p stream access: 1080p@15fps; 720p/VGA/WD1/4CIF/CIF@25fps (PI)/30fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (PI)/30fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15fps; 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (PI)/30fps (N) Sub-stream: WD1/4CIF@12fps; CIF@25fps (PI)/30fps (N) | Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N) For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@15fps For 1080p stream access: 1080p@15fps; 720p/VGA/WD1/4CIF/CIF@25fps (PI)/30fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (PI)/30fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15fps; 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (PI)/30fps (N) Sub-stream: WD1/4CIF@12fps; CIF@25fps (PI)/30fps (N) |
| SATA Capacity | 1 SATA interface Up to 10TB capacity for each disk | 2 SATA interfaces Up to 10TB capacity for each disk | 2 SATA interfaces Up to 10TB capacity for each disk | 2 SATA interfaces Up to 10TB capacity for each disk | 2 SATA interfaces Up to 10TB capacity for each disk |
| Array Type | - | - | - | - | - |
| Network Interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface |
| Serial Interface | RS-485 (half-duplex) | RS-485 (half-duplex) | RS-485 (half-duplex) | RS-485 (half-duplex) | RS-485 (half-duplex) |
| USB Port | 2 × USB 2.0 | 2 × USB 2.0 | 1 × USB 2.0 1 × USB 3.0 | 1 × USB 2.0 1 × USB 3.0 | 1 × USB 2.0 1 × USB 3.0 |
| Smart Function | VCA (Line Crossing, Intrusion Detection) up to 4-ch | VCA (Line Crossing, Intrusion Detection) up to 4-ch | VCA (Line Crossing, Intrusion Detection) up to 4-ch | VCA (Line Crossing, Intrusion Detection) up to 4-ch | VCA (Line Crossing, Intrusion Detection) up to 4-ch |
| Alarm I/O | - | - | - | - | - |
| Power | 48 VDC | 48 VDC | 48 VDC | 12 VDC | 12 VDC |
| Chassis | 1U (315mm) | 1U (380mm) | 1U (380mm) | 1U (380mm) | 1U (380mm) |

| Model | DS-7304HQHI-K4 | DS-7308HQHI-K4 | DS-7316HQHI-K4 | DS-7324HQHI-K4 | DS-7332HQHI-K4 |
|---------------------|--|--|--|--|--|
| Image |  |  |  |  |  |
| Video Compression | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 |
| Analog Video Input | 4-ch | 8-ch | 16-ch | 24-ch | 32-ch |
| IP Video Input | 2-ch (Up to 6-ch), Up to 6 MP resolution | 4-ch (up to 12-ch), Up to 6 MP resolution | 8-ch (Up to 24-ch), Up to 6 MP resolution | 16-ch (Up to 48-ch), Up to 6 MP resolution | 16-ch (Up to 48-ch), Up to 6 MP resolution |
| Audio Input | 4-ch, RCA (2.0 Vp-p, 1 KΩ) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) |
| HDMI / VGA Output | VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| HDMI2 Output | - | - | - | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| CVBS Output | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 |
| Audio Output | 2-ch, RCA (Linear, 1KΩ) | 2-ch, RCA (Linear, 1KΩ) | 2-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) |
| Encoding Capability | Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@15fps For 1080p stream access: 1080p@15fps; 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15fps; 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF@12fps; CIF@25fps (P)/30fps (N) | Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@15fps For 1080p stream access: 1080p@15fps; 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15fps; 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF@12fps; CIF@25fps (P)/30fps (N) | Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@15fps For 1080p stream access: 1080p@15fps; 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15fps; 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF@12fps; CIF@25fps (P)/30fps (N) | Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 3 MP stream access: 3 MP/1080p/720p/WD1/4CIF/VGA/CIF@15fps For 1080p stream access: 1080p/720p@15fps; 720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 720p stream access: 720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) When 1080p Lite mode enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p lite/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 3 MP stream access: 3 MP/1080p lite/720p lite/WD1/4CIF/VGA/CIF@15fps For 1080p stream access: 1080p lite/720p lite/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 720p stream access: 720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF@12fps; CIF@25fps (P)/30fps (N) | Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 3 MP stream access: 3 MP/1080p/720p/WD1/4CIF/VGA/CIF@15fps For 1080p stream access: 1080p/720p@15fps; 720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 720p stream access: 720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) When 1080p Lite mode enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p lite/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 3 MP stream access: 3 MP/1080p lite/720p lite/WD1/4CIF/VGA/CIF@15fps For 1080p stream access: 1080p lite/720p lite/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 720p stream access: 720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF@12fps; CIF@25fps (P)/30fps (N) |
| SATA Capacity | 4 SATA interface Up to 10 TB capacity for each disk | 4 SATA interface Up to 10 TB capacity for each disk | 4 SATA interface Up to 10 TB capacity for each disk | 4 SATA interface Up to 10 TB capacity for each disk | 4 SATA interface Up to 10 TB capacity for each disk |
| Array Type | - | - | - | - | - |
| Network Interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface |
| Serial Interface | RS-232, RS-485 (full-duplex), Keyboard | RS-232, RS-485 (full-duplex), Keyboard | RS-232, RS-485 (full-duplex), Keyboard | RS-232, RS-485 (full-duplex), Keyboard | RS-232, RS-485 (full-duplex), Keyboard |
| USB Port | 1 × USB 2.0 1 × USB 3.0 | 1 × USB 2.0 1 × USB 3.0 | 1 × USB 2.0 1 × USB 3.0 | 1 × USB 2.0 1 × USB 3.0 | 1 × USB 2.0 1 × USB 3.0 |
| Smart Function | VCA (Line Crossing, Intrusion Detection) up to 4-ch | VCA (Line Crossing, Intrusion Detection) up to 4-ch | VCA (Line Crossing, Intrusion Detection) up to 4-ch | VCA (Line Crossing, Intrusion Detection) up to 4-ch | VCA (Line Crossing, Intrusion Detection) up to 4-ch |
| Alarm I/O | 16/4 | 16/4 | 16/4 | 16/4 | 16/4 |
| Power | 100 to 240 VAC | 100 to 240 VAC | 100 to 240 VAC | 100 to 240 VAC | 100 to 240 VAC |
| Chassis | 1.5U | 1.5U | 1.5U | 1.5U | 1.5U |

| Model | DS-7216HUHI-K2 | DS-7204HUHI-K1/P | DS-7208HUHI-K2/P | DS-7216HUHI-K2/P |
|--------------------------|---|--|---|---|
| Image |  Coaxial Audio |  PoC |  PoC |  PoC |
| Video Compression | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 |
| Analog Video-Audio Input | 16-ch, Coaxial video-audio | 4-ch | 8-ch | 16-ch |
| IP Video Input | 16-ch (Up to 32-ch), Up to 8 MP resolution | 4-ch (Up to 8-ch), Up to 8 MP resolution | 8-ch (Up to 16-ch), Up to 8 MP resolution | 16-ch (Up to 32-ch), Up to 8 MP resolution |
| Audio Input | 4-ch, RCA (2.0 Vp-p, 1 KΩ) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) |
| HDMI / VGA Output | VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| HDMI2 Output | - | - | - | - |
| CVBS Output | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 |
| Audio Output | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) |
| Encoding Capability | Main stream: When 8 MP Lite mode is not enabled: 8 MP@8fps/5MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) *: 8 MP@8fps is only available for channel 1 of DS-7204HUHI-K2. When 8 MP Lite mode enabled: 8 MP Lite/3MP/1080P/720P/WD1/4CIF/VGA/CIF@15fps *: 8 MP Lite is only available for DS-7204HUHI-K2. Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N) | Main stream: 5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N) | Main stream: 8 MP@8fps/5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N) | Main stream: 8 MP@8fps/5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N) |
| SATA Capacity | 2 SATA interface Up to 10 TB capacity for each disk | 1 SATA interface Up to 10 TB capacity for each disk | 2 SATA interface Up to 10 TB capacity for each disk | 2 SATA interface Up to 10 TB capacity for each disk |
| Array Type | - | - | - | - |
| Network Interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface |
| Serial Interface | RS-485 (half-duplex) | RS-485 (half-duplex) | RS-485 (half-duplex) | RS-485 (half-duplex) |
| USB Port | 1 × USB 2.0 1 × USB 3.0 | 2 × USB 2.0 | 1 × USB 2.0 1 × USB 3.0 | 1 × USB 2.0 1 × USB 3.0 |
| Smart Function | VCA (Line Crossing, Intrusion Detection) up to all channels | VCA (Line Crossing, Intrusion Detection) up to all channels | VCA (Line Crossing, Intrusion Detection) up to all channels | VCA (Line Crossing, Intrusion Detection) up to all channels |
| Alarm I/O | 16/4 | 4/1 | 8/4 | 4/1 |
| Power | 12 VDC | 48 VDC | 48 VDC | 100 to 240 VAC |
| Chassis | 1U (380mm) | 1U (315mm) | 1U (380mm) | 1U (380mm) |

| Model | DS-7304HUHI-K4 | DS-7308HUHI-K4 | DS-7316HUHI-K4 | DS-7324HUHI-K4 | DS-7332HUHI-K4 |
|--------------------------|--|--|--|---|---|
| Image |  |  |  HOT |  |  HOT |
| Video Compression | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 | H.265+ / H.265 / H.264+ / H.264 | H.265+ / H.265 / H.264+ / H.264 |
| Analog Video-Audio Input | 4-ch | 8-ch | 16-ch | 24-ch | 32-ch |
| IP Video Input | 4-ch (Up to 8-ch), Up to 8 MP resolution | 8-ch (Up to 16-ch), Up to 8 MP resolution | 16-ch (Up to 32-ch), Up to 8 MP resolution | 16-ch (Up to 40-ch), Up to 8 MP resolution | 16-ch (Up to 48-ch), Up to 8 MP resolution |
| Audio Input | 4-ch, RCA (2.0 Vp-p, 1 KΩ) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) (independent) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) |
| HDMI / VGA Output | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| HDMI2 Output | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| CVBS Output | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 |
| Audio Output | 2-ch, RCA (Linear, 1KΩ) | 2-ch, RCA (Linear, 1KΩ) | 2-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) |
| Encoding Capability | Main stream: 8 MP@8fps/5 MP@12fps; 4 MP@ 15fps; 3 MP@18fps; 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N) | Main stream: 8 MP@8fps/5 MP@12fps; 4 MP@ 15fps; 3 MP@18fps; 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N) | Main stream: 8 MP@8fps/5 MP@12fps; 4 MP@ 15fps; 3 MP@18fps; 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N) | Main stream: 8MP@8fps; 5 MP@12fps; 4 MP@15fps; 3 MP@18fps; 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N) | Main stream: 8MP@8fps; 5 MP@12fps; 4 MP@15fps; 3 MP@18fps; 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N) |
| SATA Capacity | 4 SATA interface Up to 10 TB capacity for each disk | 4 SATA interface Up to 10 TB capacity for each disk | 4 SATA interface Up to 10 TB capacity for each disk | 4 SATA interface Up to 10 TB capacity for each disk | 4 SATA interface Up to 10 TB capacity for each disk |
| Array Type | RAID 0, RAID 1, RAID 5, RAID 6, RAID 10 | RAID 0, RAID 1, RAID 5, RAID 6, RAID 10 | RAID 0, RAID 1, RAID 5, RAID 6, RAID 10 | RAID 0, RAID 1, RAID 5, RAID 6, RAID 10 | RAID 0, RAID 1, RAID 5, RAID 6, RAID 10 |
| Network Interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface |
| Serial Interface | RS-232, RS-485 (full-duplex), Keyboard | RS-232, RS-485 (full-duplex), Keyboard | RS-232, RS-485 (full-duplex), Keyboard | RS-232, RS-485 (full-duplex), Keyboard | RS-232, RS-485 (full-duplex), Keyboard |
| USB Port | 2 × USB 2.0 1 × USB 3.0 | 2 × USB 2.0 1 × USB 3.0 | 2 × USB 2.0 1 × USB 3.0 | 2 × USB 2.0 1 × USB 3.0 | 2 × USB 2.0 1 × USB 3.0 |
| Smart Function | VCA (Line Crossing, Intrusion Detection) all channels | VCA (Line Crossing, Intrusion Detection) all channels | VCA (Line Crossing, Intrusion Detection) all channels | VCA (Line Crossing, Intrusion Detection) all channels | VCA (Line Crossing, Intrusion Detection) all channels |
| Alarm I/O | 16/4 | 16/4 | 16/4 | 16/4 | 16/4 |
| Power | 100 to 240 VAC | 100 to 240 VAC | 100 to 240 VAC | 100 to 240 VAC | 100 to 240 VAC |
| Chassis | 1.5U | 1.5U | 1.5U | 1.5U | 1.5U |

| Model | DS-7204HTHI-K1 | DS-7204HTHI-K2 | DS-7208HTHI-K2 | DS-7316HTHI-K4 |
|--------------------------|---|---|---|--|
| Image |  Coaxial Audio |  Coaxial Audio |  Coaxial Audio |  HOT |
| Video Compression | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 |
| Analog Video-Audio Input | 4-ch, Coaxial video-audio | 4-ch, Coaxial video-audio | 8-ch, Coaxial video-audio | 16-ch |
| IP Video Input | 4-ch (Up to 8-ch), Up to 8 MP resolution | 4-ch (Up to 8-ch), Up to 8 MP resolution | 8-ch (Up to 16-ch), Up to 8 MP resolution | 16-ch (Up to 32-ch), Up to 8 MP |
| Audio Input | 4-ch, RCA (2.0 Vp-p, 1 KΩ) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) |
| HDMI / VGA Output | VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz |
| HDMI2 Output | - | - | - | 1-ch, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz |
| CVBS Output | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 |
| Audio Output | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 2-ch, RCA (Linear, 1 KΩ) |
| Encoding Capability | Main stream: 8 MP@15fps, 5 MP@20fps, 3 MP@18fps 4 MP/1080p/720p/WD1/4CIF/VGA/CIF@25fps (PI/30fps(N)) Sub-stream: WD1/4CIF/CIF@25fps (PI/30fps (N)) | Main stream: 8 MP@15fps, 5 MP@20fps, 3 MP@18fps 4 MP/1080p/720p/WD1/4CIF/VGA/CIF@25fps (PI/30fps(N)) Sub-stream: WD1/4CIF/CIF@25fps (PI/30fps (N)) | Main stream: 8 MP@15fps, 5 MP@20fps, 3 MP@18fps 4 MP/1080p/720p/WD1/4CIF/VGA/CIF@25fps (PI/30fps(N)) Sub-stream: WD1/4CIF/CIF@25fps (PI/30fps (N)) | Main stream: 8 MP@12 fps/5 MP@20 fps; 3 MP@18fps; 4 MP/1080p/720p/WD1/4CIF/VGA/CIF@25fps (PI/30fps(N)) Sub-stream: WD1/4CIF/CIF@25fps (PI/30fps (N)) |
| SATA Capacity | 1 SATA interfaces Up to 10 TB capacity for each disk | 2SATA interfaces Up to 10 TB capacity for each disk | 2 SATA interfaces Up to 10 TB capacity for each disk | 4 SATA interfaces Up to 10 TB capacity for each disk |
| Array Type | - | - | - | RAID 0,RAID1,RAIDS,RAID6,RAID10 |
| Network Interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 2, RJ45 10M/100M/1000M self-adaptive Ethernet interface |
| Serial Interface | RS-485 (half-duplex) | RS-485 (half-duplex) | RS-485 (half-duplex) | RS-232, RS-485 (full-duplex), Keyboard |
| USB Port | 1 × USB 2.0 1 × USB 3.0 | 1 × USB 2.0 1 × USB 3.0 | 1 × USB 2.0 1 × USB 3.0 | 2 × USB 2.0 1 × USB 3.0 |
| Smart Function | VCA (Line Crossing, Intrusion Detection) all channels | VCA (Line Crossing, Intrusion Detection) all channels | VCA (Line Crossing, Intrusion Detection) all channels | VCA (Line Crossing, Intrusion Detection) all channels |
| Alarm I/O | 4/1 | 4/1 | 8/4 | 16/4 |
| Power | 12 VDC | 12 VDC | 12 VDC | 100 to 240 VAC |
| Chassis | 1U (315mm) | 1U (380mm) | 1U (380mm) | 1.5U |




Turbo HD DVRs

Value Series




Value Series DVRs offer cost-effective high quality video security solution. The Value Series DVRs deliver high quality video monitoring with H.265 Pro+ and H.265 Pro compression technology, up to 5 MP ultra HD encoding ability and great durability.

- › Ultra HD, compatible with cameras of up to 5 MP resolution
- › Adaptive signal input (five types: HDTV / AHD / CVI / CVBS / IP)
- › H.265 Pro+ / H.265 Pro / H.265
- › Enhanced network camera access capability



| Model | DS-7104HGHI-K1 | DS-7108HGHI-K1 | DS-7116HGHI-K1 |
|--------------------------|---|---|--|
| Image |  Coaxial Audio |  Coaxial Audio |  Coaxial Audio |
| Video Compression | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 |
| Analog Video-Audio Input | 4-ch | 8-ch | 16-ch |
| IP Video Input | 1-ch (up to 5-ch), Up to 1080p | 2-ch (up to 10ch), Up to 5 MP | 2-ch (up to 18-ch), Up to 5 MP |
| Audio Input | 1-ch, RCA (2.0 Vp-p, 1 KΩ) 4-ch via coaxial cable | 1-ch, RCA (2.0 Vp-p, 1 KΩ) 8-ch via coaxial cable | 1-ch, RCA (2.0 Vp-p, 1 KΩ) 16-ch via coaxial cable |
| HDMI / VGA Output | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI/VGA simultaneous output |
| Audio Output | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1 KΩ) |
| Encoding Capability | Main stream: When 1080p Lite mode not enabled: For 720p stream access: 720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) When 1080p Lite mode enabled: 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: 2CIF@6fps; CIF/QVGA/QCIF@ 25fps (P)/30fps (N) | Main stream: When 1080p lite mode enabled: 1080p lite/HD 720p lite/WD1/4CIF/VGA@12fps; CIF@25fps (P)/30fps (N) When 1080p lite mode not enabled: For 720p stream access: 720p/WD1/4CIF/VGA@12fps; CIF@25fps (P)/30fps (N) For SD stream access: WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: CIF/QVGA/QCIF@25fps (P)/30fps (N) | Main stream: For 1080p stream access: 1080p lite/720p lite/WD1/4CIF/VGA@15 fps; CIF@25 fps (P)/30 fps (N) For 720p stream access: 720p/WD1/4CIF/VGA@15 fps; CIF@ 25fps (P)/30 fps (N) For standard definition stream access: WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) Sub-stream: For 1080p and 720p stream access: CIF/QVGA@15 fps For standard definition stream access: CIF/QVGA@25 fps (P)/30 fps (N) |
| SATA Capacity | 1 SATA interface Up to 6TB capacity for each disk | 1 SATA interface Up to 6TB capacity for each disk | 1 SATA interface Up to 10TB capacity for each disk |
| Network Interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M self-adaptive Ethernet interface |
| Serial Interface | - | - | - |
| USB Port | 2 × USB 2.0 | 2 × USB 2.0 | 2 × USB 2.0 |
| Alarm I/O | - | - | - |
| Power | 12 VDC | 12 VDC | 12 VDC |
| Chassis | Mini 1U (200mm) | Mini 1U (200mm) | Mini 1U (285mm) |

HD 1080p

| Model | DS-7104HQHI-K1 | DS-7108HQHI-K1 | DS-7116HQHI-K1 |
|---------------------------------|---|---|---|
| Image |  HOT Coaxial Audio |  HOT Coaxial Audio |  HOT Coaxial Audio |
| Video Compression | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 |
| Analog Video-Audio Input | 4-ch, Coaxial video-audio | 8-ch, Coaxial video-audio | 16-ch, Coaxial video-audio |
| IP Video Input | 2-ch (Up to 6-ch), Up to 6 MP resolution | 4-ch (Up to 12-ch), Up to 6 MP resolution | 8-ch (Up to 24-ch), Up to 6 MP resolution |
| Audio Input | 1-ch, RCA (2.0 Vp-p, 1 KΩ) | 1-ch, RCA (2.0 Vp-p, 1 KΩ) | 1-ch, RCA (2.0 Vp-p, 1 KΩ) |
| HDMI / VGA Output | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| Audio Output | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) |
| Encoding Capability | Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@15fps For 1080p stream access: 1080p/720p@15fps; VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15fps; 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF@12fps; CIF@25fps (P)/30fps (N) | Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@15fps For 1080p stream access: 1080p/720p@15fps; VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15fps; 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF@12fps; CIF@25fps (P)/30fps (N) | Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@15fps For 1080p stream access: 1080p/720p@15fps; VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15fps; 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF@12fps; CIF@25fps (P)/30fps (N) |
| SATA Capacity | 1 SATA interface Up to 6 TB capacity for each disk | 1 SATA interface Up to 6 TB capacity for each disk | 1 SATA interface Up to 6 TB capacity for each disk |
| Network Interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface |
| Serial Interface | - | - | - |
| USB Port | 2 × USB 2.0 | 2 × USB 2.0 | 2 × USB 2.0 |
| Alarm I/O | - | - | - |
| Power | 12 VDC | 12 VDC | 12 VDC |
| Chassis | Mini 1U (200mm) | Mini 1U (200mm) | Mini 1U (285mm) |

5 MP

| Model | DS-7104HUHI-K1 | DS-7108HUHI-K1 |
|---------------------------------|--|--|
| Image |  Coaxial Audio |  Coaxial Audio |
| Video Compression | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 | H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264 |
| Analog Video-Audio Input | 4-ch, Coaxial video-audio | 8-ch, Coaxial video-audio |
| IP Video Input | 4-ch (Up to 8-ch), Up to 8 MP resolution | 8-ch (Up to 16-ch), Up to 8 MP resolution |
| Audio Input | 1-ch, RCA (2.0 Vp-p, 1 KΩ) | 1-ch, RCA (2.0 Vp-p, 1 KΩ) |
| HDMI / VGA Output | 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | VGA: 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI: 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| Audio Output | 1-ch, RCA (Linear, 1KΩ) | 1-ch, RCA (Linear, 1KΩ) |
| Encoding Capability | Main stream: When 8 MP Lite mode is not enabled: 8 MP@8 fps/5MP@12 fps/4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) *: 8 MP@8 fps is only available for channel 1 of DS-7104HUHI-K1. When 8 MP Lite mode enabled: 8 MP Lite/3MP/1080P/720P/WD1/4CIF/VGA/CIF@15 fps *: 8 MP Lite is only available for DS-7104HUHI-K1. Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N) | Main stream: When 8 MP Lite mode is not enabled: 8 MP@8 fps/5MP@12 fps/4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) *: 8 MP@8 fps is only available for channel 1 of DS-7104HUHI-K1. When 8 MP Lite mode enabled: 8 MP Lite/3MP/1080P/720P/WD1/4CIF/VGA/CIF@15 fps *: 8 MP Lite is only available for DS-7104HUHI-K1. Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N) |
| SATA Capacity | 1 SATA interface Up to 6TB capacity for each disk | 1 SATA interface Up to 6TB capacity for each disk |
| Network Interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface |
| Serial Interface | - | - |
| USB Port | 2 × USB 2.0 | 2 × USB 2.0 |
| Alarm I/O | - | - |
| Power | 12 VDC | 12 VDC |
| Chassis | Mini 1U (200mm) | Mini 1U (200mm) |

Turbo HD DVRs Special Series

Hikvision's banking-specific solution for ATM systems features devices that come equipped with smart analysis functions. These functions include multi-channel analyses based on preset rules to respond to specific behaviors in the immediate vicinity around ATM machines.

- > 1-ch human face mode and 1-ch panel mode for analog channels (IDS-7200AHQHI-M1)
- > Supports overlapping multiple ATM card numbers and multiple protocols (IDS-7200AHQHI-M1)
- > Supports triggering recording upon inserting an ATM card (IDS-7200AHQHI-M1)
- > Playback by inputting ATM card number, transaction amount, or transaction type (IDS-7200AHQHI-M1)
- > H.265 Pro+ / H.265 Pro / H.265
- > Deep learning algorithm
- > Multiple VCA events
- > Multi-channel smart analysis



ATM Seires

| Model | iDS-7204AHQHI-M1 |
|---------------------|--|
| Image | |
| Video Compression | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 |
| Analog Video Input | 4-ch |
| IP Video Input | Defaulted 0-ch; Up to 6-ch,6 MP resolution |
| Audio Input | 1-ch, RCA (2.0 Vp-p, 1 KΩ) |
| HDMI / VGA Output | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI/VGA simultaneous output |
| CVBS Output | BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 |
| Audio Output | 1-ch, RCA (Linear, 1 KΩ) |
| Encoding Capability | Main stream: When 1080p lite mode not enabled: For 4 MP stream access: 4 MP lite@15 fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) For 1080p stream access: 1080p/720p@15 fps; VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) When 1080p Lite mode enabled: 4 MP lite@15 fps; 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF@12 fps; CIF@25 fps (P)/30 fps (N) |
| SATA Capacity | 1 SATA interface Up to 8 TB capacity for each disk |
| Network Interface | 1, RJ45 10/100 Mbps self-adaptive Ethernet interface |
| Serial Interface | RS-232, RS-485 (full-duplex) |
| USB Port | 2 × USB 2.0 |
| Smart Function | <ul style="list-style-type: none"> l 1-ch human face mode and 1-ch panel mode for analog channel l Support overlapping the multiple ATM cards' number and multiple protocols l Support triggering recording once inserting the ATM card l Enabling/disabling the function of transaction information overlapping during playback and live view l Playback by inputting ATM card number, transaction amount or transaction type l Playback by smart ATM alarm |
| Alarm I/O | N/A |
| Power | 12 VDC, 1.5 A |
| Chassis | 315 × 242 × 45 mm |

Encoders

068 DVS





Encoders

Hikvision Encoder Servers allow the analog signal to be digitized and then stored on a hard drive or transmitted via network, capable of encoding at up to 4K resolution.

- > H.265+ / H.265
- > Ultra HD
- > Various network protocols



DVS

| Model | DS-6701HUHI | DS-6704HUHI | DS-6704HUHI-K | DS-6708HUHI-K | DS-6716HUHI-K |
|--------------------------------------|---|---|---|---|---|
| Image |  |  |  |  |  |
| Video Compression | H.265+ / H.265 / H.264+ / H.264 | H.265+ / H.265 / H.264+ / H.264 | H.265+ / H.265 / H.264+ / H.264 | H.265+ / H.265 / H.264+ / H.264 | H.265+ / H.265 / H.264+ / H.264 |
| Analog Video Input | 1-ch | 4-ch | 4-ch | 8-ch | 16-ch |
| Supported Analog Camera Types | HDTVI: 5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25 AHD: 1080p30, 1080p25, 720p30, 720p25 HDCVI: 1080p30, 1080p25, 720p30, 720p25 CVBS: PAL/NTSC | HDTVI: 5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25 AHD: 1080p30, 1080p25, 720p30, 720p25 HDCVI: 1080p30, 1080p25, 720p30, 720p25 CVBS: PAL/NTSC | HDTVI: 5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25 AHD: 5 MP, 4 MP, 1080p30, 1080p25, 720p30, 720p25 HDCVI: 4 MP, 1080p30, 1080p25, 720p30, 720p25 CVBS: PAL/NTSC | HDTVI: 8 MP, 5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25 AHD: 5 MP, 4 MP, 1080p30, 1080p25, 720p30, 720p25 HDCVI: 4 MP, 1080p30, 1080p25, 720p30, 720p25 CVBS: PAL/NTSC | HDTVI: 8 MP, 5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25 AHD: 5 MP, 4 MP, 1080p30, 1080p25, 720p30, 720p25 HDCVI: 4 MP, 1080p30, 1080p25, 720p30, 720p25 CVBS: PAL/NTSC |
| Audio Output | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) |
| Audio Input | 1-ch, 3.5mm interface (2.0 Vp-p, 1 kΩ) (LINE IN) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) |
| Encoding Capability | Main stream: 5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (PI)/30fps (N) | Main stream: 5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (PI)/30fps (N) | Main stream: 5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (PI)/30fps (N) | Main stream: 8 MP@8fps/5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (PI)/30fps (N) | Main stream: 8 MP@8fps/5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (PI)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (PI)/30fps (N) |
| Storage | 1 Micro SD card slot, supports Micro SD card 8G Up to 128 GB | 1 Micro SD card slot, supports Micro SD card 8G Up to 128 GB | 1 SATA interface Up to 8 TB capacity for each disk | 2 SATA interface Up to 8 TB capacity for each disk | 2 SATA interface Up to 8 TB capacity for each disk |
| Network Interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface |
| Serial Interface | RS-485 (half-duplex); RS-232 | RS-485 (half-duplex); RS-232 | RS-485 (half-duplex); RS-232 | RS-485 (half-duplex); RS-232 | RS-485 (half-duplex); RS-232 |
| Alarm I/O | 1/1 | 4/2 | 4/1 | 8/4 | 16/4 |
| Power | 12 VDC | 12 VDC | 12 VDC | 12 VDC | 12 VDC |
| Chassis | 162.5 × 114 × 47.5 mm (6.4 × 4.5 × 1.9 inch) | 162.5 × 114 × 47.5 mm (6.4 × 4.5 × 1.9 inch) | 315 × 242 × 45 mm (12.4 × 9.5 × 1.8 inch) | 380 × 320 × 48 mm (15.0 × 12.6 × 1.9 inch) | 380 × 320 × 48 mm (15.0 × 12.6 × 1.9 inch) |

EasyIP History

In 2012, Hikvision launched the first iteration of the EasyIP Solution, making a significant impact on the industry. Hikvision has been providing network video security solutions to SMB users balancing good quality and high performance ever since.

In 2017, the EasyIP 2.0+ and EasyIP 3.0 Solution featured the H.265+ codec, maximizing resources and taking video monitoring resolution up to 4K! With EasyIP 3.0 products, sharp, vivid imaging during the day was complemented by powerful DarkFighter technology at night. What's more, the 3.0 version provided more VCA functions, extended power-over-Ethernet functionality, and more. But Hikvision did not stop there.

In 2019, building on already powerful functions, the EasyIP 4.0 series came equipped with Hikvision AcuSense technology in both front-end and back-end products. AcuSense technology provides more efficient security management, making SMB solutions easier to use with higher efficiency based on deep learning technology. Moreover, the EasyIP 4.0 camera models with Hikvision ColorVu technology render 24/7 colorful imaging in extremely low light environments.

In 2021, the EasyIP 2.0+ camera models supporting Hikvision AcuSense technology give SMB users easy, budget-friendly access to AI technology.

EasyIP **4.0**
with ColorVu

ColorVu
AcuSense

- H.265 & H.265+
- Up to 4K resolution

EasyIP **4.0**
with AcuSense

AcuSense

- H.265 & H.265+
- Up to 4K resolution
- Powered by DarkFighter

EasyIP **2.0+**
with AcuSense

AcuSense

- H.265 & H.265+
- Up to 4K resolution

EasyIP **3.0**

- H.265 & H.265+
- Up to 4K resolution
- Powered by DarkFighter
- More VCA functions

EasyIP **2.0+**

- H.265 & H.265+
- Up to 4K resolution
- VCA functions

EasyIP **1.0+**

- H.265
- 2 MP
- VCA functions

Powered by DarkFighter

The excellent low-light imaging is supported on cameras of up-to-4K ultra HD resolution.

The combination of bright night imagery and high definition guarantees round-the-clock recording of video evidence.

Better color imaging in low-light environments

2 MP




Captured with a conventional 2 MP camera



Captured with a Powered by DarkFighter 2 MP camera

4 MP




Captured with a conventional 4 MP camera



Captured with a Powered by DarkFighter 4 MP camera

8 MP (4K)



Captured with a conventional 8 MP camera



Captured with a Powered by DarkFighter 8 MP camera

Other Features

Video Content Analytics is no longer reserved only for enterprise level security systems. The EasyIP solution brings VCAs into reach for SMB security. Designed for state-of-the-art performance with easy installation, our solution comes armed with reliable components and robust protections. With automatic network backup features and simple Internet connection services, a vigorous security system goes into operation quickly—and stays that way.

- VCAs
- Designed for easy installation
- 120 dB WDR (Wide Dynamic Range)
- EXIR 2.0
- Triple-stream
- On-board storage
- IP67, IP66, & IK10 protection
- ANR (Automatic Network Replenishment)
- Dual system backup (NVR)
- IP address automatic allocation
- Free Hik-Connect cloud service

Network Cameras

73 Pro Series (EasyIP)

101 Value Series



Network Cameras






Pro Series (EasyIP)






Simply Powerful, the Easier Journey to Better Security













With a perfect balance of performance and value, Hikvision Pro Series network cameras aim to provide just the right components, including artificial intelligence features that are affordable and easy to use.









- › Hikvision ColorVu technology: 24/7 colorful imaging
- › Hikvision AcuSense technology: focus on human & vehicle targets based on deep learning algorithms
- › H.265+ / H.265 codec
- › Up to 4K ultra-HD
- › Powered by DarkFighter
- › Efficient VCA functions
- › Easy to install, set up, and manage













| Model | DS-2CD2026G2-I(U) | DS-2CD2026G2-IU/SL | DS-2CD2046G2-I(U) | DS-2CD2046G2-IU/SL | DS-2CD2066G2-I(U) NEW |
|-----------------------|---|--|--|--|---|
| Image |  AcuSense Powered by DarkFighter |  AcuSense Powered by DarkFighter |  AcuSense Powered by DarkFighter |  AcuSense Powered by DarkFighter |  AcuSense Powered by DarkFighter |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.4" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 1920 × 1080 | 2688 × 1520 | 2688 × 1520 | 3200 × 1800 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.002 Lux @ (F1.4, AGC ON) | 0.002 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.6, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm |
| FOV | 2.8 mm, horizontal FOV 107°, vertical FOV 57°, diagonal FOV 129° 4 mm, horizontal FOV 86°, vertical FOV 47°, diagonal FOV 102° 6 mm, horizontal FOV 55°, vertical FOV 29°, diagonal FOV 65° | 2.8 mm, horizontal FOV: 107°, vertical FOV: 57°, diagonal FOV: 129° 4 mm, horizontal FOV: 86°, vertical FOV: 47°, diagonal FOV: 102° 6 mm, horizontal FOV: 55°, vertical FOV: 29°, diagonal FOV: 65° | 2.8 mm, horizontal FOV 103°, vertical FOV 55°, diagonal FOV 123° 4 mm, horizontal FOV 83°, vertical FOV 45°, diagonal FOV 98° 6 mm, horizontal FOV 53°, vertical FOV 28°, diagonal FOV 62° | 2.8 mm, horizontal FOV 103°, vertical FOV 55°, diagonal FOV 123° 4 mm, horizontal FOV 83°, vertical FOV 45°, diagonal FOV 98° 6 mm, horizontal FOV 53°, vertical FOV 28°, diagonal FOV 62° | 2.8 mm, horizontal FOV 105.1°, vertical FOV 53.4°, diagonal FOV 128.6° 4 mm, horizontal FOV 83.9°, vertical FOV 44.5°, diagonal FOV 100.8° 6 mm, horizontal FOV 47.5°, vertical FOV 26°, diagonal FOV 54.5° |
| Max. IR Range | 40 m | 40 m | 40 m | 40 m | 40 m |
| VCA | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3200 × 1800) 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800) 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to +60 °C [-22 °F to +140 °F] | -30 °C to +60 °C [-22 °F to +140 °F] | -30 °C to +60 °C [-22 °F to +140 °F] | -30 °C to +60 °C [-22 °F to +140 °F] | -30 °C to +60 °C [-22 °F to +140 °F] |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | Built-in microphone(-IU) | 1 built-in microphone 1 built-in speaker | Built-in microphone(-IU) | 1 built-in microphone 1 built-in speaker | Built-in microphone(-IU) |
| Alarm I/O | - | - | - | - | - |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |






| Model | DS-2CD2066G2-IU/SL | DS-2CD2086G2-I(U) | DS-2CD2086G2-IU/SL | DS-2CD2126G2-I(SU) | DS-2CD2146G2-I(SU) |
|-----------------------|---|---|---|---|---|
| Image |  NEW AcuSense Powered by DarkFighter |  AcuSense Powered by DarkFighter |  NEW AcuSense Powered by DarkFighter |  AcuSense Powered by DarkFighter |  AcuSense Powered by DarkFighter |
| Image Sensor | 1/2.4" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS |
| Resolution | 3200 × 1800 | 3840 × 2160 | 3840 × 2160 | 1920 × 1080 | 2688 × 1520 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.003 Lux @ (F1.6, AGC ON) | 0.003 Lux @ (F1.6, AGC ON) | 0.003 Lux @ (F1.6, AGC ON) | 0.002 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.4, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm | 2.8mm, 4 mm |
| FOV | 2.8 mm, horizontal FOV 105.1°, vertical FOV 53.4°, diagonal FOV 128.6° 4 mm, horizontal FOV 83.9°, vertical FOV 44.5°, diagonal FOV 100.8° 6 mm, horizontal FOV 47.5°, vertical FOV 26°, diagonal FOV 54.5° | 2.8 mm, horizontal FOV: 102°, vertical FOV: 55°, diagonal FOV: 120° 4 mm, horizontal FOV: 78°, vertical FOV: 43°, diagonal FOV: 92° 6 mm, horizontal FOV: 50°, vertical FOV: 27°, diagonal FOV: 59° | 2.8 mm, horizontal FOV: 102°, vertical FOV: 55°, diagonal FOV: 120° 4 mm, horizontal FOV: 78°, vertical FOV: 43°, diagonal FOV: 92° 6 mm, horizontal FOV: 50°, vertical FOV: 27°, diagonal FOV: 59° | 2.8 mm, horizontal FOV 107°, vertical FOV 57°, diagonal FOV 129° 4 mm, horizontal FOV 86°, vertical FOV 47°, diagonal FOV 102° | 2.8 mm, horizontal FOV 103°, vertical FOV 55°, diagonal FOV 123° 4 mm, horizontal FOV 83°, vertical FOV 45°, diagonal FOV 98° |
| Max. IR Range | 40 m | 40 m | 40 m | 30 m | 30 m |
| VCA | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection |
| Frame Rate | 50Hz: 20fps (3200 × 1800) 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800) 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 24fps (3840 × 2160) 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 24fps (3840 × 2160) 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) | "50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720)" | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP67 | IP67 | IP67 | IP67, IK10 | IP67, IK10 |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | 1 built-in microphone 1 built-in speaker | Built-in microphone(-IU) | 1 built-in microphone 1 built-in speaker | 1 In, 1 Out(-ISU) Built-in microphone(-ISU) | 1 In, 1 Out(-ISU) Built-in microphone(-ISU) |
| Alarm I/O | - | - | - | 1 In, 1 Out (-ISU) | 1 In, 1 Out (-ISU) |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |







| Model | DS-2CD2166G2-I(SU) | DS-2CD2186G2-I(SU) | DS-2CD2326G2-I(U) | DS-2CD2326G2-ISU/SL | DS-2CD2346G2-I(U) | DS-2CD2346G2-ISU/SL |
|-----------------------|---|---|---|---|---|---|
| Image |  AcuSense Powered by DarkFighter  |  AcuSense Powered by DarkFighter  |  AcuSense Powered by DarkFighter  |  AcuSense Powered by DarkFighter  |  AcuSense Powered by DarkFighter  |  AcuSense Powered by DarkFighter  |
| Image Sensor | 1/2.4" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/3" Progressive Scan CMOS |
| Resolution | 3200 × 1800 | 3840 × 2160 | 1920 × 1080 | 1920 × 1080 | 2688 × 1520 | 2688 × 1520 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.003 Lux @ (F1.6, AGC ON) | 0.003 Lux @ (F1.6, AGC ON) | 0.002 Lux @ (F1.4, AGC ON) | 0.002 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.4, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8mm, 4 mm |
| FOV | 2.8 mm, horizontal FOV 105.1°, vertical FOV 53.4°, diagonal FOV 128.6° 4 mm, horizontal FOV 83.9°, vertical FOV 44.5°, diagonal FOV 100.8° | 2.8 mm, horizontal FOV 111°, vertical FOV 59°, diagonal FOV 131° 4 mm, horizontal FOV 87°, vertical FOV 47°, diagonal FOV 102° | 2.8 mm, horizontal FOV 107°, vertical FOV 57°, diagonal FOV 129° 4 mm, horizontal FOV 86°, vertical FOV 47°, diagonal FOV 102° | 2.8 mm, horizontal FOV 107°, vertical FOV 57°, diagonal FOV 129° 4 mm, horizontal FOV 86°, vertical FOV 47°, diagonal FOV 102° | 2.8 mm, horizontal FOV 103°, vertical FOV 55°, diagonal FOV 123° 4 mm, horizontal FOV 83°, vertical FOV 45°, diagonal FOV 98° | 2.8 mm, horizontal FOV 103°, vertical FOV 55°, diagonal FOV 123° 4 mm, horizontal FOV 83°, vertical FOV 45°, diagonal FOV 98° |
| Max. IR Range | 30 m | 30 m | 30 m | 30 m | 30 m | 30 m |
| VCA | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection |
| Frame Rate | 50Hz: 20fps (3200 × 1800) 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800) 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 24fps (3840 × 2160) 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP67, IK10 | IP67, IK10 | IP67 | IP67 | IP67 | IP67 |
| Angle Adjustment | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | 1 In, 1 Out(-ISU) Built-in microphone(-ISU) | 1 In, 1 Out(-ISU) Built-in microphone(-ISU) | Built-in microphone(-IU) | 1 In, 1 Out Built-in microphone Built-in speaker | Built-in microphone(-IU) | 1 In, 1 Out Built-in microphone Built-in speaker |
| Alarm I/O | 1 In, 1 Out (-ISU) | 1 In, 1 Out (-ISU) | - | 1 In, 1 Out | - | 1 In, 1 Out |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |







| Model | DS-2CD2366G2-I(U) | DS-2CD2366G2-ISU/SL | DS-2CD2386G2-I(U) | DS-2CD2386G2-ISU/SL |
|-----------------------|--|---|--|--|
| Image |  NEW  |  NEW  |  HOT  |  HOT  |
| Image Sensor | 1/2.4" Progressive Scan CMOS | 1/2.4" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS |
| Resolution | 3200 × 1800 | 3200 × 1800 | 3840 × 2160 | 3840 × 2160 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.003 Lux @ (F1.6, AGC ON) | 0.003 Lux @ (F1.6, AGC ON) | 0.003 Lux @ (F1.6, AGC ON) | 0.003 Lux @ (F1.6, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8mm, 4 mm |
| FOV | 2.8 mm, horizontal FOV 105.1°, vertical FOV 53.4°, diagonal FOV 128.6° 4 mm, horizontal FOV 83.9°, vertical FOV 44.5°, diagonal FOV 100.8° | 2.8 mm, horizontal FOV 105.1°, vertical FOV 53.4°, diagonal FOV 128.6° 4 mm, horizontal FOV 83.9°, vertical FOV 44.5°, diagonal FOV 100.8° | 2.8 mm, horizontal FOV: 110.7°, vertical FOV: 59.1°, diagonal FOV: 131° 4 mm, horizontal FOV: 87.1°, vertical FOV: 47.4°, diagonal FOV: 101.8° | 2.8 mm, horizontal FOV: 110.7°, vertical FOV: 59.1°, diagonal FOV: 131° 4 mm, horizontal FOV: 87.1°, vertical FOV: 47.4°, diagonal FOV: 101.8° |
| Max. IR Range | 30 m | 30 m | 30 m | 30 m |
| VCA | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection |
| Frame Rate | 50Hz: 20fps (3200 × 1800) 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800) 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3200 × 1800) 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800) 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 24fps (3840 × 2160) 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 24fps (3840 × 2160) 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 |
| Protection Level | IP67 | IP67 | IP67 | IP67 |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 256 GB | 256 GB | 256 GB | 256 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | Built-in microphone[-IU] | 1 In, 1 Out Built-in microphone Built-in speaker | Built-in microphone[-IU] | 1 In, 1 Out Built-in microphone Built-in speaker |
| Alarm I/O | - | 1 In, 1 Out | - | 1 In, 1 Out |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |





| Model | DS-2CD252662-I(S) | DS-2CD254662-I(W)(S) | DS-2CD256662-I(S) | DS-2CD262662-IZS | DS-2CD262662-IZSU/SL |
|-----------------------|--|--|--|--|--|
| Image |  AcuSense Powered by DarkFighter ⁺ |  AcuSense Powered by DarkFighter ⁺ |  AcuSense Powered by DarkFighter ⁺ |  AcuSense Powered by DarkFighter ⁺ |  AcuSense Powered by DarkFighter ⁺ |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.4" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 2688 × 1520 | 3200 × 1800 | 1920 × 1080 | 1920 × 1080 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.002 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.6, AGC ON) | 0.002 Lux @ (F1.4, AGC ON) | 0.002 Lux @ (F1.4, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8 to 12 mm | 2.8 to 12 mm |
| FOV | 2.8 mm, horizontal FOV 107°, vertical FOV 57°, diagonal FOV 129° 4 mm, horizontal FOV 86°, vertical FOV 47°, diagonal FOV 102° | 2.8 mm, horizontal FOV 103°, vertical FOV 55°, diagonal FOV 123° 4 mm, horizontal FOV 83°, vertical FOV 45°, diagonal FOV 98° | 2.8 mm, horizontal FOV 105.1°, vertical FOV 53.4°, diagonal FOV 128.6° 4 mm, horizontal FOV 83.9°, vertical FOV 44.5°, diagonal FOV 100.8° | 2.8 to 12 mm, horizontal FOV 113° to 31°, vertical FOV 58° to 18°, diagonal FOV 138° to 36° | 2.8 to 12 mm, horizontal FOV 113° to 31°, vertical FOV 58° to 18°, diagonal FOV 138° to 36° |
| Max. IR Range | 30 m | 30 m | 30 m | 60 m | 60 m |
| VCA | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection |
| Frame Rate | 50Hz: 25 fps (1920 × 1080, 1280 × 720) 60Hz: 30 fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3200 × 1800) 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800) 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP67, IK08 | IP67, IK08 | IP67, IK08 | IP66, IK10 | IP66, IK10 |
| Angle Adjustment | Pan: -30° to 30°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: -30° to 30°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: -30° to 30°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | 1 In, 1 Out(-IS) Built-in microphone | 1 In, 1 Out(-IS) Built-in microphone | 1 In, 1 Out(-IS) Built-in microphone | 1 In, 1 Out | 1 In, 1 Out Built-in microphone Built-in speaker |
| Alarm I/O | 1 In, 1 Out (-IS) | 1 In, 1 Out (-IS) | 1 In, 1 Out (-IS) | 1 In, 1 Out | 1 In, 1 Out |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3at, class4) | 12 VDC ± 25%, PoE (802.3at, class4) |






| Model | DS-2CD2646G2-IZS | DS-2CD2646G2-IZSU/SL | DS-2CD2666G2-IZS | DS-2CD2666G2-IZSU/SL | DS-2CD2666G2-IZS |
|-----------------------|--|--|--|--|--|
| Image |  HOT AcuSense Powered by DarkFighter |  NEW AcuSense Powered by DarkFighter |  NEW AcuSense Powered by DarkFighter |  NEW AcuSense Powered by DarkFighter |  HOT AcuSense Powered by DarkFighter |
| Image Sensor | 1/3" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.4" Progressive Scan CMOS | 1/2.4" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS |
| Resolution | 2688 × 1520 | 2688 × 1520 | 3200 × 1800 | 3200 × 1800 | 3840 × 2160 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.003 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.4, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm |
| FOV | 2.8 to 12 mm, horizontal FOV 108° to 30°, vertical FOV 56° to 17°, diagonal FOV 131° to 35° | 2.8 to 12 mm, horizontal FOV 108° to 30°, vertical FOV 56° to 17°, diagonal FOV 131° to 35° | 2.8 to 12 mm, horizontal FOV 116.5° to 34.9°, vertical FOV 60° to 19.6°, diagonal FOV 141.9° to 41° | 2.8 to 12 mm, horizontal FOV 116.5° to 34.9°, vertical FOV 60° to 19.6°, diagonal FOV 141.9° to 41° | 2.8 to 12mm, horizontal FOV 108.1° to 45.5°, vertical FOV 58.4° to 25.7°, diagonal FOV 127.3° to 52.1° |
| Max. IR Range | 60 m | 60 m | 60 m | 60 m | 60 m |
| VCA | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection |
| Frame Rate | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3200 × 1800) 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800) 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3200 × 1800) 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800) 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 24fps (3840 × 2160) 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP66, IK10 | IP66, IK10 | IP66, IK10 | IP66, IK10 | IP66, IK10 |
| Angle Adjustment | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | 1 In, 1 Out | 1 In, 1 Out Built-in microphone Built-in speaker | 1 In, 1 Out | 1 In, 1 Out Built-in microphone Built-in speaker | 1 In, 1 Out |
| Alarm I/O | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out |
| Power | 12 VDC ± 25%, PoE (802.3at, class4) | 12 VDC ± 25%, PoE (802.3at, class4) | 12 VDC ± 25%, PoE (802.3at, class4) | 12 VDC ± 25%, PoE (802.3at, class4) | 12 VDC ± 25%, PoE (802.3at, class4) |






| Model | DS-2CD2686G2-IZSU/SL | DS-2CD2726G2-IZS | DS-2CD2746G2-IZS | DS-2CD2766G2-IZS | DS-2CD2786G2-IZS |
|-----------------------|--|--|--|--|--|
| Image |  HOT AcuSense Powered by DarkFighter + |  AcuSense Powered by DarkFighter + |  AcuSense Powered by DarkFighter + |  NEW AcuSense Powered by DarkFighter + |  AcuSense Powered by DarkFighter + |
| Image Sensor | 1/1.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.4" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS |
| Resolution | 3840 × 2160 | 1920 × 1080 | 2688 × 1520 | 3200 × 1800 | 3840 × 2160 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.003 Lux @ (F1.4, AGC ON) | 0.002 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.4, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm |
| FOV | 2.8 to 12mm, horizontal FOV 108.1° to 45.5°, vertical FOV 58.4° to 25.7°, diagonal FOV 127.3° to 52.1° | 2.8 to 12 mm, horizontal FOV 113° to 31°, vertical FOV 58° to 18°, diagonal FOV 138° to 36° | 2.8 to 12 mm, horizontal FOV 108° to 30°, vertical FOV 56° to 17°, diagonal FOV 131° to 35° | 2.8 to 12 mm, horizontal FOV 116.5° to 34.9°, vertical FOV 60° to 19.6°, diagonal FOV 141.9° to 41° | 2.8 to 12mm, horizontal FOV 108.1° to 45.5°, vertical FOV 58.4° to 25.7°, diagonal FOV 127.3° to 52.1° |
| Max. IR Range | 60 m | 40 m | 40 m | 40m | 40 m |
| VCA | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection |
| Frame Rate | 50Hz: 25fps (3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 24fps (3840 × 2160) 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3200 × 1800) 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800) 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 24fps (3840 × 2160) 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP66, IK10 | IP66, IK10 | IP66, IK10 | IP66, IK10 | IP66, IK10 |
| Angle Adjustment | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | " 1 In, 1 Out Built-in microphone Built-in speaker" | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out |
| Alarm I/O | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out |
| Power | 12 VDC ± 25%, PoE (802.3at, class4) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |




| Model | DS-2CD2H26G2-IZS | DS-2CD2H46G2-IZS | DS-2CD2H66G2-IZS | DS-2CD2H86G2-IZS | DS-2CD2T26G2-2I/4I | DS-2CD2T26G2-ISU/SL |
|-----------------------|--|--|--|--|---|---|
| Image |  NEW AcuSense Powered by DarkFighter |  NEW AcuSense Powered by DarkFighter |  NEW AcuSense Powered by DarkFighter |  NEW AcuSense Powered by DarkFighter |  AcuSense Powered by DarkFighter |  AcuSense Powered by DarkFighter |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.4" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 2688 × 1520 | 3200 × 1800 | 3840 × 2160 | 1920 × 1080 | 1920 × 1080 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.002 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.4, AGC ON) | 0.002 Lux @ (F1.4, AGC ON) | 0.002 Lux @ (F1.4, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm |
| FOV | 2.8 to 12 mm, horizontal FOV 113° to 33.9°, vertical FOV 58° to 18.9°, diagonal FOV 138° to 39° | 2.8 to 12 mm, horizontal FOV 108° to 32.8°, vertical FOV 56° to 18.5°, diagonal FOV 131° to 37.8° | 2.8 to 12 mm, horizontal FOV 116.5° to 34.9°, vertical FOV 60° to 19.6°, diagonal FOV 141.9° to 41° | 2.8 to 12 mm, horizontal FOV 108° to 45.8°, vertical FOV 58.4° to 25.7°, diagonal FOV 127.3° to 52.1° | 2.8 mm, horizontal FOV 107°, vertical FOV 57°, diagonal FOV 129° 4 mm, horizontal FOV 86°, vertical FOV 47°, diagonal FOV 102° 6 mm, horizontal FOV 55°, vertical FOV 29°, diagonal FOV 65° | 2.8 mm, horizontal FOV 107°, vertical FOV 57°, diagonal FOV 129° 4 mm, horizontal FOV 86°, vertical FOV 47°, diagonal FOV 102° 6 mm, horizontal FOV 55°, vertical FOV 29°, diagonal FOV 65° |
| Max. IR Range | 40m | 40m | 40m | 40m | -2l: 60 m -4l: 80 m | 60 m |
| VCA | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3200 × 1800) 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800) 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 24fps (3840 × 2160) 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP66, IK10 | IP66, IK10 | IP66, IK10 | IP66, IK10 | IP67 | IP67 |
| Angle Adjustment | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out | - | 1 In, 1 Out Built-in microphone Built-in speaker |
| Alarm I/O | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out | - | 1 In, 1 Out |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |







| Model | DS-2CD2T4662-2I/4I | DS-2CD2T4662-ISU/SL | DS-2CD2T6662-2I/4I | DS-2CD2T6662-ISU/SL | DS-2CD2T8662-2I/4I | DS-2CD2T8662-ISU/SL |
|-----------------------|--|--|---|---|--|--|
| Image |  AcuSense Powered by DarkFighter |  AcuSense Powered by DarkFighter |  NEW AcuSense Powered by DarkFighter |  NEW AcuSense Powered by DarkFighter |  HOT AcuSense Powered by DarkFighter |  AcuSense Powered by DarkFighter |
| Image Sensor | 1/3" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.4" Progressive Scan CMOS | 1/2.4" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS |
| Resolution | 2688 × 1520 | 2688 × 1520 | 3200 × 1800 | 3200 × 1800 | 3840 × 2160 | 3840 × 2160 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.003 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.4, AGC ON) | 0.003 Lux @ (F1.6, AGC ON) | 0.003 Lux @ (F1.6, AGC ON) | 0.003 Lux @ (F1.6, AGC ON) | 0.003 Lux @ (F1.6, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm |
| FOV | 2.8 mm, horizontal FOV 103°, vertical FOV 55°, diagonal FOV 123° 4 mm, horizontal FOV 83°, vertical FOV 45°, diagonal FOV 98° 6 mm, horizontal FOV 53°, vertical FOV 28°, diagonal FOV 62° | 2.8 mm, horizontal FOV 103°, vertical FOV 55°, diagonal FOV 123° 4 mm, horizontal FOV 83°, vertical FOV 45°, diagonal FOV 98° 6 mm, horizontal FOV 53°, vertical FOV 28°, diagonal FOV 62° | 2.8 mm, horizontal FOV 105.1°, vertical FOV 53.4°, diagonal FOV 128.6° 4 mm, horizontal FOV 83.9°, vertical FOV 44.5°, diagonal FOV 100.8° 6 mm, horizontal FOV 47.5°, vertical FOV 26°, diagonal FOV 54.5° | 2.8 mm, horizontal FOV 105.1°, vertical FOV 53.4°, diagonal FOV 128.6° 4 mm, horizontal FOV 83.9°, vertical FOV 44.5°, diagonal FOV 100.8° 6 mm, horizontal FOV 47.5°, vertical FOV 26°, diagonal FOV 54.5° | 2.8 mm, horizontal FOV: 110.7°, vertical FOV: 59.1°, diagonal FOV: 131° 4 mm, horizontal FOV: 87.1°, vertical FOV: 47.4°, diagonal FOV: 101.8° 6 mm, horizontal FOV: 50.8°, vertical FOV: 27.6°, diagonal FOV: 60° | 2.8 mm, horizontal FOV: 110.7°, vertical FOV: 59.1°, diagonal FOV: 131° 4 mm, horizontal FOV: 87.1°, vertical FOV: 47.4°, diagonal FOV: 101.8° 6 mm, horizontal FOV: 50.8°, vertical FOV: 27.6°, diagonal FOV: 60° |
| Max. IR Range | -2: 60 m -4: 80 m | 60 m | -2: 60 m -4: 80 m | 60 m | -2: 60 m -4: 80 m | 60 m |
| VCA | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection |
| Frame Rate | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3200 × 1800) 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800) 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3200 × 1800) 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800) 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 24fps (3840 × 2160) 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 24fps (3840 × 2160) 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 | IP67 |
| Angle Adjustment | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | - | 1 In, 1 Out Built-in microphone Built-in speaker | - | 1 In, 1 Out Built-in microphone Built-in speaker | - | 1 In, 1 Out Built-in microphone Built-in speaker |
| Alarm I/O | - | 1 In, 1 Out | - | 1 In, 1 Out | - | 1 In, 1 Out |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |

| Model | DS-2CD202762-L(U) | DS-2CD204762-L(U) | DS-2CD204762-LU/SL | DS-2CD208762-L(U) | DS-2CD212762(-SU) |
|-----------------------|--|---|---|---|--|
| Image |  ColorVu AcuSense |  ColorVu AcuSense |  ColorVu AcuSense |  ColorVu AcuSense |  ColorVu AcuSense |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS | 1/1.2" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 2688 × 1520 | 2688 × 1520 | 3840 × 2160 | 1920 × 1080 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with Light | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with Light | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with Light | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with Light | 0.0005 Lux @ (F1.0, AGC ON) |
| WDR | 120dB | 130dB | 130dB | 130dB | 120dB |
| Lens | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm |
| FOV | 2.8 mm, horizontal FOV 107°, vertical FOV 56°, diagonal FOV 127° 4 mm, horizontal FOV 84°, vertical FOV 45°, diagonal FOV 99° 6 mm, horizontal FOV 55°, vertical FOV 30°, diagonal FOV 63° | 2.8 mm, horizontal FOV 109°, vertical FOV 55°, diagonal FOV 138° 4 mm, horizontal FOV 94°, vertical FOV 49°, diagonal FOV 113° 6 mm, horizontal FOV 57°, vertical FOV 32°, diagonal FOV 66° | 2.8 mm, horizontal FOV 109°, vertical FOV 55°, diagonal FOV 138° 4 mm, horizontal FOV 94°, vertical FOV 49°, diagonal FOV 113° 6 mm, horizontal FOV 57°, vertical FOV 32°, diagonal FOV 66° | 2.8 mm, horizontal FOV 102°, vertical FOV 52°, diagonal FOV 124° 4 mm, horizontal FOV 88°, vertical FOV 49°, diagonal FOV 102° 6 mm, horizontal FOV 54°, vertical FOV 30°, diagonal FOV 62° | 2.8 mm, horizontal FOV 107°, vertical FOV 56°, diagonal FOV 127° 4 mm, horizontal FOV 84°, vertical FOV 45°, diagonal FOV 99° |
| Max. Light Range | 40 m | 40 m | 40m | 40 m | - |
| VCA | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 24fps (3840 × 2160) 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67, IK10 |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | -U: Built-in microphone | -U: Built-in microphone | 1 built-in microphone 1 built-in speaker | -U: Built-in microphone | 1 In, 1 Out(-SU) Built-in microphone(-SU) |
| Alarm I/O | - | - | - | - | 1 In, 1 Out (-SU) |
| Power | 12 VDC ± 25%, PoE+B5:B24 (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |







| Model | DS-2CD214762(-SU) | DS-2CD232762-L(U) | DS-2CD234762-L(U) | DS-2CD234762-LSU/SL | DS-2CD264762-LZS |
|-----------------------|--|--|---|--|--|
| Image |  ColorVu AcuSense NEW |  ColorVu AcuSense |  ColorVu AcuSense HOT |  ColorVu AcuSense NEW |  ColorVu AcuSense NEW |
| Image Sensor | 1/1.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS |
| Resolution | 2688 x 1520 | 1920 x 1080 | 2688 x 1520 | 2688 x 1520 | 2688 x 1520 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.0005 Lux @ (F1.0, AGC ON) | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with Light | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with Light | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with Light | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with Light |
| WDR | 130dB | 120dB | 130dB | 130dB | 130dB |
| Lens | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8mm, 4 mm | 3.6 to 9 mm |
| FOV | 2.8 mm, horizontal FOV 106°, vertical FOV 61°, diagonal FOV 127° 4 mm, horizontal FOV 95°, vertical FOV 51°, diagonal FOV 115° | 2.8 mm, horizontal FOV 107°, vertical FOV 56°, diagonal FOV 127° 4 mm, horizontal FOV 84°, vertical FOV 45°, diagonal FOV 99° | 2.8 mm, horizontal FOV 109°, vertical FOV 55°, diagonal FOV 138° 4 mm, horizontal FOV 94°, vertical FOV 49°, diagonal FOV 113° | 2.8 mm, horizontal FOV 109°, vertical FOV 55°, diagonal FOV 138° 4 mm, horizontal FOV 94°, vertical FOV 49°, diagonal FOV 113° | 3.6 to 9 mm, horizontal FOV 92.3° to 48°, vertical FOV 48.4° to 27°, diagonal FOV 112.2° to 55° |
| Max. Light Range | - | 30 m | 30 m | 30 m | 60 m |
| VCA | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection |
| Frame Rate | 50Hz: 25fps (2688 x 1520, 1920 x 1080, 1280 x 720) 60Hz: 24fps (2688 x 1520), 30fps (1920 x 1080, 1280 x 720) | 50Hz: 25fps (1920 x 1080, 1280 x 720) 60Hz: 30fps (1920 x 1080, 1280 x 720) | 50Hz: 25fps (2688 x 1520, 1920 x 1080, 1280 x 720) 60Hz: 30fps (2688 x 1520, 1920 x 1080, 1280 x 720) | 50Hz: 25fps (2688 x 1520, 1920 x 1080, 1280 x 720) 60Hz: 30fps (2688 x 1520, 1920 x 1080, 1280 x 720) | 50Hz: 25fps (2688 x 1520, 1920 x 1080, 1280 x 720) 60Hz: 30fps (2688 x 1520, 1920 x 1080, 1280 x 720) |
| Streams | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP67, IK10 | IP67 | IP67 | IP67 | IP66, IK10 |
| Angle Adjustment | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | 1 In, 1 Out(-SU) Built-in microphone(-SU) | -U: Built-in microphone | -U: Built-in microphone | 1 In, 1 Out Built-in microphone Built-in speaker | 1 In, 1 Out |
| Alarm I/O | 1 In, 1 Out (-SU) | - | - | 1 In, 1 Out | 1 In, 1 Out |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |







| Model | DS-2CD274762-LZS | DS-2CD2T2762-L | DS-2CD2T4762-L | DS-2CD2T4762-LSU/SL | DS-2CD2T8762-L |
|-----------------------|--|--|--|---|--|
| Image |  ColorVu AcuSense NEW |  ColorVu AcuSense |  ColorVu AcuSense |  ColorVu AcuSense NEW |  ColorVu AcuSense NEW |
| Image Sensor | 1/1.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS | 1/1.2" Progressive Scan CMOS |
| Resolution | 2688 × 1520 | 1920 × 1080 | 2688 × 1520 | 2688 × 1520 | 3840 × 2160 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with Light | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with Light | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with Light | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with Light | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with Light |
| WDR | 130dB | 120dB | 130dB | 130dB | 130dB |
| Lens | 3.6 to 9 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm |
| FOV | 3.6 to 9 mm, horizontal FOV 92.3° to 48°, vertical FOV 48.4° to 27°, diagonal FOV 112.2° to 55° | 2.8 mm, horizontal FOV: 112°, vertical FOV: 57°, diagonal FOV: 138° 4 mm, horizontal FOV: 89°, vertical FOV: 46°, diagonal FOV: 106° 6 mm, horizontal FOV: 56°, vertical FOV: 30°, diagonal FOV: 66° | 2.8 mm, horizontal FOV: 109°, vertical FOV: 55°, diagonal FOV: 138° 4 mm, horizontal FOV: 94°, vertical FOV: 48°, diagonal FOV: 115° 6 mm, horizontal FOV: 57°, vertical FOV: 31°, diagonal FOV: 67° | 2.8 mm, horizontal FOV 109°, vertical FOV 55°, diagonal FOV 138° 4 mm, horizontal FOV 94°, vertical FOV 49°, diagonal FOV 113° 6 mm, horizontal FOV 57°, vertical FOV 32°, diagonal FOV 66° | 2.8 mm, horizontal FOV102°, vertical FOV 52°, diagonal FOV 124° 4 mm, horizontal FOV 88°, vertical FOV 49°, diagonal FOV 102° 6 mm, horizontal FOV 54°, vertical FOV 30°, diagonal FOV 62° |
| Max. Light Range | 40 m | 60 m | 60 m | 60 m | 60 m |
| VCA | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection |
| Frame Rate | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 24fps (3840 × 2160) 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP66, IK10 | IP67 | IP67 | IP67 | IP67 |
| Angle Adjustment | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | 1 In, 1 Out | - | - | 1 In, 1 Out Built-in microphone Built-in speaker | - |
| Alarm I/O | 1 In, 1 Out | - | - | 1 In, 1 Out | - |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 V+N16+N6:N24+N5:N24+N16+N6:N24+N3:N24+N1+N5:N24 | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |


| Model | DS-2CD202761-L | DS-2CD204761-L | DS-2CD232761-L(U) | DS-2CD234761-L(U) | DS-2CD2T2761-L | DS-2CD2T4761-L |
|-----------------------|--|--|--|--|--|--|
| Image |  ColorVu |  ColorVu |  ColorVu |  ColorVu |  ColorVu |  ColorVu |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/1.8" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 2560 × 1440 | 1920 × 1080 | 2688 × 1520 | 1920 × 1080 | 2688 × 1520 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.0035 @ (F1.0, AGC ON), 0 Lux with LED on | 0.0014 @ (F1.0, AGC ON), 0 Lux with LED on | 0.0035 Lux @ (F1.0, AGC ON), 0 Lux with Light | 0.0014 @ (F1.0, AGC ON), 0 Lux with Light | 0.0035 Lux @ (F1.0, AGC ON), 0 Lux with Light | 0.0014 @ (F1.0, AGC ON), 0 Lux with Light |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm |
| FOV | 2.8 mm, horizontal FOV: 112°, vertical FOV: 57°, diagonal FOV: 138° 4 mm, horizontal FOV: 89°, vertical FOV: 47°, diagonal FOV: 106° 6 mm, horizontal FOV: 54°, vertical FOV: 30°, diagonal FOV: 63° | 2.8 mm, horizontal FOV: 102°, vertical FOV: 51°, diagonal FOV: 125° 4 mm, horizontal FOV: 89°, vertical FOV: 46°, diagonal FOV: 105° 6 mm, horizontal FOV: 54°, vertical FOV: 30°, diagonal FOV: 62° | 2.8 mm, horizontal FOV: 112°, vertical FOV: 57°, diagonal FOV: 138° 4 mm, horizontal FOV: 89°, vertical FOV: 46°, diagonal FOV: 106° 6 mm, horizontal FOV: 56°, vertical FOV: 30°, diagonal FOV: 66° | 2.8 mm, horizontal FOV: 109°, vertical FOV: 55°, diagonal FOV: 138° 4 mm, horizontal FOV: 94°, vertical FOV: 48°, diagonal FOV: 115° 6 mm, horizontal FOV: 57°, vertical FOV: 31°, diagonal FOV: 67° | 2.8 mm, horizontal FOV: 112°, vertical FOV: 57°, diagonal FOV: 138° 4 mm, horizontal FOV: 89°, vertical FOV: 46°, diagonal FOV: 106° 6 mm, horizontal FOV: 56°, vertical FOV: 30°, diagonal FOV: 66° | 2.8 mm, horizontal FOV: 109°, vertical FOV: 55°, diagonal FOV: 138° 4 mm, horizontal FOV: 94°, vertical FOV: 48°, diagonal FOV: 115° 6 mm, horizontal FOV: 57°, vertical FOV: 31°, diagonal FOV: 67° |
| Max. Light Range | 30 m | 30 m | 30 m | 30 m | 30 m | 30 m |
| VCA | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection, object removal detection, unattended baggage detection | Line crossing detection, intrusion detection, object removal detection, unattended baggage detection | Line crossing detection, intrusion detection, object removal detection, unattended baggage detection | Line crossing detection, intrusion detection, object removal detection, unattended baggage detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 24fps (2560 × 1440), 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 2560 × 1440, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 2560 × 1440, 1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP67 | IP67 | -L model: IP67 -LU model: IP66 | -L model: IP67 -LU model: IP66 | IP67 | IP67 |
| Angle Adjustment | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 128 GB | 128 GB | 128 GB | 128 GB | 128 GB | 128 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | - | - | -U: Built-in microphone | -U: Built-in microphone | - | - |
| Alarm I/O | - | - | - | - | - | - |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |

| Model | DS-2CD202362-I(U) | DS-2CD204362-I(U) | DS-2CD206362-I(U) | DS-2CD208362-I(U) | DS-2CD212362-I(S) | DS-2CD212362-IU |
|-----------------------|---|---|---|---|---|---|
| Image |  NEW AcuSense |  NEW AcuSense |  NEW AcuSense |  NEW AcuSense |  NEW AcuSense |  NEW AcuSense |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 2688 × 1520 | 3200 × 1800 | 3840 × 2160 | 1920 × 1080 | 1920 × 1080 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm | 2.8mm, 4 mm |
| FOV | 2.8 mm, horizontal FOV 107°, vertical FOV 57°, diagonal FOV 127° 4 mm, horizontal FOV 87°, vertical FOV 46°, diagonal FOV 104° 6 mm, horizontal FOV 54°, vertical FOV 29°, diagonal FOV 63° | 2.8 mm, horizontal FOV 103°, vertical FOV 55°, diagonal FOV 122° 4 mm, horizontal FOV 84°, vertical FOV 45°, diagonal FOV 100° 6 mm, horizontal FOV 52°, vertical FOV 28°, diagonal FOV 61° | 2.8 mm, horizontal FOV 107.1°, vertical FOV 57°, diagonal FOV 127.6° 4 mm, horizontal FOV 87.2°, vertical FOV 46.2°, diagonal FOV 104.8° 6 mm, horizontal FOV 53.9°, vertical FOV 28.8°, diagonal FOV 62.8° | 2.8 mm, horizontal FOV 107.1°, vertical FOV 57°, diagonal FOV 127.6° 4 mm, horizontal FOV 87.2°, vertical FOV 46.2°, diagonal FOV 104.8° 6 mm, horizontal FOV 53.9°, vertical FOV 28.8°, diagonal FOV 62.8° | 2.8 mm, horizontal FOV 107°, vertical FOV 57°, diagonal FOV 127° 4 mm, horizontal FOV 87°, vertical FOV 46°, diagonal FOV 104° | 2.8 mm, horizontal FOV 107°, vertical FOV 57°, diagonal FOV 127° 4 mm, horizontal FOV 87°, vertical FOV 46°, diagonal FOV 104° |
| Max. IR Range | 40 m | 40 m | 40 m | 40 m | 30 m | 30 m |
| VCA | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3200 × 1800), 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800), 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3840 × 2160), 25fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3840 × 2160), 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67, IK10 | IP67, IK10 |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° |
| Operating Temperature | -30 °C to +60 °C [-22 °F to +140 °F] | -30 °C to +60 °C [-22 °F to +140 °F] | -30 °C to +60 °C [-22 °F to +140 °F] | -30 °C to +60 °C [-22 °F to +140 °F] | -30 °C to +60 °C [-22 °F to +140 °F] | -30 °C to +60 °C [-22 °F to +140 °F] |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | Built-in microphone(-IU) | Built-in microphone(-IU) | Built-in microphone(-IU) | Built-in microphone(-IU) | 1 In, 1 Out(-S) | 1 built-in microphone |
| Alarm I/O | - | - | - | - | 1 In, 1 Out(-S) | - |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |





| Model | DS-2CD214362-I(S) | DS-2CD214362-IU | DS-2CD216362-I(S) | DS-2CD216362-IU | DS-2CD218362-I(S) | DS-2CD218362-IU |
|-----------------------|---|---|--|--|--|--|
| Image |  AcuSense |  AcuSense |  AcuSense |  AcuSense |  AcuSense |  AcuSense |
| Image Sensor | 1/3" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS |
| Resolution | 2688 × 1520 | 2688 × 1520 | 3200 × 1800 | 3200 × 1800 | 3840 × 2160 | 3840 × 2160 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8mm, 4 mm |
| FOV | 2.8 mm, horizontal FOV 103°, vertical FOV 55°, diagonal FOV 122° 4 mm, horizontal FOV 84°, vertical FOV 45°, diagonal FOV 100° | 2.8 mm, horizontal FOV 103°, vertical FOV 55°, diagonal FOV 122° 4 mm, horizontal FOV 84°, vertical FOV 45°, diagonal FOV 100° | 2.8 mm, horizontal FOV 107.1°, vertical FOV 57°, diagonal FOV 127.6° 4 mm, horizontal FOV 87.2°, vertical FOV 46.2°, diagonal FOV 104.8° | 2.8 mm, horizontal FOV 107.1°, vertical FOV 57°, diagonal FOV 127.6° 4 mm, horizontal FOV 87.2°, vertical FOV 46.2°, diagonal FOV 104.8° | 2.8 mm, horizontal FOV 107.1°, vertical FOV 57°, diagonal FOV 127.6° 4 mm, horizontal FOV 87.2°, vertical FOV 46.2°, diagonal FOV 104.8° | 2.8 mm, horizontal FOV 107.1°, vertical FOV 57°, diagonal FOV 127.6° 4 mm, horizontal FOV 87.2°, vertical FOV 46.2°, diagonal FOV 104.8° |
| Max. IR Range | 30 m | 30 m | 30 m | 30 m | 30 m | 30 m |
| VCA | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection |
| Frame Rate | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3200 × 1800), 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800), 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3200 × 1800), 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800), 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3840 × 2160), 25fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3840 × 2160), 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3840 × 2160), 25fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3840 × 2160), 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP67, IK10 | IP67, IK10 | IP67, IK10 | IP67, IK10 | IP67, IK10 | IP67, IK10 |
| Angle Adjustment | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | 1 In, 1 Out(-S) | 1 built-in microphone | 1 In, 1 Out(-S) | 1 built-in microphone | 1 In, 1 Out(-S) | 1 built-in microphone |
| Alarm I/O | 1 In, 1 Out(-S) | - | 1 In, 1 Out(-S) | - | 1 In, 1 Out(-S) | - |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |





| Model | DS-2CD232362-I(U) | DS-2CD234362-I(U) | DS-2CD236362-I(U) | DS-2CD238362-I(U) | DS-2CD252362-I(S) | DS-2CD254362-I(W)(S) |
|-----------------------|---|---|--|--|---|---|
| Image |  AcuSense |  AcuSense |  AcuSense |  AcuSense |  AcuSense |  AcuSense |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 2688 × 1520 | 3200 × 1800 | 3840 × 2160 | 1920 × 1080 | 2688 × 1520 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8mm, 4 mm |
| FOV | 2.8 mm, horizontal FOV 107°, vertical FOV 57°, diagonal FOV 127° 4 mm, horizontal FOV 87°, vertical FOV 46°, diagonal FOV 104° | 2.8 mm, horizontal FOV 103°, vertical FOV 55°, diagonal FOV 122° 4 mm, horizontal FOV 84°, vertical FOV 45°, diagonal FOV 100° | 2.8 mm, horizontal FOV 107.1°, vertical FOV 57°, diagonal FOV 127.6° 4 mm, horizontal FOV 87.2°, vertical FOV 46.2°, diagonal FOV 104.8° | 2.8 mm, horizontal FOV 107.1°, vertical FOV 57°, diagonal FOV 127.6° 4 mm, horizontal FOV 87.2°, vertical FOV 46.2°, diagonal FOV 104.8° | 2.8 mm, horizontal FOV 107°, vertical FOV 57°, diagonal FOV 127° 4 mm, horizontal FOV 87°, vertical FOV 46°, diagonal FOV 104° | 2.8 mm, horizontal FOV 103°, vertical FOV 55°, diagonal FOV 122° 4 mm, horizontal FOV 84°, vertical FOV 45°, diagonal FOV 100° |
| Max. IR Range | 30 m | 30 m | 30 m | 30 m | 30 m | 30 m |
| VCA | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3200 × 1800), 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800), 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3840 × 2160), 25fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3840 × 2160), 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67, IK08 | IP67, IK08 |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: -30° to 30°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: -30° to 30°, tilt: 0° to 75°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | Built-in microphone(-IU) | Built-in microphone(-IU) | Built-in microphone(-IU) | Built-in microphone(-IU) | " 1 In, 1 Out(-S) Built-in microphone" | " 1 In, 1 Out(-S) Built-in microphone" |
| Alarm I/O | - | - | - | - | 1 In, 1 Out(-S) | 1 In, 1 Out(-S) |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |





| Model | DS-2CD2563G2-I(S) | DS-2CD2583G2-I(S) | DS-2CD2623G2-IZS | DS-2CD2643G2-IZS | DS-2CD2663G2-IZS | DS-2CD2683G2-IZS |
|-----------------------|--|--|---|--|--|--|
| Image |  AcuSense |  AcuSense |  AcuSense |  AcuSense |  AcuSense |  AcuSense |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS |
| Resolution | 3200 × 1800 | 3840 × 2160 | 1920 × 1080 | 2688 × 1520 | 3200 × 1800 | 3840 × 2160 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8mm, 4 mm | 2.8mm, 4 mm | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm |
| FOV | 2.8 mm, horizontal FOV 107.1°, vertical FOV 57°, diagonal FOV 127.6° 4 mm, horizontal FOV 87.2°, vertical FOV 46.2°, diagonal FOV 104.8° | 2.8 mm, horizontal FOV 107.1°, vertical FOV 57°, diagonal FOV 127.6° 4 mm, horizontal FOV 87.2°, vertical FOV 46.2°, diagonal FOV 104.8° | horizontal FOV 106.6° to 31.7°, vertical FOV 54.7° to 17.7°, diagonal FOV 130.3° to 36.4° | horizontal FOV 95.8° to 29.2°, vertical FOV 50.6° to 16.4°, diagonal FOV 114.6° to 33.4° | horizontal FOV 105.9° to 31.6°, vertical FOV 55° to 17.8°, diagonal FOV 129.1° to 36.2° | horizontal FOV 108° to 30.3°, vertical FOV 56.3° to 17.1°, diagonal FOV 130.8° to 34.8° |
| Max. IR Range | 30 m | 30 m | 60 m | 60 m | 60 m | 60 m |
| VCA | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection |
| Frame Rate | 50Hz: 20fps (3200 × 1800), 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800), 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3840 × 2160), 25fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3840 × 2160), 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3200 × 1800), 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800), 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3840 × 2160), 25fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3840 × 2160), 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP67, IK08 | IP67, IK08 | IP67, IK10 | IP67, IK10 | IP67, IK10 | IP67, IK10 |
| Angle Adjustment | Pan: -30° to 30°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: -30° to 30°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | 1 In, 1 Out(-S) Built-in microphone | 1 In, 1 Out(-S) Built-in microphone | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out |
| Alarm I/O | 1 In, 1 Out(-S) | 1 In, 1 Out(-S) | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3at, class 4) | 12 VDC ± 25%, PoE (802.3at, class 4) | 12 VDC ± 25%, PoE (802.3at, class 4) | 12 VDC ± 25%, PoE (802.3at, class 4) |




| Model | DS-2CD2723G2-IZS | DS-2CD2743G2-IZS | DS-2CD2763G2-IZS | DS-2CD2783G2-IZS | DS-2CD2H23G2-IZS | DS-2CD2H43G2-IZS |
|-----------------------|--|--|--|--|--|--|
| Image |  NEW AcuSense |  NEW AcuSense |  NEW AcuSense |  NEW AcuSense |  NEW AcuSense |  NEW AcuSense |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 2688 × 1520 | 3200 × 1800 | 3840 × 2160 | 1920 × 1080 | 2688 × 1520 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm |
| FOV | horizontal FOV 106.6° to 31.7°, vertical FOV 54.7° to 17.7°, diagonal FOV 130.3° to 36.4° | horizontal FOV 95.8° to 29.2°, vertical FOV 50.6° to 16.4°, diagonal FOV 114.6° to 33.4° | horizontal FOV 105.9° to 31.6°, vertical FOV 55° to 17.8°, diagonal FOV 129.1° to 36.2° | horizontal FOV 108° to 30.3°, vertical FOV 56.3° to 17.1°, diagonal FOV 130.8° to 34.8° | horizontal FOV 106.6° to 31.7°, vertical FOV 54.7° to 17.7°, diagonal FOV 130.3° to 36.4° | horizontal FOV 95.8° to 29.2°, vertical FOV 50.6° to 16.4°, diagonal FOV 114.6° to 33.4° |
| Max. IR Range | 40 m | 40 m | 40 m | 40 m | 40 m | 40 m |
| VCA | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3200 × 1800), 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800), 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3840 × 2160), 25fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3840 × 2160), 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP67, IK10 | IP67, IK10 | IP67, IK10 | IP67, IK10 | IP67, IK10 | IP67, IK10 |
| Angle Adjustment | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out |
| Alarm I/O | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |






| Model | DS-2CD2H6362-IZS | DS-2CD2H8362-IZS | DS-2CD2T2362-2I/4I | DS-2CD2T4362-2I/4I | DS-2CD2T6362-2I/4I | DS-2CD2T8362-2I/4I |
|-----------------------|--|--|---|---|---|---|
| Image |  AcuSense <NEW |  AcuSense <NEW |  AcuSense <NEW |  AcuSense <NEW |  AcuSense <NEW |  AcuSense <NEW |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS |
| Resolution | 3200 × 1800 | 3840 × 2160 | 1920 × 1080 | 2688 × 1520 | 3200 × 1800 | 3840 × 2160 |
| Video Compression | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) | 0.005 Lux @ (F1.6, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8 to 12 mm | 2.8 to 12 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm | 2.8mm, 4 mm, 6 mm |
| FOV | horizontal FOV 105.9° to 31.6°, vertical FOV 55° to 17.8°, diagonal FOV 129.1° to 36.2° | horizontal FOV 108° to 30.3°, vertical FOV 56.3° to 17.1°, diagonal FOV 130.8° to 34.8° | 2.8 mm, horizontal FOV 107°, vertical FOV 57°, diagonal FOV 127° 4 mm, horizontal FOV 87°, vertical FOV 46°, diagonal FOV 104° 6 mm, horizontal FOV 54°, vertical FOV 29°, diagonal FOV 63° | 2.8 mm, horizontal FOV 103°, vertical FOV 55°, diagonal FOV 122° 4 mm, horizontal FOV 84°, vertical FOV 45°, diagonal FOV 100° 6 mm, horizontal FOV 52°, vertical FOV 28°, diagonal FOV 61° | 2.8 mm, horizontal FOV 107.1°, vertical FOV 57°, diagonal FOV 127.6° 4 mm, horizontal FOV 87.2°, vertical FOV 46.2°, diagonal FOV 104.8° 6 mm, horizontal FOV 53.9°, vertical FOV 28.8°, diagonal FOV 62.8° | 2.8 mm, horizontal FOV 107.1°, vertical FOV 57°, diagonal FOV 127.6° 4 mm, horizontal FOV 87.2°, vertical FOV 46.2°, diagonal FOV 104.8° 6 mm, horizontal FOV 53.9°, vertical FOV 28.8°, diagonal FOV 62.8° |
| Max. IR Range | 40 m | 40 m | -2I: 60 m -4I: 80 m | -2I: 60 m -4I: 80 m | -2I: 60 m -4I: 80 m | -2I: 60 m -4I: 80 m |
| VCA | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection |
| Frame Rate | 50Hz: 20fps (3200 × 1800), 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800), 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3840 × 2160), 25fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3840 × 2160), 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3200 × 1800), 25fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3200 × 1800), 30fps (2688 × 1520, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (3840 × 2160), 25fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60Hz: 20fps (3840 × 2160), 30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP67, IK10 | IP67, IK10 | IP67 | IP67 | IP67 | IP67 |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB | 256 GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | 1 In, 1 Out | 1 In, 1 Out | - | - | - | - |
| Alarm I/O | 1 In, 1 Out | 1 In, 1 Out | - | - | - | - |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |

| Model | DS-2CD206360-I | DS-2CD208360-I | DS-2CD212360-I(S) | DS-2CD214360-I(S) HOT |
|-----------------------|--|---|--|---|
| Image |  |  |  |  |
| Image Sensor | 1/2.9" Progressive Scan CMOS | 1/2.5" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS |
| Resolution | 3072 × 2048 | 3840 × 2160 | 1920 × 1080 | 2688 × 1520 |
| Video Compression | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ |
| Min. Illumination | Color:0.028 lux @(F2.0, AGC ON) | Color:0.028 lux @(F2.0, AGC ON) | Color:0.028 lux @(F2.0, AGC ON) | Color:0.018 Lux @(F1.6, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8mm, 4mm, 6mm | 2.8mm, 4mm, 6mm | 2.8mm, 4mm, 6mm | 2.8mm, 4mm, 6mm |
| FOV | 2.8 mm, horizontal FOV: 97°, vertical FOV: 63°, diagonal FOV: 120° 4 mm, horizontal FOV: 78°, vertical FOV: 50°, diagonal FOV: 97° 6 mm, horizontal FOV: 60°, vertical FOV: 39°, diagonal FOV: 75° | 2.8 mm, horizontal FOV: 102°, vertical FOV: 53°, diagonal FOV: 124° 4 mm, horizontal FOV: 79°, vertical FOV: 42°, diagonal FOV: 95° 6 mm, horizontal FOV: 50°, vertical FOV: 28°, diagonal FOV: 59° | 2.8 mm, horizontal FOV: 114°, vertical FOV: 62°, diagonal FOV: 135° 4 mm, horizontal FOV: 86°, vertical FOV: 46°, diagonal FOV: 102° 6 mm, horizontal FOV: 54°, vertical FOV: 30°, diagonal FOV: 62° | 2.8 mm, horizontal FOV: 103°, vertical FOV: 58°, diagonal FOV: 123° 4 mm, horizontal FOV: 83°, vertical FOV: 45°, diagonal FOV: 99° 6 mm, horizontal FOV: 51°, vertical FOV: 29°, diagonal FOV: 58° |
| Max. IR Range | 30 m | 30 m | 30 m | 30 m |
| VCA | Line crossing detection, intrusion detection, face detection | Line crossing detection, intrusion detection, face detection | Line crossing detection, intrusion detection, face detection | Line crossing detection, intrusion detection, face detection |
| Frame Rate | 50Hz: 20fps (3072×2048, 3072×1728, 2944×1656), 25fps (2560×1440, 1920×1080, 1280×720) 60Hz: 20fps (3072×2048, 3072×1728, 2944×1656), 30fps (2560×1440, 1920×1080, 1280×720) | 50Hz: 12.5fps (3840×2160), 20fps (3072×1728), 25fps (2560×1440, 1920×1080, 1280×720) 60Hz: 15fps (3840×2160), 20fps (3072×1728), 30fps (2560×1440, 1920×1080, 1280×720) | 50Hz: 25fps (1920×1080, 1280×960, 1280×720) 60Hz: 30fps (1920×1080, 1280×960, 1280×720) | 50Hz:25fps (2688 × 1520, 2560 × 1440, 2304 × 1296, 1920 × 1080) 60Hz: 30fps (2688 × 1520, 2560 × 1440, 2304 × 1296, 1920 × 1080) |
| Streams | 3 | 3 | 3 | 3 |
| Protection Level | IP67 | IP67 | IP67, IK10 | IP67, IK10 |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 356° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 128GB | 128GB | 128GB | 128GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | - | - | 1 In, 1 Out | 1 In, 1 Out |
| Alarm I/O | - | - | 1 In, 1 Out | 1 In, 1 Out |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |



| Model | DS-2CD212360-IU | DS-2CD214360-IU | DS-2CD216360-IU | DS-2CD218360-IU |
|-----------------------|---|---|--|---|
| Image |  NEW |  NEW |  NEW |  NEW |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.9" Progressive Scan CMOS | 1/2.5" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 2688 × 1520 | 3072 × 2048 | 3840 × 2160 |
| Video Compression | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ |
| Min. Illumination | Color: 0.028 Lux @ (F2.0, AGC ON), 0 Lux with IR | Color:0.018 Lux @ (F1.6, AGC ON) | Color:0.028 lux @(F2.0, AGC ON) | Color:0.028 lux @(F2.0, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8mm, 4mm, 6mm | 2.8mm, 4mm, 6mm | 2.8mm, 4mm, 6mm | 2.8mm, 4mm, 6mm |
| FOV | 2.8mm: horizontal FOV: 114°, vertical FOV: 62°, diagonal FOV: 135° 4 mm: horizontal FOV: 86°, vertical FOV: 46°, diagonal FOV: 102° 6 mm: horizontal FOV: 54°, vertical FOV: 30°, diagonal FOV: 62° | 2.8 mm, horizontal FOV: 103°, vertical FOV: 58°, diagonal FOV: 123° 4 mm, horizontal FOV: 83°, vertical FOV: 45°, diagonal FOV: 99° 6 mm, horizontal FOV: 51°, vertical FOV: 29°, diagonal FOV: 58° | 2.8 mm, horizontal FOV: 97°, vertical FOV: 63°, diagonal FOV: 120° 4 mm, horizontal FOV: 78°, vertical FOV: 50°, diagonal FOV: 97° 6 mm, horizontal FOV: 60°, vertical FOV: 39°, diagonal FOV: 75° | 2.8 mm, horizontal FOV: 102°, vertical FOV: 53°, diagonal FOV: 124° 4 mm, horizontal FOV: 79°, vertical FOV: 42°, diagonal FOV: 95° 6 mm, horizontal FOV: 50°, vertical FOV: 28°, diagonal FOV: 59° |
| Max. IR Range | 30 m | 30 m | 30 m | 30 m |
| VCA | Line crossing detection, intrusion detection, face detection | Line crossing detection, intrusion detection, face detection | Line crossing detection, intrusion detection, face detection | Line crossing detection, intrusion detection, face detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz:25fps (2688 × 1520, 2560 × 1440, 2304 × 1296, 1920 × 1080) 60Hz: 30fps (2688 × 1520, 2560 × 1440, 2304 × 1296, 1920 × 1080) | 50Hz: 20fps (3072×2048, 3072×1728, 2944×1656), 25fps (2560×1440, 1920×1080, 1280×720) 60Hz: 20fps (3072×2048, 3072×1728, 2944×1656), 30fps (2560×1440, 1920×1080, 1280×720) | 50Hz: 12.5fps (3840×2160), 20fps (3072×1728), 25fps (2560×1440, 1920×1080, 1280×720) 60Hz: 15fps (3840×2160), 20fps (3072×1728), 30fps (2560×1440, 1920×1080, 1280×720) |
| Streams | 3 | 3 | 3 | 3 |
| Protection Level | IP66, IK10 | IP66, IK10 | IP66, IK10 | IP66, IK10 |
| Angle Adjustment | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 356° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 357° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 358° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 128GB | 128GB | 128GB | 128GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | Built in microphone | Built in microphone | Built in microphone | Built in microphone |
| Alarm I/O | - | - | - | - |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |

| Model | DS-2CD236360-I(U) | DS-2CD238360-I(U) | DS-2CD2T2360-I5/I8 | DS-2CD2T4360-I5/I8 |
|-----------------------|--|---|---|--|
| Image |  |  |  |  HOT |
| Image Sensor | 1/2.9" Progressive Scan CMOS | 1/2.5" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS |
| Resolution | 3072 × 2048 | 3840 × 2160 | 1920 × 1080 | 2688 × 1520 |
| Video Compression | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ |
| Min. Illumination | Color:0.028 lux @(F2.0, AGC ON) | Color:0.028 lux @(F2.0, AGC ON) | Color:0.028 Lux @(F2.0, AGC ON) | Color:0.018 Lux @(F1.6, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8mm, 4mm, 6mm | 2.8mm, 4mm, 6mm | 2.8mm, 4mm, 6mm, 8mm | 2.8mm, 4mm, 6mm, 8mm |
| FOV | 2.8 mm, horizontal FOV: 97°, vertical FOV: 63°, diagonal FOV: 120° 4 mm, horizontal FOV: 78°, vertical FOV: 50°, diagonal FOV: 97° 6 mm, horizontal FOV: 60°, vertical FOV: 39°, diagonal FOV: 75° | 2.8 mm, horizontal FOV: 102°, vertical FOV: 53°, diagonal FOV: 124° 4 mm, horizontal FOV: 79°, vertical FOV: 42°, diagonal FOV: 95° 6 mm, horizontal FOV: 50°, vertical FOV: 28°, diagonal FOV: 59° | 2.8 mm, horizontal FOV: 114°, vertical FOV: 62°, diagonal FOV: 135° 4 mm, horizontal FOV: 86°, vertical FOV: 46°, diagonal FOV: 102° 6 mm, horizontal FOV: 54°, vertical FOV: 30°, diagonal FOV: 62° 8 mm, horizontal FOV: 43°, vertical FOV: 23°, diagonal FOV: 50° | 2.8 mm, horizontal FOV: 103°, vertical FOV: 58°, diagonal FOV: 123° 4 mm, horizontal FOV: 83°, vertical FOV: 45°, diagonal FOV: 99° 6 mm, horizontal FOV: 51°, vertical FOV: 29°, diagonal FOV: 58° 8 mm, horizontal FOV: 39°, vertical FOV: 22°, diagonal FOV: 45° |
| Max. IR Range | 30 m | 30 m | -I5: 50m -I8: 80m | -I5: 50m -I8: 80m |
| VCA | Line crossing detection, intrusion detection, face detection | Line crossing detection, intrusion detection, face detection | Line crossing detection, intrusion detection, face detection | Line crossing detection, intrusion detection, face detection |
| Frame Rate | 50Hz: 20fps (3072×2048, 3072×1728, 2944×1656), 25fps (2560×1440, 1920×1080, 1280×720) 60Hz: 20fps (3072×2048, 3072×1728, 2944×1656), 30fps (2560×1440, 1920×1080, 1280×720) | 50Hz: 12.5fps (3840×2160), 20fps (3072×1728), 25fps (2560×1440, 1920×1080, 1280×720) 60Hz: 15fps (3840×2160), 20fps (3072×1728), 30fps (2560×1440, 1920×1080, 1280×720) | 50Hz: 25fps (1920×1080, 1280×960, 1280×720) 60Hz: 30fps (1920×1080, 1280×960, 1280×720) | 50Hz:25fps (2688 × 1520, 2560 × 1440, 2304 × 1296, 1920 × 1080) 60Hz: 30fps (2688 × 1520, 2560 × 1440, 2304 × 1296, 1920 × 1080) |
| Streams | 3 | 3 | 3 | 3 |
| Protection Level | -I: IP67 -IU: IP66 | -I: IP67 -IU: IP66 | IP67 | IP67 |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 100°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 100°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 128GB | 128GB | 128GB | 128GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | -U: Built in microphone | -U: Built in microphone | - | - |
| Alarm I/O | - | - | - | - |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |

| Model | DS-2CD242360-I(W) | DS-2CD244360-I(W) | DS-2CD246360-I(W) |
|-----------------------|---|---|---|
| Image |  |  |  |
| Image Sensor | 1/2.7" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.9" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 2688 × 1520 | 3072 × 2048 |
| Video Compression | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ |
| Min. Illumination | Color:0.028 lux @(F2.0, AGC 0N) | Color:0.018 lux @(F1.6, AGC 0N) | Color:0.028 lux @(F2.0, AGC 0N) |
| WDR | 120dB | 120dB | 120dB |
| Lens | 2.8 mm | 2.8 mm | 2.8 mm |
| FOV | 2.8 mm: horizontal FOV: 114°, vertical FOV: 62°, diagonal FOV: 135° 4 mm, horizontal FOV: 86°, vertical FOV: 46°, diagonal FOV: 102° | 2.8 mm: horizontal FOV: 98°, vertical FOV: 55°, diagonal FOV: 114° 4 mm, horizontal FOV: 78°, vertical FOV: 42°, diagonal FOV: 93° | 2.8 mm: horizontal FOV: 97°, vertical FOV: 67°, diagonal FOV: 121° 4 mm, horizontal FOV: 78°, vertical FOV: 53°, diagonal FOV: 98° |
| Max. IR Range | 10 m | 10 m | 10 m |
| VCA | Line crossing detection, intrusion detection, face detection | Line crossing detection, intrusion detection, face detection | Line crossing detection, intrusion detection, face detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (2688 × 1520, 2560 × 1440, 2304 × 1296, 1920 × 1080) 60Hz: 30fps (2688 × 1520, 2560 × 1440, 2304 × 1296, 1920 × 1080) | 50Hz: 20 fps (3072 × 2048, 3072 × 1728, 2944 × 1656), 25 fps (2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (3072 × 2048, 3072 × 1728, 2944 × 1656), 30fps (2560 × 1440, 1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 |
| Protection Level | - | - | - |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° |
| Operating Temperature | -10 °C to +40 °C (14 °F to +104 °F) | -10 °C to +40 °C (14 °F to +104 °F) | -10 °C to +40 °C (14 °F to +104 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 128GB | 128GB | 128GB |
| Indoor/Outdoor | Indoor | Indoor | Indoor |
| Audio I/O | 1 built-in mic, 1 built-in speaker | 1 built-in mic, 1 built-in speaker | 1 built-in mic, 1 built-in speaker |
| Alarm I/O | - | - | - |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |

| Model | DS-2CD256360-I(W)(S) | DS-2CD262361-IZ(S) | DS-2CD264361-IZ(S) | DS-2CD266361-IZ(S) | DS-2CD268361-IZ(S) |
|-----------------------|--|---|--|--|---|
| Image |  |  |  HOT |  |  |
| Image Sensor | 1/2.9" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.9" Progressive Scan CMOS | 1/2.5" Progressive Scan CMOS |
| Resolution | 3072 × 2048 | 1920 × 1080 | 2688 × 1520 | 3072 × 2048 | 3840 × 2160 |
| Video Compression | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ |
| Min. Illumination | Color:0.028 lux @(F2.0, AGC ON) | Color: 0.018 Lux @ (F1.6, AGC ON), 0 Lux with IR | Color: 0.018 Lux @ (F1.6, AGC ON), 0 Lux with IR | Color: 0.018 Lux @ (F1.6, AGC ON), 0 Lux with IR | Color: 0.018 Lux @ (F1.6, AGC ON), 0 Lux with IR |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8mm, 4mm, 6mm | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm |
| FOV | 2.8 mm: Horizontal field of view: 97°, Vertical field of view: 67°, Diagonal field of view: 121° 4 mm: Horizontal field of view: 78°, Vertical field of view: 53°, Diagonal field of view: 98° 6 mm: Horizontal field of view: 60°, Vertical field of view: 41°, Diagonal field of view: 76° | horizontal FOV: 110° to 31° vertical FOV: 58° to 18° diagonal FOV: 136° to 36° | horizontal FOV: 104° to 29° vertical FOV: 55° to 17° diagonal FOV: 125° to 34° | Horizontal field of view: 88° to 27° Vertical field of view: 56° to 18° Diagonal field of view: 110° to 33° | Horizontal field of view: 105° to 34.5° Vertical field of view: 55° to 19° Diagonal field of view: 125° to 40° |
| Max. IR Range | 10 m | 50 m | 50 m | 50 m | 50 m |
| VCA | Line crossing detection, intrusion detection, face detection | Line crossing detection, intrusion detection, face detection | Line crossing detection, intrusion detection, face detection | Line crossing detection, intrusion detection, face detection | Line crossing detection, intrusion detection, face detection |
| Frame Rate | 50Hz: 20 fps (3072 × 2048, 3072 × 1728, 2944 × 1656), 25 fps (2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (3072 × 2048, 3072 × 1728, 2944 × 1656), 30fps (2560 × 1440, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz:25fps (2688 × 1520, 2560 × 1440, 2304 × 1296, 1920 × 1080) 60Hz: 30fps (2688 × 1520, 2560 × 1440, 2304 × 1296, 1920 × 1080) | 50Hz: 20 fps (3072 × 2048, 3072 × 1728, 2944 × 1656), 25 fps (2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (3072 × 2048, 3072 × 1728, 2944 × 1656), 30fps (2560 × 1440, 1920 × 1080, 1280 × 720) | 50Hz: 12.5 fps (3840 × 2160), 20fps (3072 × 1728), 25 fps (2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 15 fps (3840 × 2160), 20fps (3072 × 1728), 30 fps (2560 × 1440, 1920 × 1080, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP66 | IP67 | IP67 | IP67 | IP67 |
| Angle Adjustment | Pan: -30° to +30°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 355° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 128GB | 128GB | 128GB | 128GB | 128GB |
| Indoor/Outdoor | Indoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | 2 In, 1 Out (-S) | 1 In, 1 Out (-S) | 1 In, 1 Out (-S) | 1 In, 1 Out (-S) | 1 In, 1 Out (-S) |
| Alarm I/O | 1 In, 1 Out (-S) | 1 In, 1 Out (-S) | 1 In, 1 Out (-S) | 1 In, 1 Out (-S) | 1 In, 1 Out (-S) |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3at, class 4) | 12 VDC ± 25%, PoE (802.3at, class 4) | 12 VDC ± 25%, PoE (802.3at, class 4) | 12 VDC ± 25%, PoE (802.3at, class 4) |

| Model | DS-2CD276361-IZ(S) | DS-2CD278361-IZ(S) | DS-2CD2H2361-IZ(S) | DS-2CD2H4361-IZ(S) |
|-----------------------|--|---|---|--|
| Image |  |  |  |  |
| Image Sensor | 1/2.9" Progressive Scan CMOS | 1/2.5" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS |
| Resolution | 3072 × 2048 | 3840 × 2160 | 1920 × 1080 | 2688 × 1520 |
| Video Compression | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | Color: 0.018 Lux @ (F1.6, AGC ON), 0 Lux with IR | Color: 0.018 Lux @ (F1.6, AGC ON), 0 Lux with IR | 0.018 Lux @ (F1.6, AGC ON), 0 Lux with IR | 0.018 Lux @ (F1.6, AGC ON), 0 Lux with IR |
| WDR | 120dB | 120dB | 120 dB | 120 dB |
| Lens | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm |
| FOV | Horizontal field of view: 88° to 27° Vertical field of view: 56° to 18° Diagonal field of view: 110° to 33° | Horizontal field of view: 105° to 34.5° Vertical field of view: 55° to 19° Diagonal field of view: 125° to 40° | horizontal FOV: 110° to 31° vertical FOV: 58° to 18° diagonal FOV: 136° to 36° | horizontal FOV: 104° to 29° vertical FOV: 55° to 17° diagonal FOV: 125° to 34° |
| Max. IR Range | 30 m | 30 m | 30m | 30m |
| VCA | Line crossing detection, intrusion detection, face detection | Line crossing detection, intrusion detection, face detection | Line crossing detection, intrusion detection, face detection | Line crossing detection, intrusion detection, face detection |
| Frame Rate | 50Hz: 20 fps (3072 × 2048, 3072 × 1728, 2944 × 1656), 25 fps (2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (3072 × 2048, 3072 × 1728, 2944 × 1656), 30fps (2560 × 1440, 1920 × 1080, 1280 × 720) | 50Hz: 12.5 fps (3840 × 2160), 20fps (3072 × 1728), 25 fps (2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 15 fps (3840 × 2160), 20fps (3072 × 1728), 30 fps (2560 × 1440, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz:25fps (2688 × 1520, 2560 × 1440, 2304 × 1296, 1920 × 1080) 60Hz: 30fps (2688 × 1520, 2560 × 1440, 2304 × 1296, 1920 × 1080) |
| Streams | 3 | 3 | 3 | 3 |
| Protection Level | IP67, IK10 | IP67, IK10 | IP67, IK10 | IP67, IK10 |
| Angle Adjustment | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 128GB | 128GB | 128GB | 128GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | 1 In, 1 Out (-S) | 1 In, 1 Out (-S) | 1 In, 1 Out (-S) | 1 In, 1 Out (-S) |
| Alarm I/O | 1 In, 1 Out (-S) | 1 In, 1 Out (-S) | 1 In, 1 Out (-S) | 1 In, 1 Out (-S) |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25%, PoE (802.3af, class 3) |

| Model | DS-2CD2021G1-I | DS-2CD2121G0-I(S) |
|-----------------------|--|--|
| Image |  |  |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 1920 × 1080 |
| Video Compression | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ |
| Min. Illumination | Color:0.028 Lux @(F2.0, AGC ON) | Color:0.028Lux @(F2.0, AGC ON) |
| WDR | 120dB | 120dB |
| Lens | 2.8mm, 4mm, 6mm | 2.8mm, 4mm, 6mm |
| FOV | 2.8 mm, horizontal FOV: 114°, vertical FOV: 62°, diagonal FOV: 136° 4 mm, horizontal field of view: 86°, vertical FOV: 46°, diagonal FOV: 102° 6 mm, horizontal field of view: 54.5°, vertical FOV: 31.3°, diagonal FOV: 62.3° | 2.8 mm: horizontal FOV: 115°, vertical FOV: 62°, diagonal FOV: 136° 4 mm: horizontal FOV: 86°, vertical FOV: 47°, diagonal FOV: 103° 6 mm: horizontal FOV: 55°, vertical FOV: 31°, diagonal FOV: 62° |
| Max. IR Range | 30 m | 30 m |
| VCA | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) |
| Streams | 2 | 2 |
| Protection Level | IP67 | IP67 and IK10 |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 70°, rotate: 0° to 355° |
| Operating Temperature | -30 °C to +60 °C [-22 °F to +140 °F] | -30 °C to +60 °C [-22 °F to +140 °F] |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 128GB | 128GB |
| Indoor/Outdoor | Outdoor | Outdoor |
| Audio I/O | - | 1 in ,1 out (-S model) |
| Alarm I/O | - | 1 in ,1 out (-S model) |
| Power | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25%, PoE (802.3af, class 3) |

| Model | DS-2CD232160-I/NF | DS-2CD262160-I(Z)(S) | DS-2CD272160-I(Z)(S) | DS-2CD282160 | DS-2CD242160-I | DS-2CD244160-I NEW |
|-----------------------|--|--|--|--|--|---|
| Image |  |  |  |  |  |  |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 1920 × 1080 | 1920 × 1080 | 1920 × 1080 | 1920 × 1080 | 2560 × 1440 |
| Video Compression | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG | H.265/H.265+/H.264+/H.264 / MJPEG |
| Min. Illumination | Color:0.028Lux @(F2.0, AGC ON) | Color:0.028Lux @(F2.0, AGC ON) | Color:0.028Lux @(F2.0, AGC ON) | 0.005 Lux @ (F1.2, AGC ON) | 0.028 Lux @ (F2.0, AGC ON) | 0.028 Lux @ (F2.0, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | DWDR | 120dB |
| Lens | 2.8mm, 4mm, 6mm | 2.8 to 12 mm | 2.8 to 12 mm | - | 2 mm, 2.8 mm, 4 mm | 2.8 mm |
| FOV | 2.8 mm: horizontal FOV: 103°, vertical FOV: 62°, diagonal FOV: 118° 4 mm: horizontal FOV: 90°, vertical FOV: 48°, diagonal FOV: 109° 6 mm: horizontal FOV: 55°, vertical FOV: 31°, diagonal FOV: 62° | Horizontal FOV: 99.6° to 35°, vertical FOV: 53.5° to 20°, diagonal FOV: 118.6° to 40.2° | Horizontal FOV: 99.6° to 35°, vertical FOV: 53.5° to 20°, diagonal FOV: 118.6° to 40.2° | - | 2 mm: horizontal FOV: 132°, vertical FOV: 77°, diagonal FOV: 153° 2.8 mm: horizontal FOV: 107°, vertical FOV: 57°, diagonal FOV: 126° 4 mm: horizontal FOV: 85°, vertical FOV: 45°, diagonal FOV: 101° | Horizontal FOV: 98°, vertical FOV: 55°, diagonal FOV: 114° |
| Max. IR Range | 30 m | 30 m | 30 m | - | 10 m | 10m |
| VCA | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection | - | - |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 15fps (2560 × 1440) 25fps (1920 × 1080, 1280 × 720) 60Hz: 15fps (2560 × 1440) 30fps (1920 × 1080, 1280 × 720)* |
| Streams | 2 | 2 | 2 | 2 | 2 | 2 |
| Protection Level | IP67 | IP67 | IP67,IK10 | - | - | - |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 100°, rotation: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 75°, rotation: 0° to 355° | - | Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360° | Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (22 °F to +140 °F) | -30 °C to +60 °C (22 °F to +140 °F) | -10 °C to +50 °C (14 °F to +122 °F) | -10 °C to 40°C (14 °F to 104 °F) | -10 °C to 40°C (14 °F to 104 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | - | 128GB | 128GB | 128GB | 256GB | 256GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | indoor | indoor | indoor |
| Audio I/O | - | 1 In, 1 Out | 1 In, 1 Out | 1 In, 1 Out | 1 built-in mic, 1 built-in speaker | 1 In, 1 Out |
| Alarm I/O | - | 2 In, 2 Out | 2 In, 2 Out | 1 In, 1 Out | - | - |
| Power | 12 VDC ± 25%, PoE (802.3af, class 3) | 12 VDC ± 25% PoE (802.3af, class 3) | 12 VDC ± 25% PoE (802.3af, class 3) | 12VDC/24VAC/PoE(802.3af) | 12 VDC ± 25% PoE (802.3af, class 3) | 12 VDC ± 25% PoE (802.3af, class 3)* |

Network Cameras

Value Series

Superior Performance-to-Price Monitoring





1-Series:





- > High quality imaging with up to 8 MP resolution
- > Easy to install, set up, and manage
- > Multiple functions such as built-in mic, ColorVu lite, and more meet a variety of needs

Wi-Fi Series:








- > Easy to install
- > 2 antennas provide stable and high quality images
- > ColorVu models support 24/7 colorful images, with human & vehicle classification
- > AcuSense models also support human and vehicle classification
















| Model | DS-2CD1021-I | DS-2CD102360E-I | DS-2CD102360-IUF | DS-2CD102760-L |
|-----------------------|---|---|---|---|
| Image |  |  |  |  HOT |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 1920 × 1080 | 1920 × 1080 | 1920 × 1080 |
| Video Compression | H.264/MJPEG/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ |
| Min. Illumination | Color: 0.028Lux @(F2.0, AGC ON) | Color: 0.028Lux @(F2.0, AGC ON) | Color: 0.028Lux @(F2.0, AGC ON) | Color: 0.001 Lux @(F1.0, AGC ON) |
| WDR | DWDR | DWDR | DWDR | DWDR |
| Lens | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 2.8 mm, 4 mm |
| FOV | 2.8 mm, horizontal FOV 114°, vertical FOV 62°, diagonal FOV: 135° 4 mm, horizontal FOV 87°, vertical FOV 48°, diagonal FOV: 102° | 2.8 mm, horizontal FOV 114°, vertical FOV 62°, diagonal FOV 135° 4 mm, horizontal FOV 86°, vertical FOV 46°, diagonal FOV 102° | 2.8 mm, horizontal FOV 114°, vertical FOV 62°, diagonal FOV 135° 4 mm, horizontal FOV 86°, vertical FOV 46°, diagonal FOV 102° | 2.8 mm, horizontal FOV 107°, vertical FOV 56°, diagonal FOV 127° 4 mm, horizontal FOV 84°, vertical FOV 45°, diagonal FOV 99° |
| Optical Zoom | - | - | - | - |
| Max. IR Range | 30 m | 30 m | 30 m | - |
| VCA | Motion Detection | Motion Detection | Motion Detection | Motion Detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) |
| Streams | 2 | 2 | 2 | 2 |
| Protection Level | IP67 | IP67 | IP66 | IP67 |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 180°, rotation: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 180°, rotation: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 180°, rotation: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | - | - | 256GB | - |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | - | - | 1 Build-in Microphone | - |
| Power | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 |
| Interface | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port |






| Model | DS-2CD104360-I | DS-2CD104360-IUF | DS-2CD104760-L | DS-2CD105360-I | DS-2CD105360-IUF |
|-----------------------|--|--|--|--|--|
| Image |  HOT |  HOT |  HOT |  |  |
| Image Sensor | 1/3" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS |
| Resolution | 2560 × 1440 | 2560 × 1440 | 2560 × 1440 | 2560 × 1920 | 2560 × 1920 |
| Video Compression | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ |
| Min. Illumination | Color: 0.028 Lux @ (F2.0, AGC ON) | Color: 0.028 Lux @ (F2.0, AGC ON) | Color: 0.001 Lux @ (F1.0, AGC ON) | Color: 0.028 Lux @ (F2.0; AGC ON) | Color: 0.028 Lux @ (F2.0; AGC ON) |
| WDR | 120dB | 120dB | 120 dB | 120dB | 120dB |
| Lens | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 2.8 mm, 4 mm |
| FOV | 2.8 mm, horizontal FOV 100°, vertical FOV 55°, diagonal FOV 117° 4 mm, horizontal FOV 77°, vertical FOV 42°, diagonal FOV 88° | 2.8 mm, horizontal FOV 100°, vertical FOV 55°, diagonal FOV 117° 4 mm, horizontal FOV 77°, vertical FOV 42°, diagonal FOV 88° | 2.8 mm, horizontal FOV 102°, vertical FOV 54°, diagonal FOV 121° 4 mm, horizontal FOV 80°, vertical FOV 43°, diagonal FOV 95° | 2.8 mm, horizontal FOV: 100°, vertical FOV: 74°, diagonal FOV: 130° 4 mm, horizontal field of view: 75°, vertical FOV: 55°, diagonal FOV: 98° | 2.8 mm, horizontal FOV: 100°, vertical FOV: 74°, diagonal FOV: 130° 4 mm, horizontal field of view: 75°, vertical FOV: 55°, diagonal FOV: 98° |
| Optical Zoom | - | - | - | - | - |
| Max. IR Range | 30 m | 30 m | - | 30 m | 30 m |
| VCA | Motion Detection | Motion Detection | Motion Detection | Motion Detection | Motion Detection |
| Frame Rate | 50Hz: 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1280, 1280 × 720) 60Hz: 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1280, 1280 × 720) | 50Hz: 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1280, 1280 × 720) 60Hz: 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1280, 1280 × 720) | 50Hz: 20fps (2560 × 1440) 25fps (2304 × 1296, 1920 × 1080, 1280 × 720) 60Hz: 20fps (2560 × 1440) 30fps (2304 × 1296, 1920 × 1080, 1280 × 720) | 50Hz: 12.5fps (2560 × 1920), 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1080, 1280 × 720) 60Hz: 15fps (2560 × 1920), 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1080, 1280 × 720) | 50Hz: 12.5fps (2560 × 1920), 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1080, 1280 × 720) 60Hz: 15fps (2560 × 1920), 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1080, 1280 × 720) |
| Streams | 2 | 2 | 2 | 2 | 2 |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 180°, rotation: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 180°, rotation: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 180°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 180°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to 60 °C (-22 °F to 122 °F) | -30 °C to 60 °C (-22 °F to 122 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | - | 256GB | - | - | 256GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | - | - | - | - | - |
| Power | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 |
| Interface | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port |







| Model | DS-2CD1121-I | DS-2CD112360E-I | DS-2CD114360-I | DS-2CD114360-IUF | DS-2CD115360-I | DS-2CD115360-IUF |
|-----------------------|---|---|--|--|--|--|
| Image |  |  |  HOT |  |  |  |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 1920 × 1080 | 2560 × 1440 | 2560 × 1440 | 2560 × 1920 | 2560 × 1920 |
| Video Compression | H.264/MJPEG/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ |
| Min. Illumination | Color: 0.028 Lux @(F2.0, AGC ON) | Color: 0.028Lux @(F2.0, AGC ON) | Color: 0.028 Lux @(F2.0, AGC ON) | Color: 0.028 Lux @(F2.0, AGC ON) | Color: 0.028 Lux @(F2.0, AGC ON) | Color: 0.028 Lux @(F2.0, AGC ON) |
| WDR | DWDR | DWDR | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 2.8 mm, 4 mm |
| FOV | 2.8 mm @F2.0, horizontal FOV 114°, vertical FOV 62°, diagonal FOV: 135° 4 mm @F2.0, horizontal FOV 87°, vertical FOV 48°, diagonal FOV: 102° | 2.8 mm, horizontal FOV 114°, vertical FOV 62°, diagonal FOV 135° 4 mm, horizontal FOV 86°, vertical FOV 46°, diagonal FOV 102° | 2.8 mm, horizontal FOV 100°, vertical FOV 55°, diagonal FOV 117° 4 mm, horizontal FOV 77°, vertical FOV 42°, diagonal FOV 88° | 2.8 mm, horizontal FOV 100°, vertical FOV 55°, diagonal FOV 117° 4 mm, horizontal FOV 77°, vertical FOV 42°, diagonal FOV 88° | 2.8 mm, horizontal FOV: 100°, vertical FOV: 74°, diagonal FOV: 130° 4 mm, horizontal FOV: 75°, vertical FOV: 55°, diagonal FOV: 98° | 2.8 mm, horizontal FOV: 100°, vertical FOV: 74°, diagonal FOV: 130° 4 mm, horizontal FOV: 75°, vertical FOV: 55°, diagonal FOV: 98° |
| Optical Zoom | - | - | - | - | - | - |
| Max. IR Range | 30 m | 30 m | 30 m | 30 m | 30 m | 30 m |
| VCA | Motion Detection | Motion Detection | Motion Detection | Motion Detection | Motion Detection | Motion Detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1280, 1280 × 720) 60Hz: 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1280, 1280 × 720) | 50Hz: 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1280, 1280 × 720) 60Hz: 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1280, 1280 × 720) | 50Hz: 12.5fps (2560 × 1920), 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1080, 1280 × 720) 60Hz: 15fps (2560 × 1920), 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1080, 1280 × 720) | 50Hz: 12.5fps (2560 × 1920), 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1080, 1280 × 720) 60Hz: 15fps (2560 × 1920), 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1080, 1280 × 720) |
| Streams | 2 | 2 | 2 | 2 | 2 | 2 |
| Protection Level | IP67,IK10 | IP67,IK10 | IP67,IK10 | IP67,IK10 | IP67,IK10 | IP67,IK10 |
| Angle Adjustment | Pan: 0° to 355°, tilt: 0° to 75° | Pan: 0° to 355°, tilt: 0° to 75° | Pan: 0° to 355°, tilt: 0° to 75° | Pan: 0° to 355°, tilt: 0° to 75° | Pan: 0° to 355°, tilt: 0° to 75° | Pan: 0° to 355°, tilt: 0° to 75° |
| Operating Temperature | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 122 °F) | -30 °C to 60 °C (-22 °F to 122 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | - | - | - | 256GB | - | 256GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | - | - | - | - | - | - |
| Power | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 |
| Interface | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port |






| Model | DS-2CD1321-I | DS-2CD132360E-I | DS-2CD132360-IUF | DS-2CD132760-L | DS-2CD134360-I | DS-2CD134360-IUF | DS-2CD134760-L |
|-----------------------|---|---|---|--|--|--|--|
| Image |  |  |  |  |  |  |  |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 1920 × 1080 | 1920 × 1080 | 1920 × 1080 | 2560 × 1440 | 2560 × 1440 | 2560 × 1440 |
| Video Compression | H.264/MJPEG/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG | H.265/H.264/MJPEG/H.265+/H.264+ |
| Min. Illumination | Color: 0.028 Lux @ (F2.0, AGC ON) | Color: 0.028Lux @ (F2.0, AGC ON) | Color: 0.028Lux @ (F2.0, AGC ON) | Color: 0.001 Lux @ (F1.0, AGC ON) | Color: 0.028 Lux @ (F2.0, AGC ON) | Color: 0.01 Lux @ (F1.2, AGC ON), 0.028 Lux @ (F2.0, AGC ON) | Color: 0.001 Lux @ (F1.0, AGC ON) |
| WDR | DWDR | DWDR | DWDR | DWDR | 120dB | 120dB | 120 dB |
| Lens | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 2.8 mm, 4 mm |
| FOV | 2.8 mm @F2.0, horizontal FOV 114°, vertical FOV 62°, diagonal FOV: 135° 4 mm @F2.0, horizontal FOV 87°, vertical FOV 48°, diagonal FOV: 102° | 2.8 mm, horizontal FOV 114°, vertical FOV 62°, diagonal FOV 135° 4 mm, horizontal FOV 86°, vertical FOV 46°, diagonal FOV 102° | 2.8 mm, horizontal FOV 114°, vertical FOV 62°, diagonal FOV 135° 4 mm, horizontal FOV 86°, vertical FOV 46°, diagonal FOV 102° | 2.8 mm, horizontal FOV 107°, vertical FOV 56°, diagonal FOV 127° 4 mm, horizontal FOV 84°, vertical FOV 45°, diagonal FOV 99° | 2.8 mm, horizontal FOV 100°, vertical FOV 55°, diagonal FOV 117° 4 mm, horizontal FOV 77°, vertical FOV 42°, diagonal FOV 88° | 2.8 mm, horizontal FOV 98°, vertical FOV 53°, diagonal FOV 115° 4 mm, horizontal FOV 77°, vertical FOV 42°, diagonal FOV 91° | 2.8 mm, horizontal FOV 102°, vertical FOV 54°, diagonal FOV 121° 4 mm, horizontal FOV 80°, vertical FOV 43°, diagonal FOV 95° |
| Optical Zoom | - | - | - | - | - | - | - |
| Max. IR Range | 30 m | 30 m | 30 m | - | 30 m | 30 m | - |
| VCA | Motion Detection | Motion Detection | Motion Detection | Motion Detection | Motion Detection | Motion Detection | Motion Detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1280, 1280 × 720) 60Hz: 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1280, 1280 × 720) | 50Hz: 20 fps (2560 × 1440) 25 fps (2304 × 1296, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (2560 × 1440) 30 fps (2304 × 1296, 1920 × 1080, 1280 × 720) | 50Hz: 20fps (2560 × 1440) 25fps (2304 × 1296, 1920 × 1080, 1280 × 720) 60Hz: 20fps (2560 × 1440) 30fps (2304 × 1296, 1920 × 1080, 1280 × 720) |
| Streams | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Protection Level | IP67 | IP67 | IP66 | IP67 | IP67 | IP67 | IP67 |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 75°, rotation: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotation: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotation: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotation: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotation: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotation: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 122 °F) | -30 °C to 60 °C (-22 °F to 122 °F) | -30 °C to 60 °C (-22 °F to 122 °F) | -30 °C to 60 °C (-22 °F to 140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | - | - | 256GB | - | - | 256GB | - |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | - | - | 1 Build-in Microphone | - | - | 1 Build-in Microphone | - |
| Power | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 |
| Interface | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port |

| Model | DS-2CD135360-I | DS-2CD135360-IUF | DS-2CD1T2360-I | DS-2CD1T4360-I | DS-2CD162360-IZ | DS-2CD164360-IZ | DS-2CD165360-IZ |
|-----------------------|---|---|---|--|---|--|---|
| Image |  |  |  |  |  |  |  |
| Image Sensor | 1/2.7" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS |
| Resolution | 2560 × 1920 | 2560 × 1920 | 1920 × 1080 | 2560 × 1440 | 1920 × 1080 | 2560 × 1440 | 2560 × 1920 |
| Video Compression | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ |
| Min. Illumination | Color: 0.028 Lux @(F2.0; AGC ON) | Color: 0.028 Lux @(F2.0; AGC ON) | Color: 0.028 Lux @(F2.0; AGC ON) | Color: 0.028 Lux @(F2.0; AGC ON) | Color: 0.018 Lux @(F1.6; AGC ON) | Color: 0.018 Lux @(F1.6; AGC ON) | Color: 0.02 Lux @(F1.6; AGC ON) |
| WDR | 120dB | 120dB | DWDR | 120dB | DWDR | 120dB | 120dB |
| Lens | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 4mm, 6mm | 4mm, 6mm | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm |
| FOV | 2.8 mm, horizontal FOV: 100°, vertical FOV: 74°, diagonal FOV: 130° 4 mm, horizontal FOV: 75°, vertical FOV: 55°, diagonal FOV: 98° | 2.8 mm, horizontal FOV: 100°, vertical FOV: 74°, diagonal FOV: 130° 4 mm, horizontal FOV: 75°, vertical FOV: 55°, diagonal FOV: 98° | 4 mm, horizontal FOV 86°, vertical FOV 47°, diagonal FOV 103° 6 mm, horizontal FOV 54°, vertical FOV 31°, diagonal FOV 63° | 4 mm, horizontal FOV 75°, vertical FOV 41°, diagonal FOV 88° 6 mm, horizontal FOV 49°, vertical FOV 26°, diagonal FOV 57° | Horizontal field of view: 98° to 34° Vertical field of view: 51° to 19° Diagonal field of view: 115° to 40° | Horizontal field of view: 98° to 28° Vertical field of view: 51° to 16° Diagonal field of view: 115° to 32° | Horizontal FOV: 98° to 28°, vertical FOV: 71° to 21°, diagonal FOV: 130° to 35° |
| Optical Zoom | - | - | - | - | 4x | 4x | 4x |
| Max. IR Range | 30 m | 30 m | 50 m | 50 m | 30 m | 30 m | 30 m |
| VCA | Motion Detection | Motion Detection | Motion Detection | Motion Detection | Motion Detection | Motion Detection | Motion Detection |
| Frame Rate | 50Hz:12.5fps (2560 × 1920), 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1080, 1280 × 720) 60Hz: 15fps (2560 × 1920), 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1080, 1280 × 720) | 50Hz:12.5fps (2560 × 1920), 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1080, 1280 × 720) 60Hz: 15fps (2560 × 1920), 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1080, 1280 × 720) 60Hz: 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1280, 1280 × 720) 60Hz: 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1280, 1280 × 720) | 50Hz:12.5fps (2560 × 1920), 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1080, 1280 × 720) 60Hz: 15fps (2560 × 1920), 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1080, 1280 × 720) |
| Streams | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Protection Level | IP67 | IP67 | IP67 | IP67 | IP67 | IP67 | IP67 |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 180°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 180°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 90°, rotation: 0° to 355° | Pan: 0° to 360°, tilt: 0° to 90°, rotation: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 100°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | - | 256GB | - | - | 128GB | 128GB | 128GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | - | - | - | - | - | - | - |
| Power | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 |
| Interface | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port |

| Model | DS-2CD172360-IZ | DS-2CD174360-IZ | DS-2CD175360-IZ | DS-2CD1H2360-IZ | DS-2CD1H4360-IZ | DS-2CD1H5360-IZ |
|-----------------------|---|--|--|--|--|--|
| Image |  |  HOT |  |  |  HOT |  |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 2560 × 1440 | 2560 × 1920 | 1920 × 1080 | 2560 × 1440 | 2560 × 1920 |
| Video Compression | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ | H.265/H.264/MJPEG/H.265+/H.264+ |
| Min. Illumination | Color: 0.018 Lux @ (F1.6, AGC ON) | Color: 0.018 Lux @ (F1.6, AGC ON) | Color: 0.02 Lux @ (F1.6, AGC ON) | Color: 0.02 Lux @ (F1.6, AGC ON) | Color: 0.02 Lux @ (F1.6, AGC ON) | Color: 0.02 Lux @ (F1.6, AGC ON) |
| WDR | DWDR | 120dB | 120dB | DWDR | 120dB | 120dB |
| Lens | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm | 2.8 to 12 mm |
| FOV | Horizontal field of view: 98° to 34° Vertical field of view: 51° to 19° Diagonal field of view: 116° to 40° | Horizontal field of view: 98° to 28° Vertical field of view: 51° to 16° Diagonal field of view: 115° to 32° | Horizontal FOV: 98° to 28°, vertical FOV: 71° to 21°, diagonal FOV: 130° to 35° | Horizontal FOV 108.5° to 33.2°, vertical FOV 57.5° to 18.8°, diagonal FOV 130° to 38° | Horizontal FOV 92.8° to 29°, vertical FOV 50.2° to 16.4°, diagonal FOV 109° to 32.3° | Horizontal FOV: 98° to 28°, vertical FOV: 71° to 21°, diagonal FOV: 130° to 35° |
| Optical Zoom | 4x | 4x | 4x | 4x | 4x | 4x |
| Max. IR Range | 30 m | 30 m | 30 m | 30 m | 30 m | 30 m |
| VCA | Motion Detection | Motion Detection | Motion Detection | Motion Detection | Motion Detection | Motion Detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1280, 1280 × 720) 60Hz: 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1280, 1280 × 720) | 50Hz: 12.5fps (2560 × 1920), 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1080, 1280 × 720) 60Hz: 15fps (2560 × 1920), 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1280, 1280 × 720) 60Hz: 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1280, 1280 × 720) | 50Hz: 12.5fps (2560 × 1920), 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1080, 1280 × 720) 60Hz: 15fps (2560 × 1920), 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1080, 1280 × 720) |
| Streams | 2 | 2 | 2 | 2 | 2 | 2 |
| Protection Level | IP67, IK10 | IP67, IK10 | IP67, IK10 | IP67 | IP67 | IP67 |
| Angle Adjustment | Pan: 0° to 355°, tilt: 0° to 70°, rotation: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 70°, rotation: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 70°, rotate: 0° to 355° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to 60 °C (-22 °F to 142 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | 128GB | 128GB | 128GB | 128GB | 128GB | 128GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | - | - | - | - | - | - |
| Power | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 |
| Interface | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port |

| Model | DS-2CD108360-I | DS-2CD118360-I | DS-2CD138360-I | DS-2CD108360-IUF | DS-2CD118360-IUF | DS-2CD138360-IUF |
|-----------------------|--|--|--|--|--|--|
| Image |  |  |  |  |  |  |
| Image Sensor | 1/2.5" Progressive Scan CMOS | 1/2.5" Progressive Scan CMOS | 1/2.5" Progressive Scan CMOS | 1/2.5" Progressive Scan CMOS | 1/2.5" Progressive Scan CMOS | 1/2.5" Progressive Scan CMOS |
| Resolution | 3840 × 2160 | 3840 × 2160 | 3840 × 2160 | 3840 × 2160 | 3840 × 2160 | 3840 × 2160 |
| Video Compression | H.265/H.265+/MJPEG | H.265/H.265+/MJPEG | H.265/H.265+/MJPEG | H.265/H.265+/MJPEG | H.265/H.265+/MJPEG | H.265/H.265+/MJPEG |
| Min. Illumination | 0.01 Lux @ (F2.0, AGC ON) | 0.01 Lux @ (F2.0, AGC ON) | 0.01 Lux @ (F2.0, AGC ON) | 0.01 Lux @ (F2.0, AGC ON) | 0.01 Lux @ (F2.0, AGC ON) | 0.01 Lux @ (F2.0, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB | 120dB |
| Lens | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 2.8 mm, 4 mm | 2.8 mm, 4 mm |
| FOV | 2.8 mm, horizontal FOV 102°, vertical FOV 53°, diagonal FOV 123° 4 mm, horizontal FOV 83°, vertical FOV 44°, diagonal FOV 98° | 2.8 mm, horizontal FOV 102°, vertical FOV 53°, diagonal FOV 123° 4 mm, horizontal FOV 83°, vertical FOV 44°, diagonal FOV 98° | 2.8 mm, horizontal FOV 102°, vertical FOV 53°, diagonal FOV 123° 4 mm, horizontal FOV 83°, vertical FOV 44°, diagonal FOV 98° | 2.8 mm, horizontal FOV 102°, vertical FOV 53°, diagonal FOV 123° 4 mm, horizontal FOV 83°, vertical FOV 44°, diagonal FOV 98° | 2.8 mm, horizontal FOV 102°, vertical FOV 53°, diagonal FOV 123° 4 mm, horizontal FOV 83°, vertical FOV 44°, diagonal FOV 98° | 2.8 mm, horizontal FOV 102°, vertical FOV 53°, diagonal FOV 123° 4 mm, horizontal FOV 83°, vertical FOV 44°, diagonal FOV 98° |
| Optical Zoom | - | - | - | - | - | - |
| Max. IR Range | 30 m | 30 m | 30 m | 30 m | 30 m | 30 m |
| VCA | Motion Detection, Face Detectin, Line Crossing Detection, Intrusion Detection | Motion Detection, Face Detectin, Line Crossing Detection, Intrusion Detection | Motion Detection, Face Detectin, Line Crossing Detection, Intrusion Detection | Motion Detection, Face Detectin, Line Crossing Detection, Intrusion Detection | Motion Detection, Face Detectin, Line Crossing Detection, Intrusion Detection | Motion Detection, Face Detectin, Line Crossing Detection, Intrusion Detection |
| Frame Rate | 50Hz: 12.5 fps (3840 × 2160, 2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 15 fps (3840 × 2160, 2560 × 1440, 1920 × 1080, 1280 × 720) | 50Hz: 12.5 fps (3840 × 2160, 2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 15 fps (3840 × 2160, 2560 × 1440, 1920 × 1080, 1280 × 720) | 50Hz: 12.5 fps (3840 × 2160, 2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 15 fps (3840 × 2160, 2560 × 1440, 1920 × 1080, 1280 × 720) | 50Hz: 12.5 fps (3840 × 2160, 2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 15 fps (3840 × 2160, 2560 × 1440, 1920 × 1080, 1280 × 720) | 50Hz: 12.5 fps (3840 × 2160, 2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 15 fps (3840 × 2160, 2560 × 1440, 1920 × 1080, 1280 × 720) | 50Hz: 12.5 fps (3840 × 2160, 2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 15 fps (3840 × 2160, 2560 × 1440, 1920 × 1080, 1280 × 720) |
| Streams | 2 | 2 | 2 | 2 | 2 | 2 |
| Protection Level | IP67 | IP67, IK10 | IP67 | IP67 | IP67, IK10 | IP67 |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 60° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 60° | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° |
| Operating Temperature | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) | -30 °C to 60 °C (-22 °F to 140 °F) |
| Humidity | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) | 95% or less (non-condensing) |
| Local Storage | - | - | - | 256GB | 256GB | 256GB |
| Indoor/Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Audio I/O | - | - | - | 1 Build-in Microphone | 1 Build-in Microphone | 1 Build-in Microphone |
| Power | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 | 12 VDC ± 25% PoE: 802.3af, class 3 |
| Interface | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port | 1 RJ45 10M/100M Ethernet port |

| Model | DS-2CV2Q21FD-IW | DS-2CV2U21FD-IW | DS-2CV202162-IDW | DS-2CV204162-IDW | DS-2CV202660-IDW | DS-2CV204660-IDW |
|-----------------------|--|--|--|--|---|--|
| Image |  |  |  HOT |  HOT |  HOT |  HOT |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 1920 × 1080 | 1920 × 1080 | 2560 × 1440 | 1920 × 1080 | 2560 × 1440 |
| Video Compression | H.265+/H.265/H.264+/H.264/MJPEG | H.265+/H.265/H.264+/H.264/MJPEG | H.265+/H.265/H.264+/H.264/MJPEG | H.265+/H.265/H.264+/H.264/MJPEG | H.265+/H.265/H.264+/H.264/MJPEG | H.265+/H.265/H.264+/H.264/MJPEG |
| Min. Illumination | Color: 0.028 Lux @ (F2.0, AGC ON), 0 Lux with IR | Color: 0.028 Lux @ (F2.0, AGC ON), 0 Lux with IR | Color: 0.018 Lux @ (F1.6, AGC ON), 0 Lux with IR | Color: 0.009 Lux @ (F1.6, AGC ON), 0 Lux with IR | Color: 0.009 Lux @ (F1.6, AGC ON), 0 Lux with IR | Color: 0.009 Lux @ (F1.6, AGC ON), 0 Lux with IR |
| WDR | DWDR | DWDR | DWDR | 120dB WDR | 120dB WDR | 120dB WDR |
| Lens | 2.0/2.8 mm | 2.0/2.8 mm | 2.8/4 mm | 2.8/4 mm | 2.8/4 mm | 2.8/4 mm |
| FOV | 2.0 mm, Horizontal FOV: 130°, Vertical FOV: 76°, Diagonal FOV: 147° 2.8 mm, Horizontal FOV: 112°, Vertical FOV: 60°, Diagonal FOV: 132° | 2.0 mm, Horizontal FOV: 130°, Vertical FOV: 76°, Diagonal FOV: 147° 2.8 mm, Horizontal FOV: 112°, Vertical FOV: 60°, Diagonal FOV: 132° | 2.8 mm, horizontal FOV: 112°, vertical FOV: 59°, diagonal FOV: 134°; 4 mm, horizontal FOV: 91°, vertical FOV: 48°, diagonal FOV: 109° | 2.8 mm: horizontal FOV: 97°, vertical FOV: 52°, diagonal FOV: 114°; 4 mm: horizontal FOV: 79°, vertical FOV: 42°, diagonal FOV: 93° | 2.8 mm, horizontal FOV: 101°, vertical FOV: 54°, diagonal FOV: 119°; 4 mm, horizontal FOV: 82°, vertical FOV: 44°, diagonal FOV: 97° | 2.8 mm, horizontal FOV: 97°, vertical FOV: 52°, diagonal FOV: 114°; 4 mm, horizontal FOV: 79°, vertical FOV: 42°, diagonal FOV: 93° |
| Optical Zoom | - | - | - | - | - | - |
| Max. IR Range | 10 m | 10 m | 30 m | 30 m | 30 m | 30 m |
| VCA | Motion Detection | Motion Detection | Motion detection | Motion detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2560 × 1440, 1920 × 1080, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 720); 60Hz: 30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2560 × 1440, 1920 × 1080, 1280 × 720) |
| Streams | 2 | 2 | 2 | 2 | 2 | 2 |
| Protection Level | - | - | IP 66 | IP 66 | IP 66 | IP 66 |
| Angle Adjustment | Pan: 0° to 355°; Tilt: -10° to 85° | - | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° |
| Operating Temperature | -10 °C to 40°C (14 °F to 104 °F) | -10 °C to 40°C (14 °F to 104 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | Humidity 95% or less (non-condensing) | Humidity 95% or less (non-condensing) | Humidity 95% or less (non-condensing) | Humidity 95% or less (non-condensing) | Humidity 95% or less (non-condensing) | Humidity 95% or less (non-condensing) |
| Local Storage | Built-in microSD/SDHC/SDXC slot, up to 256 GB | Built-in microSD/SDHC/SDXC slot, up to 256 GB | Built-in microSD/SDHC/SDXC slot, up to 256 GB | Built-in microSD/SDHC/SDXC slot, up to 256 GB | Built-in microSD/SDHC/SDXC slot, up to 256 GB | Built-in microSD/SDHC/SDXC slot, up to 256 GB |
| Indoor/Outdoor | Indoor | Indoor | Indoor/Outdoor | Indoor/Outdoor | Indoor/Outdoor | Indoor/Outdoor |
| Audio I/O | 1 build-in microphone, 1 build-in speaker | 1 build-in microphone, 1 build-in speaker | 1 build-in microphone, 1 build-in speaker | 1 build-in microphone, 1 build-in speaker | 1 build-in microphone, 1 build-in speaker | 1 build-in microphone, 1 build-in speaker |
| Alarm I/O | - | - | - | - | - | - |
| Power | 5 VDC ± 10 % | 5 VDC ± 10 % | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% |
| Interface | 1 RJ45 10M/100M self-adaptive Ethernet port | - | 1 RJ45 10M/100M self-adaptive Ethernet port | 1 RJ45 10M/100M self-adaptive Ethernet port | 1 RJ45 10M/100M self-adaptive Ethernet port | 1 RJ45 10M/100M self-adaptive Ethernet port |

| Model | DS-2CV202760-LDW | DS-2CV212162-IDW | DS-2CV214162-IDW | DS-2CV212660-IDW | DS-2CV214660-IDW |
|-----------------------|---|---|---|---|---|
| Image |  HOT |  HOT |  HOT |  HOT |  HOT |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 1920 × 1080 | 2560 × 1440 | 1920 × 1080 | 2560 × 1440 |
| Video Compression | H.265+/H.265/H.264+/H.264/MJPEG | H.265+/H.265/H.264+/H.264/MJPEG | H.265+/H.265/H.264+/H.264/MJPEG | H.265+/H.265/H.264+/H.264/MJPEG | H.265+/H.265/H.264+/H.264/MJPEG |
| Min. Illumination | Color: 0.001 Lux @ (F1.0, AGC ON) | Color: 0.018 Lux @ (F1.6, AGC ON), 0 Lux with IR | Color: 0.009 Lux @ (F1.6, AGC ON), 0 Lux with IR | Color: 0.009 Lux @ (F1.6, AGC ON), 0 Lux with IR | Color: 0.009 Lux @ (F1.6, AGC ON), 0 Lux with IR |
| WDR | 120dB WDR | 120dB WDR | 120dB WDR | 120dB WDR | 120dB WDR |
| Lens | 2.8/4 mm | 2.8/4 mm | 2.8/4 mm | 2.8/4 mm | 2.8/4 mm |
| FOV | 2.8 mm, horizontal FOV: 106.7°, vertical FOV: 55.5°, diagonal FOV: 126.5°; 4 mm, horizontal FOV: 83.6°, vertical FOV: 44.6°, diagonal FOV: 99.1° | 2.8 mm, horizontal FOV: 107°, vertical FOV: 57°, diagonal FOV: 127°; 4 mm, horizontal FOV: 87°, vertical FOV: 46°, diagonal FOV: 104° | 2.8 mm, horizontal FOV: 97°, vertical FOV: 52°, diagonal FOV: 114°; 4 mm, horizontal FOV: 79°, vertical FOV: 42°, diagonal FOV: 93° | 2.8 mm, horizontal FOV: 107°, vertical FOV: 57°, diagonal FOV: 127°; 4 mm, horizontal FOV: 87°, vertical FOV: 46°, diagonal FOV: 104° | 2.8 mm, horizontal FOV: 97°, vertical FOV: 52°, diagonal FOV: 114°; 4 mm, horizontal FOV: 79°, vertical FOV: 42°, diagonal FOV: 93° |
| Optical Zoom | - | - | - | - | - |
| Max. IR Range | - | 30 m | 30 m | 30 m | 30 m |
| VCA | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Motion detection | Motion detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection | Line crossing detection, intrusion detection, region entrance detection, region exiting detection |
| Frame Rate | 50Hz:25fps (1920 × 1080, 1280 × 720); 60Hz:30fps (1920 × 1080, 1280 × 720) | 50Hz:25fps (1920 × 1080, 1280 × 720); 60Hz:30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2560 × 1440, 1920 × 1080, 1280 × 720) | 50Hz:25fps (1920 × 1080, 1280 × 720); 60Hz:30fps (1920 × 1080, 1280 × 720) | 50Hz: 25fps (2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz:30fps (2560 × 1440, 1920 × 1080, 1280 × 720) |
| Streams | 2 | 2 | 2 | 2 | 2 |
| Protection Level | IP 66 | IP 66 | IP 66 | IP 66 | IP 66 |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360° | Pan: 0° to 355°, tilt: 0° to 75° | Pan: 0° to 355°, tilt: 0° to 75° | Pan: 0° to 355°, tilt: 0° to 75° | Pan: 0° to 355°, tilt: 0° to 75° |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) | -30 °C to +60 °C (-22 °F to +140 °F) |
| Humidity | Humidity 95% or less (non-condensing) | Humidity 95% or less (non-condensing) | Humidity 95% or less (non-condensing) | Humidity 95% or less (non-condensing) | Humidity 95% or less (non-condensing) |
| Local Storage | Built-in microSD/SDHC/SDXC slot, up to 256 GB | Built-in microSD/SDHC/SDXC slot, up to 256 GB | Built-in microSD/SDHC/SDXC slot, up to 256 GB | Built-in microSD/SDHC/SDXC slot, up to 256 GB | Built-in microSD/SDHC/SDXC slot, up to 256 GB |
| Indoor/Outdoor | Indoor/Outdoor | Indoor/Outdoor | Indoor/Outdoor | Indoor/Outdoor | Indoor/Outdoor |
| Audio I/O | 1 build-in microphone, 1 build-in speaker | 1 build-in microphone, 1 build-in speaker | 1 build-in microphone, 1 build-in speaker | 1 build-in microphone, 1 build-in speaker | 1 build-in microphone, 1 build-in speaker |
| Alarm I/O | - | - | - | - | - |
| Power | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% | 12 VDC ± 25% |
| Interface | 1 RJ45 10M/100M self-adaptive Ethernet port | 1 RJ45 10M/100M self-adaptive Ethernet port | 1 RJ45 10M/100M self-adaptive Ethernet port | 1 RJ45 10M/100M self-adaptive Ethernet port | 1 RJ45 10M/100M self-adaptive Ethernet port |

PTZ Dome Cameras

112 Pro Series (EasyIP)

118 Value Series










Network PTZ Dome Cameras







Pro Series (EasyIP)






Almost all of the Pro Series PTZ Cameras are equipped with "powered-by-DarkFighter" technology, even ColorVu technology, making low-light monitoring an easy task. With abundant options for various camera sizes and amazing zoom capability, Pro Series cameras provide the ideal solution for hundreds of scenarios.





- > Multiple designs for indoor or outdoor scenarios (5-, 4-, and 3-inch)
- > Almost all products support Powered by DarkFighter.
- > Min. illumination: Color: 0.005 lux @ (F1.6, AGC ON) B/W: 0.001 lux @ (F1.6, AGC ON) IR: 0 lux
- > Hikvision ColorVu technology
- > H.265+ / H.265 codec
- > Up to 2592×1944 (5 MP) resolution
- > More zoom ratio options – 32x / 25x / 15x / 4x - Auto-tracking technology (supported by specific products)
- > Various VCA rules: face detection, intrusion detection, line crossing detection, region entrance detection, region exiting detection, object removal detection, unattended baggage detection, audio exception detection
- > Supports ONVIF and CGI
- > Supports Hikvision SDK and Third-Party Management Platform
- > 4", 5" IR models (S5) support false alarm reduction and human & vehicle classification








| Model | DS-2DE5225W-AE | DS-2DE5232W-AE | DS-2DE5425W-AE | DS-2DE5225IW-AE | DS-2DE5232IW-AE | DS-2DE5425IW-AE | DS-2DE5432IW-AE |
|------------------------------|--|--|--|---|---|--|--|
| Image |  |  |  |  |  |  |  |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.5" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.5" Progressive Scan CMOS | 1/2.5" Progressive Scan CMOS |
| Resolution | 1920×1080 | 1920×1080 | 2560 × 1440 | 1920×1080 | 1920×1080 | 2560 × 1440 | 2560 × 1440 |
| Video Compression | Main Stream: H.265+/H.265/ H.264+/H.264 | Main Stream: H.265+/H.265/ H.264+/H.264 | Main Stream: H.265+/H.265/ H.264+/H.264 | Main Stream: H.265+/H.265/ H.264+/H.264 | Main Stream: H.265+/H.265/ H.264+/H.264 | Main Stream: H.265+/H.265/ H.264+/H.264 | Main Stream: H.265+/H.265/ H.264+/H.264 |
| Lens | 4.8 mm to 120 mm, 25x optical | 4.8 mm to 153 mm, 32x optical | 4.8 mm to 120 mm, 25x optical | 4.8 mm to 120 mm, 25x optical | 4.8 mm to 153 mm, 32x optical | 4.8 mm to 120 mm, 25x optical zoom | 4.8 mm to 153 mm, 32x optical zoom |
| Angle of View | Horizontal field of view: 57.6° to 2.5° (Wide-Tele) Vertical field of view: 34.4° to 1.4° (Wide-Tele) Diagonal field of view: 64.5° to 2.9° (Wide-Tele) | Horizontal field of view: 55.6° to 2.04° (Wide-Tele) Vertical field of view: 32.4° to 1.14° (Wide-Tele) Diagonal field of view: 63° to 2.34° (Wide-Tele) | Horizontal field of view: 59.5° to 2.6° (Wide-Tele) Vertical field of view: 35.7° to 1.5° (Wide-Tele) Diagonal field of view: 66.6 to 3.0° (Wide-Tele) | Horizontal field of view: 57.6° to 2.5° (Wide-Tele) Vertical field of view: 34.4° to 1.4° (Wide-Tele) Diagonal field of view: 64.5° to 2.9° (Wide-Tele) | Horizontal field of view: 55.6° to 2.04° (Wide-Tele) Vertical field of view: 32.4° to 1.14° (Wide-Tele) Diagonal field of view: 63° to 2.34° (Wide-Tele) | Horizontal field of view: 59.5° to 2.6° (Wide-Tele) Vertical field of view: 35.7° to 1.5° (Wide-Tele) Diagonal field of view: 66.6° to 3.0° (Wide-Tele) | Horizontal field of view: 61.3° to 2.18° (Wide-Tele) Vertical field of view: 36.9° to 1.22° (Wide-Tele) Diagonal field of view: 68.4° to 2.5° (Wide-Tele) |
| Min. Illumination | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB | 120dB | 120dB |
| Max. IR Range | - | - | - | 150 m | 150 m | 150 m | 150 m |
| VCA | Face Detection, Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Object Removal Detection, Unattended Baggage Detection | Face Detection, Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Object Removal Detection, Unattended Baggage Detection | Face Detection, Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Object Removal Detection, Unattended Baggage Detection | Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Object Removal Detection, Unattended Baggage Detection, Audio Exception Detection | Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Object Removal Detection, Unattended Baggage Detection, Audio Exception Detection | Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Object Removal Detection, Unattended Baggage Detection, Audio Exception Detection | Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Object Removal Detection, Unattended Baggage Detection, Audio Exception Detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1280 × 960, 1280 × 720) | 50Hz: 25fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP66 Standard, IK10, 4000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 Standard, IK10, 4000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 Standard, IK10, 4000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 Standard, 4000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 Standard, 4000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 Standard, 4000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 Standard, 4000V Lightning Protection, Surge Protection and Voltage Transient Protection |
| Pan Range | 360° endless | 360° endless | 360° endless | 360° endless | 360° endless | 360° endless | 360° endless |
| Tilt Range | From -5° to 90° (Auto-flip) | From -5° to 90° (Auto-flip) | From -5° to 90° (Auto-flip) | From -15° to 90° (Auto-flip) | From -15° to 90° (Auto-flip) | From -15° to 90° (auto-flip) | From -15° to 90° (auto-flip) |
| Pan Speed | Configurable, from 0.1°/s to 250°/s | Configurable, from 0.1°/s to 250°/s | Configurable, from 0.1°/s to 250°/s | Configurable, from 0.1°/s to 250°/s | Configurable, from 0.1°/s to 120°/s | Configurable, from 0.1°/s to 120°/s | Configurable, from 0.1°/s to 120°/s |
| Tilt Speed | Configurable, from 0.1°/s to 150°/s | Configurable, from 0.1°/s to 150°/s | Configurable, from 0.1°/s to 150°/s | Configurable, from 0.1°/s to 150°/s | Configurable, from 0.1°/s to 80°/s | Configurable, from 0.1°/s to 80°/s | Configurable, from 0.1°/s to 80°/s |
| Operating Temperature | -30°C to 65°C (-22°F to 149°F) | -30°C to 65°C (-22°F to 149°F) | -30°C to 65°C (-22°F to 149°F) | -30°C to 65°C (-22°F to 149°F) | -30°C to 65°C (-22°F to 149°F) | -30°C to 65°C (-22°F to 149°F) | -30°C to 65°C (-22°F to 149°F) |
| Humidity | ≤ 90% | ≤ 90% | ≤ 90% | ≤ 90% | ≤ 90% | ≤ 90% | ≤ 90% |
| Local Storage | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR |
| Audio I/O | 1/1 | 1/1 | 1/1 | 1/1 | 1/1 | 1/1 | 1/1 |
| Alarm I/O | 2/1 | 2/1 | 2/1 | 2/1 | 2/1 | 2/1 | 2/1 |
| Power | 24 VAC & PoE (802.3at) Max.: 22 W | 24 VAC & PoE (802.3at) Max.: 22 W | 24 VAC & PoE (802.3at) Max.: 22 W | 24 VAC & Hi-PoE Max.: 30 W (Max. 10 W for IR) | 24 VAC & Hi-PoE Max.: 30 W (Max. 10 W for IR) | 24 VAC & Hi-PoE Max.: 30 W (Max. 10 W for IR) | 24 VAC & Hi-PoE Max.: 30 W (Max. 10 W for IR) |

| Model | DS-2DE4A204IW-DE (2.8-12mm) | DS-2DE4A204IW-DE (8-32mm) | DS-2DE4A215IW-DE | DS-2DE4A225IW-DE | DS-2DE4A404IW-DE (2.8-12mm) | DS-2DE4A404IW-DE (8-32mm) |
|-----------------------|--|--|--|--|--|--|
| Image |  DarkFighter |  DarkFighter |  |  HOT |  DarkFighter |  DarkFighter |
| Image Sensor | 1/1.9" Progressive Scan CMOS | 1/1.9" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/1.9" Progressive Scan CMOS | 1/1.9" Progressive Scan CMOS |
| Resolution | 1920×1080 | 1920×1080 | 1920×1080 | 1920×1080 | 2560 × 1440 | 2560 × 1440 |
| Video Compression | Main Stream: H.265+/H.265/H.264+/H.264 | Main Stream: H.265+/H.265/H.264+/H.264 | Main Stream: H.265+/H.265/H.264+/H.264 | Main Stream: H.265+/H.265/H.264+/H.264 | Main Stream: H.265+/H.265/H.264+/H.264 | Main Stream: H.265+/H.265/H.264+/H.264 |
| Lens | 2.8 mm to 12 mm, 4x Optical | 8 mm to 32 mm, 4x Optical | 5 mm to 75 mm, 15x optical | 4.8 mm to 120 mm, 25x optical | 2.8 mm to 12 mm, 4x optical zoom | 8 mm to 32 mm, 4x optical zoom |
| Angle of View | Horizontal field of view: 83° to 31° (wide-tele) Vertical field of view: 45° to 18° (wide-tele) Diagonal field of view: 98° to 36° (wide-tele) | Horizontal field of view: 42° to 13° (wide-tele) Vertical field of view: 25° to 8° (wide-tele) Diagonal field of view: 51° to 15° (wide-tele) | Horizontal field of view: 53.8° to 4.0° (wide-tele) Vertical field of view: 31.9° to 2.3° (wide-tele) Diagonal field of view: 60.4° to 4.6° (wide-tele) | Horizontal field of view: 57.6° to 2.5° (Wide-Tele) Vertical field of view: 34.4° to 1.4° (Wide-Tele) Diagonal field of view: 64.5° to 2.9° (Wide-Tele) | Horizontal field of view: 69.5° to 26.48° (Wide-Tele) Vertical field of view: 38° to 14.94° (Wide-Tele) Diagonal field of view: 81.2° to 20.38° (Wide-Tele) | Horizontal field of view: 36° to 11.56° (Wide-Tele) Vertical field of view: 20° to 6.6° (Wide-Tele) Diagonal field of view: 41.4° to 13.18° (Wide-Tele) |
| Min. Illumination | Color: 0.002 Lux @(F1.6, AGC ON) | Color: 0.002 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.002 Lux @(F1.6, AGC ON) | Color: 0.002 Lux @(F1.6, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | DWDR | DWDR |
| Max. IR Range | 50 m | 50 m | 50 m | 50 m | 50 m | 50 m |
| VCA | Intrusion Detection, Line Crossing Detection, Region Exiting Detection, Region Entrance Detection | Intrusion Detection, Line Crossing Detection, Audio Exception Detection, Region Entrance Detection, Region Exiting Detection, Face Detection | Audio Exception Detection, Face Detection, Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Unattended Baggage Detection, Object Removal Detection | Audio Exception Detection, Face Detection, Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Unattended Baggage Detection, Object Removal Detection | Audio Exception Detection, Face Detection, Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Unattended Baggage Detection, Object Removal Detection | Audio Exception Detection, Face Detection, Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Unattended Baggage Detection, Object Removal Detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP66 Standard; 4000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 Standard; 4000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 Standard; 4000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 Standard; 4000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 Standard; 4000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 Standard; 4000V Lightning Protection, Surge Protection and Voltage Transient Protection |
| Pan Range | 360° endless | 360° endless | 360° endless | 360° endless | 360° endless | 360° endless |
| Tilt Range | From -5° to 90° | From -5° to 90° | From -5° to 90° (Auto-flip) | From -5° to 90° (Auto-flip) | From -5° to 90° (Auto-flip) | From -5° to 90° |
| Pan Speed | Configurable, from 0.1°/s to 300°/s, Preset Speed: 350°/s | Configurable, from 0.1°/s to 300°/s, Preset Speed: 350°/s | Configurable, from 0.1°/s to 300°/s, Preset Speed: 350°/s | Configurable, from 0.1°/s to 300°/s, Preset Speed: 350°/s | Configurable, from 0.1°/s to 300°/s, Preset Speed: 350°/s | Configurable, from 0.1°/s to 300°/s, Preset Speed: 350°/s |
| Tilt Speed | Configurable, from 0.1°/s to 160°/s, Preset Speed: 200°/s | Configurable, from 0.1°/s to 160°/s, Preset Speed: 200°/s | Configurable, from 0.1°/s to 160°/s, Preset Speed: 200°/s | Configurable, from 0.1°/s to 160°/s, Preset Speed: 200°/s | Configurable, from 0.1°/s to 160°/s, Preset Speed: 200°/s | Configurable, from 0.1°/s to 160°/s, Preset Speed: 200°/s |
| Operating Temperature | -30°C to 65°C (-22°F to 149°F) | -30°C to 65°C (-22°F to 149°F) | -30°C to 65°C (-22°F to 149°F) | -30°C to 65°C (-22°F to 149°F) | -30°C to 65°C (-22°F to 149°F) | -30°C to 65°C (-22°F to 149°F) |
| Humidity | ≤ 90% | ≤ 90% | ≤ 90% | ≤ 90% | ≤ 90% | ≤ 90% |
| Local Storage | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 128 GB; NAS (NFS, SMB/ CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 128 GB; NAS (NFS, SMB/ CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR |
| Audio I/O | 1/1 | 1/1 | 1/1 | 1/1 | 1/1 | 1/1 |
| Alarm I/O | 2/2 | 2/2 | - | 2/2 | 2/2 | 2/2 |
| Power | 12 VDC & PoE (802.3at) Max.: 18 W (Max. 5 W for IR) | 12 VDC & PoE (802.3at) Max.: 18 W (Max. 5 W for IR) | 12 VDC & PoE (802.3at) Max.: 18 W (Max. 5 W for IR) | 12 VDC & PoE (802.3at) Max.: 18 W (Max. 5 W for IR) | 12 VDC & PoE (802.3at) Max.: 18 W (Max. 5.5 W for IR) | 12 VDC & PoE (802.3at) Max.: 18 W (Max. 5.5 W for IR) |

| Model | DS-2DE4A425IW-DE | DS-2DE4215IW-DE | DS-2DE4225IW-DE | DS-2DE4415IW-DE | DS-2DE4425IW-DE |
|-----------------------|--|--|--|--|--|
| Image |  |  |  |  |  |
| Image Sensor | 1/2.5" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.5" Progressive Scan CMOS | 1/2.5" Progressive Scan CMOS |
| Resolution | 2560 × 1440 | 1920×1080 | 1920×1080 | 2560 × 1440 | 2560 × 1440 |
| Video Compression | Main Stream: H.265+ /H.265/H.264+ /H.264 | Main Stream: H.265+ /H.265/H.264+ /H.264 | Main Stream: H.265+ /H.265/H.264+ /H.264 | Main Stream: H.265+ /H.265/H.264+ /H.264 | Main Stream: H.265+ /H.265/H.264+ /H.264 |
| Lens | 4.8 mm to 120 mm, 25x optical zoom | 5 mm to 75 mm, 15x optical zoom | 4.8 mm to 120 mm, 25x optical zoom | 5 mm to 75 mm, 15x optical zoom | 4.8 mm to 120 mm, 25x optical zoom |
| Angle of View | Horizontal field of view: 57.6° to 2.5° (Wide-Tele) Vertical field of view: 34.4° to 1.4° (Wide-Tele) Diagonal field of view: 64.5° to 2.9° (Wide-Tele) | Horizontal field of view: 53.8° to 4° (Wide-Tele) Vertical field of view: 31.9° to 2.3° (Wide-Tele) Diagonal field of view: 60.4° to 4.6° (Wide-Tele) | Horizontal field of view: 57.6° to 2.5° (Wide-Tele) Vertical field of view: 34.4° to 1.4° (Wide-Tele) Diagonal field of view: 64.5° to 2.9° (Wide-Tele) | Horizontal field of view: 53.8° to 4° (Wide-Tele) Vertical field of view: 31.9° to 2.3° (Wide-Tele) Diagonal field of view: 60.4° to 4.6° (Wide-Tele) | Horizontal field of view: 59.5° to 2.6° (Wide-Tele) Vertical field of view: 35.7° to 1.5° (Wide-Tele) Diagonal field of view: 66.6 to 3.0° (Wide-Tele) |
| Min. Illumination | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB | 120dB |
| Max. IR Range | 50 m | 100 m | 100 m | 100 m | 100 m |
| VCA | Audio Exception Detection, Face Detection, Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Unattended Baggage Detection, Object Removal Detection | Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Object Removal Detection, Unattended Baggage Detection | Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Object Removal Detection, Unattended Baggage Detection | Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Object Removal Detection, Unattended Baggage Detection | Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Object Removal Detection, Unattended Baggage Detection, Audio Exception Detection |
| Frame Rate | 50Hz: 25fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1280 × 960, 1280 × 720) | 50Hz: 25fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP66 Standard, 4000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 Standard, 4000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 Standard, 4000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 Standard, 4000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 Standard, 4000V Lightning Protection, Surge Protection and Voltage Transient Protection |
| Pan Range | 360° endless | 360° endless | 360° endless | 360° endless | 360° endless |
| Tilt Range | From -5° to 90° (Auto-flip) | From -15° to 90° (Auto-flip) | From -15° to 90° (Auto-flip) | From -15° to 90° (Auto-flip) | From -15° to 90° (Auto-flip) |
| Pan Speed | Configurable, from 0.1°/s to 300°/s Preset Speed: 350°/s | Configurable, from 0.1°/s to 80°/s, Preset speed: 80°/s | Configurable, from 0.1°/s to 80°/s, Preset speed: 80°/s | Configurable, from 0.1°/s to 80°/s, Preset speed: 80°/s | Configurable, from 0.1°/s to 80°/s, Preset speed: 80°/s |
| Tilt Speed | Configurable, from 0.1°/s to 160°/s Preset Speed: 200°/s | Configurable, from 0.1°/s to 80°/s Preset Speed: 80°/s | Configurable, from 0.1°/s to 80°/s Preset Speed: 80°/s | Configurable, from 0.1°/s to 80°/s Preset Speed: 80°/s | Configurable, from 0.1°/s to 80°/s Preset Speed: 80°/s |
| Operating Temperature | -30°C to 65°C (-22°F to 149°F) | -30°C to 65°C (-22°F to 149°F) | -30°C to 65°C (-22°F to 149°F) | -30°C to 65°C (-22°F to 149°F) | -30°C to 65°C (-22°F to 149°F) |
| Humidity | ≤ 90% | ≤ 90% | ≤ 90% | ≤ 90% | ≤ 90% |
| Local Storage | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/CIFS), ANR |
| Audio I/O | 1/1 | - | 1/1 | - | 1/1 |
| Alarm I/O | 2/2 | - | - | - | - |
| Power | 12 VDC & PoE (802.3at) Max.: 18 W (Max. 5 W for IR) | 12 VDC & PoE (802.3at) Max.: 18 W (Max. 7 W for IR) | 12 VDC & PoE (802.3at) Max.: 18 W (Max. 7 W for IR) | 12 VDC & PoE (802.3at) Max.: 18 W (Max. 7 W for IR) | 12 VDC & PoE (802.3at) Max.: 18 W (Max. 7 W for IR) |

| Model | DS-2DE4215W-DE(3) | DS-2DE4225W-DE(3) | DS-2DE4415W-DE3 | DS-2DE4425W-DE |
|-----------------------|--|--|--|--|
| Image |  |  |  |  |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.5" Progressive Scan CMOS | 1/2.5" Progressive Scan CMOS |
| Resolution | 1920×1080 | 1920×1080 | 2560 × 1440 | 2560 × 1440 |
| Video Compression | Main Stream: H.265+/H.265/H.264+/H.264 | Main Stream: H.265+/H.265/H.264+/H.264 | Main Stream: H.265+/H.265/H.264+/H.264 | Main Stream: H.265+/H.265/H.264+/H.264 |
| Lens | 5 mm to 75 mm, 15× optical zoom | 4.8 mm to 120 mm, 25× optical zoom | 5 mm to 75 mm, 15× optical zoom | 4.8 mm to 120 mm, 25× optical zoom |
| Angle of View | Horizontal field of view: 53.8° to 4° (Wide-Tele) Vertical field of view: 31.9° to 2.3° (Wide-Tele) Diagonal field of view: 60.4° to 4.6° (Wide-Tele) | Horizontal field of view: 57.6° to 2.5° (Wide-Tele) Vertical field of view: 34.4° to 1.4° (Wide-Tele) Diagonal field of view: 64.5° to 2.9° (Wide-Tele) | Horizontal field of view: 53.8° to 4° (Wide-Tele) Vertical field of view: 31.9° to 2.3° (Wide-Tele) Diagonal field of view: 60.4° to 4.6° (Wide-Tele) | Horizontal field of view: 59.5° to 2.6° (Wide-Tele) Vertical field of view: 35.7° to 1.5° (Wide-Tele) Diagonal field of view: 66.6° to 3.0° (Wide-Tele) |
| Min. Illumination | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) |
| WDR | 120dB | 120dB | 120dB | 120dB |
| Max. IR Range | - | - | - | - |
| VCA | Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Object Removal Detection, Unattended Baggage Detection | Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Object Removal Detection, Unattended Baggage Detection, Audio Exception Detection | Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Object Removal Detection, Unattended Baggage Detection | Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Object Removal Detection, Unattended Baggage Detection, Audio Exception Detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1280 × 960, 1280 × 720) | 50Hz: 25fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 |
| Protection Level | 4000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 Standard(only for outdoor models), 4000V Lightning Protection, Surge Protection and Voltage Transient Protection | 4000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 Standard, 4000 V Lightning Protection, Surge Protection and Voltage Transient Protection |
| Pan Range | 360° endless | 360° endless | 360° endless | 360° endless |
| Tilt Range | From 0° to 90° (Auto-flip) | From 0° to 90° (Auto-flip) | From 0° to 90° (Auto-flip) | From 0° to 90° (Auto-flip) |
| Pan Speed | Configurable, from 0.1°/s to 160°/s, Preset speed: 160°/s | Configurable, from 0.1°/s to 160°/s Preset speed: 160°/s | Configurable, from 0.1°/s to 160°/s Preset speed: 160°/s | Configurable, from 0.1°/s to 160°/s, Preset speed: 160°/s |
| Tilt Speed | Configurable, from 0.1°/s to 120°/s Preset Speed: 120°/s | Configurable, from 0.1°/s to 120°/s Preset Speed: 120°/s | Configurable, from 0.1°/s to 120°/s Preset Speed: 120°/s | Configurable, from 0.1°/s to 120°/s Preset Speed: 120°/s |
| Operating Temperature | Indoor Models: -10°C to 50°C (-14°F to 122°F) Outdoor Models: -30°C to 65°C (-22°F to 149°F) | Indoor Models: -10°C to 50°C (-14°F to 122°F) Outdoor Models: -30°C to 65°C (-22°F to 149°F) | -10°C to 50°C (-14°F to 122°F) | -30°C to 65°C (-22°F to 149°F) |
| Humidity | ≤ 90% | ≤ 90% | ≤ 90% | ≤ 90% |
| Local Storage | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR |
| Audio I/O | - | 1/1 | - | 1/1 |
| Alarm I/O | - | 1/1 | - | 1/1 |
| Power | 12 VDC & PoE (802.3at) Max.: 18 W | 12 VDC & PoE (802.3at) Max.: 18 W | 12 VDC & PoE (802.3at) Max.: 18 W | 12 VDC & PoE (802.3at) Max.: 18 W |

| Model | DS-2DE3A404IW-DE | DS-2DE3A404IW-DE/W | DS-2DE3204W-DE | DS-2DE3304W-DE | DS-2DE3A400BW-DE_W(F1) |
|-----------------------|--|--|--|---|--|
| Image |  HOT |  HOT |  |  |  HOT NEW |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS | 1/1.8" progressive scan CMOS |
| Resolution | 2560 × 1440 | 2560 × 1440 | 1920 × 1080 | 2048 × 1536 | 2560 × 1440 |
| Video Compression | H.265+/H.265/H.264+/H.264/MJPEG | H.265+/H.265/H.264+/H.264/MJPEG | H.265+/H.265/H.264+/H.264/MJPEG | H.265+/H.265/H.264+/H.264/MJPEG | H.265+/H.265/H.264+/H.264/MJPEG |
| Lens | 2.8 mm to 12 mm, 4 × optical zoom | 2.8 mm to 12 mm, 4 × optical zoom | 2.8 mm to 12 mm, 4 × optical zoom | 2.8 mm to 12 mm, 4 × optical zoom | 4 mm |
| Angle of View | Horizontal field of view: 96.7° to 31.6° (wide-tele) Vertical field of view: 51.1° to 17.7° (wide-tele) Diagonal field of view: 115.1° to 36.3° (wide-tele) | Horizontal field of view: 96.7° to 31.6° (wide-tele) Vertical field of view: 51.1° to 17.7° (wide-tele) Diagonal field of view: 115.1° to 36.3° (wide-tele) | Horizontal field of view: 100.5° to 32.6° (wide-tele) Vertical field of view: 52.8° to 18.3° (wide-tele) Diagonal field of view: 120.2° to 37.5° (wide-tele) | Horizontal field of view: 102° to 33° (wide-tele) Vertical field of view: 74° to 24° (wide-tele) Diagonal field of view: 135° to 41° (wide-tele) | Horizontal field of view: 88.7° Vertical field of view: 46.5° Diagonal field of view: 105.0° |
| Min. Illumination | Color: 0.005 Lux @(F1.5, AGC ON) | Color: 0.005 Lux @(F1.5, AGC ON) | Color: 0.05 Lux @(F1.5, AGC ON) | Color: 0.05 Lux @(F1.6, AGC ON) | Color: 0.0005 Lux @(F1.0, AGC ON); 0 Lux with white light |
| WDR | 120dB | 120dB | DWDR | DWDR | 120dB |
| Max. IR Range | 50 m | 50 m | - | - | 30m white light |
| VCA | Face detection, intrusion detection, line crossing detection, region entrance detection, region exiting detection, object removal detection, unattended baggage detection, audio exception detection | Face detection, intrusion detection, line crossing detection, region entrance detection, region exiting detection, object removal detection, unattended baggage detection, audio exception detection | Intrusion Detection, Line Crossing Detection, Audio Exception Detection | Intrusion detection, line crossing detection, audio exception detection, motion detection | Face capture, Intrusion detection, line crossing detection, region entrance detection, region exiting detection, unattended baggage detection, object removal detection, audio exception detection |
| Frame Rate | 50Hz: 25fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720), 50fps (1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720), 30fps (1280 × 960, 1280 × 720) | 50Hz: 25fps (2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720), 50fps (1280 × 960, 1280 × 720); 60Hz: 30fps (2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720), 60fps (1280 × 960, 1280 × 720) | 50 Hz: 25 fps (2560 × 1440, 1920 × 1080, 1280 × 960, 1280 × 720); 60 Hz: 30 fps (2560 × 1440, 1920 × 1080, 1280 × 960, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 | 3 |
| Protection Level | IP66 standard, 6000V lightning protection, surge protection and voltage transient protection | IP66 standard, 6000V lightning protection, surge protection and voltage transient protection | IP66, IK10, 4000V Lightning Protection, Surge Protection, Voltage Transient Protection | IP66, IK10, 4,000V lightning protection, surge protection and voltage transient protection | IP66; 6000 V Lightning Protection, Surge Protection and Voltage Transient Protection |
| Pan Range | 0° to 350° | 0° to 350° | 0° to 350° | 0° to 350° | 0° to 350° |
| Tilt Range | 0° to 90° | 0° to 90° | 0° to 90° | 0° to 90° | 0° to 90° |
| Pan Speed | 0.1°/s to 60°/s | 0.1°/s to 60°/s | 0.1°/s to 60°/s | 0.1°/s to 60°/s | 0.1°/s to 60°/s |
| Tilt Speed | 0.1°/s to 50°/s | 0.1°/s to 50°/s | 0.1°/s to 50°/s | 0.1°/s to 50°/s | 0.1°/s to 50°/s |
| Operating Temperature | -30°C to 60°C (-22°F to 140°F) | -30°C to 60°C (-22°F to 140°F) | -30°C to 65°C (-22°F to 149°F) | -30°C to 65°C (-22°F to 149°F) | -30°C to 65°C (-22°F to 149°F) |
| Humidity | ≤ 90% | ≤ 90% | ≤ 90% | ≤ 90% | ≤ 90% |
| Local Storage | Built-in memory card slot, support microSD/SDHC/SDXC, up to 256 GB | Built-in memory card slot, support microSD/SDHC/SDXC, up to 256 GB | Support up to 128GB Micro SD/SDHC/SDXC card | Support up to 128GB Micro SD/SDHC/SDXC card | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 512 GB |
| Audio I/O | 1/1 | 1/1 | 1/1 | 1/1 | 1/1 |
| Alarm I/O | 1/1 | 1/1 | 1/1 | 1/1 | 1/1 |
| Power | 12 VDC & PoE (802.3at) Max.: 15 W (Max. 2.4 W for IR) | 12 VDC & PoE (802.3at) Max.: 19 W (Max. 2.4 W for IR) | 12 VDC & PoE (802.3af) Max.: 8 W | 12 VDC & PoE (802.3af) Max.: 8 W | 12 VDC, 3.33 A & PoE (802.3at), 42.5 to 57 VDC, 0.6 A Max. 14 W (including max. 4 W for white light) |

Network PTZ Dome Cameras





Value Series

Easier Way to Better Security

This series features compact designs and high quality imaging to realize cost-efficiency and good user experience.

- > Up to 2560 × 1440 resolution
- > Powered by DarkFighter (except 2-inch models)
- > Min. illumination:
Color: 0.005 lux @ (F1.6, AGC ON)
B/W: 0.001 lux @ (F1.6, AGC ON) IR: 0 lux
- > Supports IR function, 4x optical zoom (2.5-inch)
- > H.265+ / H.265 codec
- > 120 dB WDR (except 2-inch models), 3D DNR, HLC, EIS, Regional Exposure, Regional Focus
- > Wi-Fi (Optional)
- > 12 VDC & PoE
- > Supports ONVIF, ISAPI, and CGI
- > Supports Hikvision SDK and Third-Party Management Platform



| Model | DS-2DE2A204IW-DE3 | DS-2DE2A404IW-DE3 | DS-2DE2A404IW-DE3/W | DS-2DE2204IW-DE3 |
|------------------------|--|--|--|--|
| Image |  |  HOT |  NEW |  |
| Image Sensor | 1/3" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/3" Progressive Scan CMOS | 1/2.8" Progressive Scan CMOS |
| Resolution | 1920 × 1080 | 2560 × 1440 | 2560 × 1440 | 1920×1080 |
| Video Compression | Main Stream: H.265+/H.265/H.264+/H.264 | Main Stream: H.265+/H.265/H.264+/H.264 | Main Stream: H.265+/H.265/H.264+/H.264 | Main Stream: H.265+/H.265/H.264+/H.264 |
| Lens | 2.8 to 12 mm, 4× optical | 2.8 to 12 mm, 4× optical | 2.8 to 12 mm, 4× optical | 2.8 to 12 mm, 4× optical |
| Angle of View | Horizontal field of view: 100.5° to 32.6° (Wide-Tele) Vertical field of view: 52.8° to 18.3° (Wide-Tele) Diagonal field of view: 120.2° to 37.5° (Wide-Tele) | Horizontal field of view: 96.7° to 31.6° (Wide-Tele) Vertical field of view: 51.1° to 17.7° (Wide-Tele) Diagonal field of view: 115.1° to 36.3° (Wide-Tele) | Horizontal field of view: 96.7° to 31.6° (Wide-Tele) Vertical field of view: 51.1° to 17.7° (Wide-Tele) Diagonal field of view: 115.1° to 36.3° (Wide-Tele) | Horizontal field of view: 100° to 25° (wide-tele) Vertical field of view: 56.3° to 14.1° (wide-tele) Diagonal field of view: 114.7° to 28.7° (wide-tele) |
| Min. Illumination | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.005 Lux @(F1.6, AGC ON) | Color: 0.05 Lux @ (F2.0, AGC ON) |
| WDR | 120dB | 120dB | 120dB | DWDR |
| Max. IR Range (meters) | 20 m | 20 m | 20 m | 20 m |
| VCA | Face detection, intrusion detection, line crossing detection, region entrance detection, region exiting detection, object removal detection, unattended baggage detection, audio exception detection | Face detection, intrusion detection, line crossing detection, region entrance detection, region exiting detection, object removal detection, unattended baggage detection, audio exception detection | Face detection, intrusion detection, line crossing detection, region entrance detection, region exiting detection, object removal detection, unattended baggage detection, audio exception detection | Intrusion Detection, Line Crossing Detection, Audio Exception Detection |
| Frame Rate | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 24fps (2560 × 1440), 30fps(2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 24fps (2560 × 1440), 30fps(2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) |
| Streams | 3 | 3 | 3 | 3 |
| Protection Level | IP66 standard, IK 10, surge protection, ±2kV Line to Gnd, ±1kV Line to Line, IEC61000-4-5 | IP66 standard, IK 10, surge protection, ±2kV Line to Gnd, ±1kV Line to Line, IEC61000-4-5 | IP66 standard, IK 10, surge protection, ±2kV Line to Gnd, ±1kV Line to Line, IEC61000-4-5 | 4000V Lightning Protection, Surge Protection and Voltage Transient Protection |
| Pan Range | 0° to 355° | 0° to 355° | 0° to 355° | 0° to 350° |
| Tilt Range | 0° to 90° | 0° to 90° | 0° to 90° | From 0° to 90° (Auto-flip) |
| Pan Speed | Configurable, from 0.1°/s to 100°/s, Preset speed: 100°/s | Configurable, from 0.1°/s to 100°/s, Preset speed: 100°/s | Configurable, from 0.1°/s to 100°/s, Preset speed: 100°/s | Configurable, from 0.1°/s to 60°/s Preset Speed: 60°/s |
| Tilt Speed | Configurable, from 0.1°/s to 100°/s Preset Speed: 100°/s | Configurable, from 0.1°/s to 100°/s Preset Speed: 100°/s | Configurable, from 0.1°/s to 100°/s Preset Speed: 100°/s | Configurable, from 0.1°/s to 50°/s Preset Speed: 50°/s |
| Operating Temperature | -20°C to 60°C (-4°F to 140°F) | -20°C to 60°C (-4°F to 140°F) | -20°C to 60°C (-4°F to 140°F) | -10°C to 50°C (-14°F to 122°F) |
| Humidity | 90% or less | 90% or less | 90% or less | 90% or less |
| Local Storage | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/ CIFS), ANR |
| Audio I/O | 1/1 | 1/1 | 1/1 | 1/1 |
| Alarm I/O | - | - | - | 1/1 |
| Power | 12 VDC & PoE (802.3af) Max.: 11.2 W (Max. 4.2 W for IR) | 12 VDC & PoE (802.3af) Max.: 11.2 W (Max. 4.2 W for IR) | 12 VDC & PoE (802.3af) Max.: 12.2 W (Max. 4.2 W for IR) | 12 VDC and PoE (802.3af) Max.: 9 W (Max. 3 W for IR) |

Panoramic Cameras

121 PanoVu Series

122 Fisheye Series







Network Panoramic Cameras

PanoVu Series

From Expansive Scenes to Detailed Close-Ups

- > 360° / 180° Monitoring
- > H.265+ codec
- > Multiple display modes
- > Lower labor costs
- > Save costs on IP address



| Model | DS-2PT3326IZ-DE3 | DS-2PT3122IZ-DE3 | DS-2PT3306IZ-DE3 | DS-2PT5326IZ-DE |
|-----------------------|---|---|--|---|
| Image |  PanoVu |  PanoVu |  PanoVu |  PanoVu |
| Image Sensor | Fixed: 3×1/2.8" Progressive Scan CMOS PTZ: 1/2.8" Progressive Scan CMOS | Fixed: 1×1/2.8" Progressive Scan CMOS PTZ: 1/2.8" Progressive Scan CMOS | 3×1/2.8" Progressive Scan CMOS | Fixed: 3×1/2.8" progressive scan CMOS PTZ: 1/2.8" progressive scan CMOS |
| Resolution | 1920×1080 | 1920×1080 | 1920×1080 | 1920 × 1080 |
| Video Compression | H.265/H.264/MJPEG | H.265/H.264/MJPEG | H.265/H.264/MJPEG | H.265 / H.264 / MJPEG |
| Min. Illumination | Color: 0.05 Lux @(F2.0, AGC ON) | Color: 0.05 Lux @(F2.0, AGC ON) | Color: 0.05 Lux @(F2.0, AGC ON) | Color: 0.005 lux @(F1.6, AGC ON) |
| WDR | Digital WDR | Digital WDR | Digital WDR | Digital WDR |
| Lens | Fixed: 2 mm PTZ: 2.8 - 12 mm | Fixed: 2 mm PTZ: 2.8 - 12 mm | 2 mm | Fixed: 4 mm PTZ: 4.7-47 mm |
| FOV | Fixed: Horizontal field of view: 128.5° Vertical field of view: 75.7° Diagonal field of view: 144° PTZ cam: Horizontal field of view: 120° to 56.6° (wild-tele) Vertical field of view: 61.8° to 31.7° (wild-tele) Diagonal field of view: 149° to 65° (wild-tele) | Panoramic cam: Horizontal field of view: 128.5° Vertical field of view: 75.7° Diagonal field of view: 144° PTZ cam: Horizontal field of view: 120° to 56.6° (wild-tele) Vertical field of view: 61.8° to 31.7° (wild-tele) Diagonal field of view: 149° to 65° (wild-tele) | Horizontal field of view: 128.5° × 3 Vertical field of view: 75.7° | Panoramic cam: Horizontal field of view: 80.7° × 3 Vertical field of view: 43.5° PTZ cam: Horizontal field of view: 58.6° to 6.4° (wide - tele) Vertical field of view: 35.1° to 3.6° (wide - tele) Diagonal field of view: 7.4° to 65.6° (wide - tele) |
| Optical Zoom | PTZ: 4X | PTZ: 4x | - | PTZ: 10x |
| Max. IR Range | 10 m | 10 m | 10 m | Panoramic cam: 30 m PTZ cam: 50 m |
| VCA | Audio Exception Detection, Intrusion Detection, Line Crossing Detection, motion detection | Audio Exception Detection, Intrusion Detection, Line Crossing Detection, motion detection | Audio Exception Detection, Intrusion Detection, Line Crossing Detection, motion detection | Audio Exception Detection, Intrusion Detection, Line Crossing Detection, motion detection |
| Frame Rate | 50Hz: 25fps (1920×1080, 1280×720, 704×576, 640×480, 352×288) 60Hz: 30fps (1920×1080, 1280×720, 704×480, 640×480, 352×240) | 50Hz: 25fps (1920×1080, 1280×720, 704×576, 640×480, 352×288) 60Hz: 30fps (1920×1080, 1280×720, 704×480, 640×480, 352×240) | 50 Hz: 20 fps (1920 × 1080, 1280 × 960, 1280 × 720) 60 Hz: 20 fps (1920 × 1080, 1280 × 960, 1280 × 720) | 50 Hz: 25 fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 576, 640 × 480, 352 × 288) 60 Hz: 30 fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 480, 640 × 480, 352 × 240) |
| Streams | 2 | 2 | 2 | 2 |
| Protection Level | - | - | - | IP66 |
| Operating Temperature | -10°C to 50°C (14°F to 122°F) | -10°C to 50°C (14°F to 122°F) | -10°C to 50°C (14°F to 122°F) | -30°C to 65°C (-22°F to 149°F), with heater on |
| Humidity | Humidity 90% or less (non-condensing) | Humidity 90% or less (non-condensing) | Humidity 90% or less (non-condensing) | Humidity 90% or less (non-condensing) |
| Local Storage | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB | Built-in memory card slot, support Micro SD / SDHC / SDXC, up to 256 GB |
| Indoor/Outdoor | Indoor | Indoor | Indoor | Outdoor |
| Audio I/O | 1-ch audio input and 1-ch audio output. | 1-ch audio input and 1-ch audio output. | 1-ch audio input and 1-ch audio output. | 1-ch audio input and 1-ch audio output. |
| Alarm I/O | - | - | - | 1-ch alarm input and 1-ch alarm output |
| Power | 12 VDC & PoE (802.3at) Max.: 24 W (Max. 6 W for IR) | 12 VDC & PoE (802.3at) Max.: 19 W (Max. 2 W for IR) | 12 VDC & PoE+ (802.3 at, class 4) Max.20 W (Max. 6 W for IR) | 12 VDC & Hi-PoE Max.: 27 W (Max. 9 W for IR) |

Network Panoramic Cameras


Fisheye Series

Single Sensor Panorama Camera

Hikvision's Fisheye Cameras offer a complete, high-resolution, 360-degree, 0-blind spots, panoramic view. They secure offices, warehouses, shops, hotel lobbies, and more with HD video monitoring without any blind areas. The resulting image is automatically dewarped for intuitive and easy use.

- > 360° / 180° overview
- > H.265+ codec
- > Multiple dewarping modes



| Model | DS-2CD2935FWD-I(S) | DS-2CD2955FWD-I(S) |
|-----------------------|--|--|
| Image |  |  |
| Image Sensor | 1/2.8" Progressive Scan CMOS | 1/2.5" Progressive Scan CMOS |
| Resolution | 2048 × 1536 | 2560 × 1920 |
| Video Compression | H.265/H.264/MJPEG/H.264+/H.265+ | H.265/H.264/MJPEG/H.264+/H.265+ |
| Min. Illumination | Color: 0.017Lux @ (F2.2, AGC ON), 0 Lux with IR on | Color: 0.034Lux @ (F2.2, AGC ON), 0 Lux with IR on |
| WDR | 120dB | 120dB |
| Lens | 1.16 mm | 1.05 mm |
| FOV | horizontal field of view: 180°, vertical field of view: 180° | horizontal field of view: 180°, vertical field of view: 180° |
| Max. IR Range | 8 m | 8 m |
| VCA | Line crossing detection, intrusion detection | Line crossing detection, intrusion detection |
| Frame Rate | 50Hz:25fps (2048 × 1536, 1600 × 1200, 1280 × 960) 60Hz:30fps (2048 × 1536, 1600 × 1200, 1280 × 960) | 50Hz: 25fps (2560 × 1920, 2048 × 1536, 1280 × 960) 60Hz: 30fps (2560 × 1920, 2048 × 1536, 1280 × 960) |
| Streams | 2 | 2 |
| Protection Level | - | - |
| Operating Temperature | -10 °C to +50 °C (-14 °F to +122 °F) | -10 °C to +50 °C (-14 °F to +122 °F) |
| Humidity | 95% or less | 95% or less |
| Local Storage | 128 GB | 128 GB |
| Indoor/Outdoor | Indoor | Indoor |
| Audio I/O | -S: 1 in, 1 out | -S: 1 in, 1 out |
| Alarm I/O | -S: 1 in, 1 out | -S: 1 in, 1 out |
| Power | 12 VDC, 0.4 A, max.5 W PoE (802.3af, 36 V to 57 V), 0.2 A to 0.1 A, max.6.5 W | 12 VDC, 0.5 A, max. 6 W PoE (802.3af, 36 V to 57 V), 0.2 A to 0.1 A, max. 7.5 W |

NVR

124 Pro Series NVRs

132 Value Series NVRs







Network Video Recorders





Pro Series NVRs

Hikvision Pro Series NVRs feature optimized H.265+ and H.264+ compression codecs, enabling highly effective bandwidth and storage management. With plug-and-play functionality, accessing IP cameras and other smart functions has never been easier. The Pro Series is the ideal solution for small to medium size businesses.

- › 4-ch human & vehicle classification on VCA results for AcuSense NVRs
- › One face recognition channel for AcuSense NVRs
- › Quick target search for AcuSense NVR and I / K / Q Series NVRs
- › Up to 16-ch @ 1080p decoding for AcuSense NVRs and I-Series, 8-ch @ 1080p decoding for K-Series (except K1), and 5-ch @ 1080p decoding for Q-Series (except Q4)
- › GUI 4.0 and E-UI, intuitive and easy-to-use interface
- › Supports automatic addition of inactive cameras
- › Up to 300 m PoE distance for I-Series and K-Series NVRs
- › ISUP protocol accessible












| Model | DS-7732NXI-I4/16P/S | DS-7732NXI-I4/S | DS-7716NXI-I4/16P/S | DS-7716NXI-I4/S |
|---------------------------------|--|--|--|--|
| Image |  |  |  |  |
| Channel No. | 32-ch | 32-ch | 16-ch | 16-ch |
| Decoding Format | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 |
| Incoming/Outgoing Bandwidth | 256/256Mbps | 256/256Mbps | 256/256Mbps | 256/256Mbps |
| Decoding Capacity | 16-ch @1080p | 16-ch @1080p | 16-ch @1080p | 16-ch @1080p |
| Recording Resolution | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/ UXGA/720p/VGA/4CIF/ DCIF/2CIF/CIF/QCIF | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/ UXGA/720p/VGA/4CIF/ DCIF/2CIF/CIF/QCIF | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/ UXGA/720p/VGA/4CIF/ DCIF/2CIF/CIF/QCIF | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/ UXGA/720p/VGA/4CIF/ DCIF/2CIF/CIF/QCIF |
| Display | 2 HDMI/1 VGA/1CVBS | 2 HDMI/1 VGA/1CVBS | 2 HDMI/1 VGA/1CVBS | 2 HDMI/1 VGA/1CVBS |
| Storage Capacity | 4 SATA interfaces Up to 8 TB capacity for each HDD | 4 SATA interfaces Up to 8 TB capacity for each HDD | 4 SATA interfaces Up to 8 TB capacity for each HDD | 4 SATA interfaces Up to 8 TB capacity for each HDD |
| eSATA/Mini SAS | 1 eSATA interface(Optional) | 1 eSATA interface(Optional) | 1 eSATA interface(Optional) | 1 eSATA interface(Optional) |
| Video Output | HDMI1: 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI1/VGA simultaneous output; HDMI2: 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI2/VGA independent output; VGA: 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI1/VGA simultaneous output | HDMI1: 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI1/VGA simultaneous output; HDMI2: 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI2/VGA independent output; VGA: 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI1/VGA simultaneous output | HDMI1: 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI1/VGA simultaneous output; HDMI2: 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI2/VGA independent output; VGA: 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI1/VGA simultaneous output | HDMI1: 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI1/VGA simultaneous output; HDMI2: 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI2/VGA independent output; VGA: 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI1/VGA simultaneous output |
| Audio Output | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) |
| Alarm I/O | 16/4 | 16/4 | 16/4 | 16/4 |
| Network Interface | 1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces | 2 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces | 1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces | 2 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces |
| PoE Port | 16P | - | 16P | - |
| USB Port | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0 |
| Smart Function | Human/vehicle classification on all-channel motion detection results and on 4-channel VCA results by 2 MP network cameras; 1-channel face capture capacity; 1-channel face comparison capacity | Human/vehicle classification on all-channel motion detection results and on 4-channel VCA results by 2 MP network cameras; 1-channel face capture capacity; 1-channel face comparison capacity | Human/vehicle classification on all-channel motion detection results and on 4-channel VCA results by 2 MP network cameras; 1-channel face capture capacity; 1-channel face comparison capacity | Human/vehicle classification on all-channel motion detection results and on 4-channel VCA results by 2 MP network cameras; 1-channel face capture capacity; 1-channel face comparison capacity |
| Power Consumption (without HDD) | ≤ 15 W | ≤ 15 W | ≤ 15 W | ≤ 15 W |







| Model | DS-7616NXI-I2/16P/S | DS-7616NXI-I2/S | DS-7608NXI-I2/8P/S | DS-7608NXI-I2/S |
|---------------------------------|--|--|--|--|
| Image |  |  |  |  |
| Channel No. | 16-ch | 16-ch | 8-ch | 8-ch |
| Decoding Format | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 |
| Incoming/Outgoing Bandwidth | 160/256Mbps | 160/256Mbps | 80/256Mbps | 80/256Mbps |
| Decoding Capacity | 16-ch @1080p | 16-ch @1080p | 16-ch @1080p | 16-ch @1080p |
| Recording Resolution | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/ UXGA/720p/VGA/4CIF/ DCIF/2CIF/CIF/QCIF | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/ UXGA/720p/VGA/4CIF/ DCIF/2CIF/CIF/QCIF | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/ UXGA/720p/VGA/4CIF/ DCIF/2CIF/CIF/QCIF | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/ UXGA/720p/VGA/4CIF/ DCIF/2CIF/CIF/QCIF |
| Display | 1 HDMI/1 VGA/1CVBS | 1 HDMI/1 VGA/1CVBS | 1 HDMI/1 VGA/1CVBS | 1 HDMI/1 VGA/1CVBS |
| Storage Capacity | 2 SATA interfaces Up to 8 TB capacity for each HDD | 2 SATA interfaces Up to 8 TB capacity for each HDD | 2 SATA interfaces Up to 8 TB capacity for each HDD | 2 SATA interfaces Up to 8 TB capacity for each HDD |
| eSATA/Mini SAS | - | - | - | - |
| Video Output | VGA: 1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60Hz HDMI: 4K (3840×2160)/60Hz, 4K (3840×2160)/30Hz, 2K (2560×1440)/60Hz, 1920×1080/60Hz, 1600×1200/60Hz, 1280×1024/60Hz, | VGA: 1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60Hz HDMI: 4K (3840×2160)/60Hz, 4K (3840×2160)/30Hz, 2K (2560×1440)/60Hz, 1920×1080/60Hz, 1600×1200/60Hz, 1280×1024/60Hz, | VGA: 1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60Hz HDMI: 4K (3840×2160)/60Hz, 4K (3840×2160)/30Hz, 2K (2560×1440)/60Hz, 1920×1080/60Hz, 1600×1200/60Hz, 1280×1024/60Hz, | VGA: 1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60Hz HDMI: 4K (3840×2160)/60Hz, 4K (3840×2160)/30Hz, 2K (2560×1440)/60Hz, 1920×1080/60Hz, 1600×1200/60Hz, 1280×1024/60Hz, |
| Audio Output | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) |
| Alarm I/O | 4/1 | 4/1 | 4/1 | 4/1 |
| Network Interface | 1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces | 1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces | 1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces | 1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces |
| PoE Port | 16P | - | 8P | - |
| USB Port | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0 |
| Smart Function | Human/vehicle classification on all-channel motion detection results and on 4-channel VCA results by 2 MP network cameras; 1-channel face capture capacity; 1-channel face comparison capacity | Human/vehicle classification on all-channel motion detection results and on 4-channel VCA results by 2 MP network cameras; 1-channel face capture capacity; 1-channel face comparison capacity | Human/vehicle classification on all-channel motion detection results and on 4-channel VCA results by 2 MP network cameras; 1-channel face capture capacity; 1-channel face comparison capacity | Human/vehicle classification on all-channel motion detection results and on 4-channel VCA results by 2 MP network cameras; 1-channel face capture capacity; 1-channel face comparison capacity |
| Power Consumption (without HDD) | ≤ 15 W | ≤ 15 W | ≤ 15 W | ≤ 15 W |

| Model | DS-7732NI-I4/24P | DS-7732NI-I4/16P(B) | DS-7732NI-I4(B) | DS-7716NI-I4/16P(B) | DS-7716NI-I4(B) |
|---------------------------------|--|---|--|---|--|
| Image |  |  |  |  |  |
| Channel No. | 32-ch | 32-ch | 32-ch | 16-ch | 16-ch |
| Decoding Format | H.265+/H.265/H.264+/H.264/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 |
| Incoming/Outgoing Bandwidth | 320Mbps/ 256Mbps | 256Mbps/ 256Mbps | 256Mbps/ 256Mbps | 160Mbps/ 256Mbps | 160Mbps/ 256Mbps |
| Decoding Capacity | 2-ch @ 12 MP (20fps) / 4-ch @ 8 MP (30fps) / 8-ch @ 4MP (30fps) / 16-ch @ 1080p (30fps) | 2-ch @ 12 MP (20fps) / 4-ch @ 8 MP (25fps) / 8-ch @ 4MP (30fps) / 16-ch @ 1080p (30fps) | 2-ch @ 12 MP (20fps) / 4-ch @ 8 MP (25fps) / 8-ch @ 4MP (30fps) / 16-ch @ 1080p (30fps) | 2-ch @ 12 MP (20fps) / 4-ch @ 8 MP (25fps) / 8-ch @ 4MP (30fps) / 16-ch @ 1080p (30fps) | 2-ch @ 12 MP (20fps) / 4-ch @ 8 MP (25fps) / 8-ch @ 4MP (30fps) / 16-ch @ 1080p (30fps) |
| Recording Resolution | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/ DCIF/2CIF/CIF/QCIF | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF / DCIF/ 2CIF/CIF/QCIF | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF / DCIF/ 2CIF/CIF/QCIF | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF / DCIF/ 2CIF/CIF/QCIF | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF / DCIF/ 2CIF/CIF/QCIF |
| Display | 2HDMI/1 VGA/1CVBS | 2HDMI/1 VGA/1CVBS | 2HDMI/1 VGA/1CVBS | 2HDMI/1 VGA/1CVBS | 2HDMI/1 VGA/1CVBS |
| Storage Capacity | 4 SATA interfaces Up to 8TB capacity for each HDD | 4 SATA interfaces Up to 8TB capacity for each HDD | 4 SATA interfaces Up to 8TB capacity for each HDD | 4 SATA interfaces Up to 8TB capacity for each HDD | 4 SATA interfaces Up to 8TB capacity for each HDD |
| eSATA/Mini SAS | 1 eSATA interface | 1 eSATA interface | 1 eSATA interface | 1 eSATA interface | 1 eSATA interface |
| Video Output | HDMI1: 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024×768/60Hz VGA1: 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024×768/60Hz HDMI2:1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI1: 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024×768/60Hz VGA: 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024×768/60Hz HDMI2:1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI1: 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024×768/60Hz VGA: 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024×768/60Hz HDMI1/VGA Simultaneous Output HDMI2:1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI1: 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024×768/60Hz VGA: 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024×768/60Hz HDMI2:1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI1: 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024×768/60Hz VGA: 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024×768/60Hz HDMI1/VGA Simultaneous Output HDMI2:1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| Audio Output | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) |
| Alarm I/O | 16/4(optional:16/8) | 16/4(optional:16/8) | 16/4(optional:16/8) | 16/4(optional:16/8) | 16/4(optional:16/8) |
| Network Interface | 1 RJ-45 10/100/1000 Mbps self adaptive Ethernet interface | 1 RJ-45 10/100/1000 Mbps self adaptive Ethernet interface | 2 RJ-45 10/100/1000 Mbps self adaptive Ethernet interface | 1 RJ-45 10/100/1000 Mbps self adaptive Ethernet interface | 2 RJ-45 10/100/1000 Mbps self adaptive Ethernet interface |
| PoE Port | 24P | 16P | - | 16P | - |
| USB Port | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0 |
| Smart Function | Supports multiple VCA(Video Content Analytics) events for IP cameras | Supports multiple VCA(Video Content Analytics) events for IP cameras | Supports multiple VCA(Video Content Analytics) events for IP cameras | Supports multiple VCA(Video Content Analytics) events for IP cameras | Supports multiple VCA(Video Content Analytics) events for IP cameras |
| Power Consumption (without HDD) | ≤20 W (without enabling PoE) | ≤20 W (without enabling PoE) | ≤20 W (without enabling PoE) | ≤20 W (without enabling PoE) | ≤20 W |

| Model | DS-7732NI-K4/16P | DS-7732NI-K4 | DS-7716NI-K4/16P | DS-7716NI-K4 | DS-7716NI-Q4/16P | DS-7716NI-Q4 |
|---------------------------------|---|---|---|---|---|---|
| Image |  |  |  |  |  |  |
| Channel No. | 32-ch | 32-ch | 16-ch | 16-ch | 16-ch | 16-ch |
| Decoding Format | H.265/H.265+/H.264+/H.264/MPEG4 | H.265/H.265+/H.264+/H.264/MPEG4 | H.265/H.265+/H.264+/H.264/MPEG4 | H.265/H.265+/H.264+/H.264/MPEG4 | H.265/H.265+/H.264+/H.264/MPEG4 | H.265/H.265+/H.264+/H.264/MPEG4 |
| Incoming/Outgoing Bandwidth | 256Mbps/ 160Mbps | 256Mbps/ 160Mbps | 160Mbps/ 160Mbps | 160Mbps/ 160Mbps | 160Mbps/ 80Mbps | 160Mbps/ 80Mbps |
| Decoding Capacity | 2-ch @ 8 MP (25fps) / 4-ch @ 4MP (30fps) / 8-ch @ 1080p (30fps) | 2-ch @ 8 MP (25fps) / 4-ch @ 4MP (30fps) / 8-ch @ 1080p (30fps) | 2-ch @ 8 MP (25fps) / 4-ch @ 4MP (30fps) / 8-ch @ 1080p (30fps) | 2-ch @ 8 MP (25fps) / 4-ch @ 4MP (30fps) / 8-ch @ 1080p (30fps) | 1-ch @ 8 MP (30 fps) / 4-ch @ 1080p (30 fps) | 1-ch @ 8 MP (30 fps) / 4-ch @ 1080p (30 fps) |
| Recording Resolution | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF |
| Display | 1 HDMI/1 VGA | 1 HDMI/1 VGA | 1 HDMI/1 VGA | 1 HDMI/1 VGA | 1 HDMI/1 VGA | 1 HDMI/1 VGA |
| Storage Capacity | 4 SATA interfaces Up to 6TB capacity for each HDD | 4 SATA interfaces Up to 6TB capacity for each HDD | 4 SATA interfaces Up to 6TB capacity for each HDD | 4 SATA interfaces Up to 6TB capacity for each HDD | 4 SATA interface Up to 6TB capacity for each HDD | 4 SATA interface Up to 6TB capacity for each HDD |
| eSATA/Mini SAS | - | - | - | - | - | - |
| Video Output | HDMI:4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI:4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI:4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI:4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI:4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz; VGA:1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz; | HDMI:4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz; VGA:1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz; |
| Audio Output | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) |
| Alarm I/O | 16/4 | 16/4 | 16/4 | 16/4 | 16/4 (16/8 optional) | 16/4 (16/8 optional) |
| Network Interface | 1 RJ-45 10/100/1000 Mbps self adaptive Ethernet interfaces | 2 RJ-45 10/100/1000 Mbps self adaptive Ethernet interfaces | 1 RJ-45 10/100/1000 Mbps self adaptive Ethernet interfaces | 2 RJ-45 10/100/1000 Mbps self adaptive Ethernet interfaces | 1 RJ-45 10/100/1000 Mbps self adaptive Ethernet interfaces | 1 RJ-45 10/100/1000 Mbps self adaptive Ethernet interfaces |
| PoE Port | 16P | - | 16P | - | 16P | - |
| USB Port | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 2.0 | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 2.0 |
| Smart Function | Supports multiple VCA(Video Content Analytics) events for IP cameras | Supports multiple VCA(Video Content Analytics) events for IP cameras | Supports multiple VCA(Video Content Analytics) events for IP cameras | Supports multiple VCA(Video Content Analytics) events for IP cameras | Supports multiple VCA(Video Content Analytics) events for IP cameras | Supports multiple VCA(Video Content Analytics) events for IP cameras |
| Power Consumption (without HDD) | ≤ 20 W(without enabling PoE) | ≤20 W (without enabling PoE) | ≤20 W (without enabling PoE) | ≤20 W (without enabling PoE) | ≤ 15 W(without enabling PoE) | ≤ 15 W |

| Model | DS-7616NI-I2/16P | DS-7616NI-I2 | DS-7608NI-I2/8P | DS-7608NI-I2 | DS-7616NI-K2/16P |
|---------------------------------|--|---|--|---|--|
| Image |  |  |  |  |  |
| Channel No. | 16-ch | 16-ch | 8-ch | 8-ch | 16-ch |
| Decoding Format | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 |
| Incoming/Outgoing Bandwidth | 160 Mbps/256 Mbps | 160 Mbps/256 Mbps | 80 Mps/256 Mbps | 80 Mps/256 Mbps | 160Mbps/ 160Mbps |
| Decoding Capacity | 2-ch @ 12 MP (20fps) / 4-ch @ 8 MP (25fps) / 8-ch @ 4MP (30fps) / 16-ch @ 1080p (30fps) | 2-ch @ 12 MP (20fps) / 4-ch @ 8 MP (25fps) / 8-ch @ 4MP (30fps) / 16-ch @ 1080p (30fps) | 2-ch @ 12 MP (20fps) / 4-ch @ 8 MP (25fps) / 8-ch @ 4MP (30fps) / 16-ch @ 1080p (30fps) | 2-ch @ 12 MP (20fps) / 4-ch @ 8 MP (25fps) / 8-ch @ 4MP (30fps) / 16-ch @ 1080p (30fps) | 2-ch @ 8 MP (25fps) / 4-ch @ 4MP (30fps) / 8-ch @ 1080p (30fps) |
| Recording Resolution | 12 MP/8 MP/6 MP/5 MP/4 MP/3MP/1080p/UXGA/720p / VGA/4CIF /DCIF/2CIF/CIF/QCIF | 12 MP/8 MP/6 MP/5 MP/4 MP/3MP/1080p/UXGA/720p / VGA/4CIF /DCIF/2CIF/CIF/QCIF | 12 MP/8 MP/6 MP/5 MP/4 MP/3MP/1080p/UXGA/720p / VGA/4CIF /DCIF/2CIF/CIF/QCIF | 12 MP/8 MP/6 MP/5 MP/4 MP/3MP/1080p/UXGA/720p / VGA/4CIF /DCIF/2CIF/CIF/QCIF | "8MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF /2CIF/CIF/QCIF" |
| Display | 1 HDMI/1 VGA/(CVBS optional) | 1 HDMI/1 VGA/(CVBS optional) | 1 HDMI/1 VGA/(CVBS optional) | 1 HDMI/1 VGA/(CVBS optional) | 1 HDMI/1 VGA |
| Storage Capacity | 2 SATA interfaces Up to 8TB capacity for each HDD | 2 SATA interfaces Up to 8TB capacity for each HDD | 2 SATA interfaces Up to 8TB capacity for each HDD | 2 SATA interfaces Up to 8TB capacity for each HDD | 2 SATA interfaces Up to 8TB capacity for each HDD |
| eSATA/Mini SAS | - | - | - | - | - |
| Video Output | HDMI:4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI:4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI:4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI:4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI:4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz,1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| Audio Output | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) |
| Alarm I/O | 4/1 | 4/1 | 4/1 | 4/1 | 4/1 |
| Network Interface | 1 RJ-45 10/100/1000 Mbps self adaptive Ethernet interface | 1 RJ-45 10/100/1000 Mbps self adaptive Ethernet interface | 1 RJ-45 10/100/1000 Mbps self adaptive Ethernet interface | 1 RJ-45 10/100/1000 Mbps self adaptive Ethernet interface | 1, RJ-45 10/100/1000 Mbps self adaptive Ethernet interface |
| PoE Port | 16P | - | 8P | - | 16P |
| USB Port | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0 |
| Smart Function | Supports multiple VCA(Video Content Analytics) events for IP cameras | Supports multiple VCA(Video Content Analytics) events for IP cameras | Supports multiple VCA(Video Content Analytics) events for IP cameras | Supports multiple VCA(Video Content Analytics) events for IP cameras | Supports multiple VCA(Video Content Analytics) events for IP cameras |
| Power Consumption (without HDD) | ≤15 W (without enabling PoE) | ≤15 W (without enabling PoE) | ≤15 W (without enabling PoE) | ≤15 W (without enabling PoE) | ≤15 W (without enabling PoE) |

| Model | DS-7616NI-K2 | DS-7608NI-K2/8P | DS-7608NI-K2 | DS-7616NI-Q2/16P | DS-7616NI-Q2 | DS-7608NI-Q2/8P |
|---------------------------------|---|---|---|---|---|--|
| Image |  AUTO |  HOT |  HOT |  AUTO |  AUTO |  |
| Channel No. | 16-ch | 8-ch | 8-ch | 16-ch | 16-ch | 8-ch |
| Decoding Format | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 |
| Incoming/Outgoing Bandwidth | 160Mbps/ 160Mbps | 80Mbps/ 160Mbps | 80Mbps/ 160Mbps | 160Mbps/ 80Mbps | 160Mbps/ 80Mbps | 80Mbps/80Mbps |
| Decoding Capacity | 2-ch @ 8 MP (25fps) / 4-ch @ 4MP (30fps) / 8-ch @ 1080p (30fps) | 2-ch @ 8 MP (25fps) / 4-ch @ 4MP (30fps) / 8-ch @ 1080p (30fps) | 2-ch @ 8 MP (25fps) / 4-ch @ 4MP (30fps) / 8-ch @ 1080p (30fps) | 1-ch @ 8 MP (30 fps)/5-ch @ 1080p (30 fps) | 1-ch @ 8 MP (30 fps)/5-ch @ 1080p (30 fps) | 1-ch @ 8 MP (30 fps)/5-ch @ 1080p (30 fps) |
| Recording Resolution | 8MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF | 8MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF | 8MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF |
| Display | 1 HDMI/1 VGA | 1 HDMI/1 VGA | 1 HDMI/1 VGA | 1 HDMI/1 VGA | 1 HDMI/1 VGA | 1 HDMI/1 VGA |
| Storage Capacity | 2 SATA interfaces Up to 6TB capacity for each HDD | 2 SATA interfaces Up to 6TB capacity for each HDD | 2 SATA interfaces Up to 6TB capacity for each HDD | 2 SATA interfaces Up to 8TB capacity for each disk | 2 SATA interfaces Up to 8TB capacity for each disk | 2 SATA interfaces Up to 8TB capacity for each disk |
| eSATA/Mini SAS | - | - | - | - | - | - |
| Video Output | HDMI:4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI:4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI:4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI:4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI: 4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI:1-ch, 4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| Audio Output | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) |
| Alarm I/O | 4/1 | 4/1 | 4/1 | | | |
| Network Interface | 1, RJ-45 10/100/1000 Mbps self adaptive Ethernet interface | 1, RJ-45 10/100/1000 Mbps self adaptive Ethernet interface | 1, RJ-45 10/100/1000 Mbps self adaptive Ethernet interface | 1, RJ-45 10/100/1000 Mbps self adaptive Ethernet interface | 1, RJ-45 10/100/1000 Mbps self adaptive Ethernet interface | 1, RJ-45 10/100 Mbps self adaptive Ethernet interface |
| PoE Port | - | 8P | - | 16P | - | 8P |
| USB Port | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0 | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 2.0 | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 2.0 | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 2.0 |
| Smart Function | Supports multiple VCA(Video Content Analytics) events for IP cameras | Supports multiple VCA(Video Content Analytics) events for IP cameras | Supports multiple VCA(Video Content Analytics) events for IP cameras | Supports multiple VCA(Video Content Analytics) events for IP cameras | Supports multiple VCA(Video Content Analytics) events for IP cameras | Supports multiple VCA(Video Content Analytics) events for IP cameras |
| Power Consumption (without HDD) | ≤15 W | ≤15 W(without enabling PoE) | ≤15 W | ≤15 W(without enabling PoE) | ≤15 W | ≤15 W(without enabling PoE) |


| Model | DS-7608NI-Q2 | DS-7616NI-K1 | DS-7608NI-K1/8P | DS-7608NI-K1 | DS-7604NI-K1/4P | DS-7604NI-K1 |
|---------------------------------|--|--|---|--|--|--|
| Image |  AUTO |  AUTO |  HOT |  HOT AUTO |  HOT |  HOT AUTO |
| Channel No. | 8-ch | 16-ch | 8-ch | 8-ch | 4-ch | 4-ch |
| Decoding Format | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 | H.265/H.265+/H.264/H.264+/MPEG4 |
| Incoming/Outgoing Bandwidth | 80Mbps/80Mbps | 160Mbps/ 80Mbps | 80Mbps/ 80Mbps | 80Mbps/ 80Mbps | 40Mbps/ 80Mbps | 40Mbps/ 80Mbps |
| Decoding Capacity | 1-ch @ 8 MP (30 fps)/5-ch @ 1080p (30 fps) | 1-ch @ 8 MP (30 fps)/5-ch @ 1080p (30 fps) | 1-ch @ 8 MP (30 fps)/5-ch @ 1080p (30 fps) | 1-ch @ 8 MP (30 fps)/5-ch @ 1080p (30 fps) | 1-ch @ 8 MP (30 fps)/5-ch @ 1080p (30 fps) | 1-ch @ 8 MP (30 fps)/5-ch @ 1080p (30 fps) |
| Recording Resolution | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA / 720p/VGA/4CIF/DCIF/ 2CIF/ CIF/QCIF | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA / 720p/VGA/4CIF/DCIF/ 2CIF/ CIF/QCIF | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA / 720p/VGA/4CIF/DCIF/ 2CIF/ CIF/QCIF | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA / 720p/VGA/4CIF/DCIF/ 2CIF/ CIF/QCIF | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA / 720p/VGA/4CIF/DCIF/ 2CIF/ CIF/QCIF | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA / 720p/VGA/4CIF/DCIF/ 2CIF/ CIF/QCIF |
| Display | 1 HDMI/1 VGA | 1 HDMI/1 VGA | 1 HDMI/1 VGA | 1 HDMI/1 VGA | 1 HDMI/1 VGA | 1 HDMI/1 VGA |
| Storage Capacity | 2 SATA interfaces Up to 8TB capacity for each disk | 1 SATA interface Up to 8TB capacity for each HDD | 1 SATA interface Up to 8TB capacity for each HDD | 1 SATA interface Up to 8TB capacity for each HDD | 1 SATA interface Up to 8TB capacity for each HDD | 1 SATA interface Up to 8TB capacity for each HDD |
| eSATA/Mini SAS | - | - | - | - | - | - |
| Video Output | HDMI:4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI:4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI: 4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI:4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | HDMI:4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz;HDMI/VGA simultaneous output VGA:1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz;HDMI/VGA simultaneous output | HDMI: 4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz;HDMI/VGA simultaneous output VGA:1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz;HDMI/VGA simultaneous output |
| Audio Output | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) |
| Alarm I/O | | -- | -- | -- | -- | -- |
| Network Interface | 1, RJ-45 10/100 Mbps self adaptive Ethernet interface | 1, RJ-45 10/100/1000 Mbps self adaptive Ethernet interface | 1, RJ-45 10/100 Mbps self adaptive Ethernet interface | 1, RJ-45 10/100 Mbps self adaptive Ethernet interface | 1, RJ-45 10/100 Mbps self adaptive Ethernet interface | 1, RJ-45 10/100 Mbps self adaptive Ethernet interface |
| PoE Port | - | - | 8P | - | 4P | - |
| USB Port | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 2.0 | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 2.0 | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 2.0 | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 2.0 | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 2.0 | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 2.0 |
| Smart Function | Supports multiple VCA(Video Content Analytics) events for IP cameras | Intrusion, Line crossing, Unattended Baggage, Object removal, Region exiting/entrance, People gathering, Fast moving, Parking, Loitering | Intrusion, Line crossing, Unattended Baggage, Object removal, Region exiting/entrance, People gathering, Fast moving, Parking, Loitering | Intrusion, Line crossing, Unattended Baggage, Object removal, Region exiting/entrance, People gathering, Fast moving, Parking, Loitering | Intrusion, Line crossing, Unattended Baggage, Object removal, Region exiting/entrance, People gathering, Fast moving, Parking, Loitering | Intrusion, Line crossing, Unattended Baggage, Object removal, Region exiting/entrance, People gathering, Fast moving, Parking, Loitering |
| Power Consumption (without HDD) | ≤15 W | ≤ 10W | ≤ 10W(without enabling PoE) | ≤ 10W | ≤ 10W(without enabling PoE) | ≤ 10W |

Network Video Recorders

Value Series NVRs

Hikvision Value Series NVRs provide a highly cost-effective choice of video recording, live view, and playback. In particular, the Wi-Fi solutions of the Value Series NVRs make them easy to install and easy to manage.

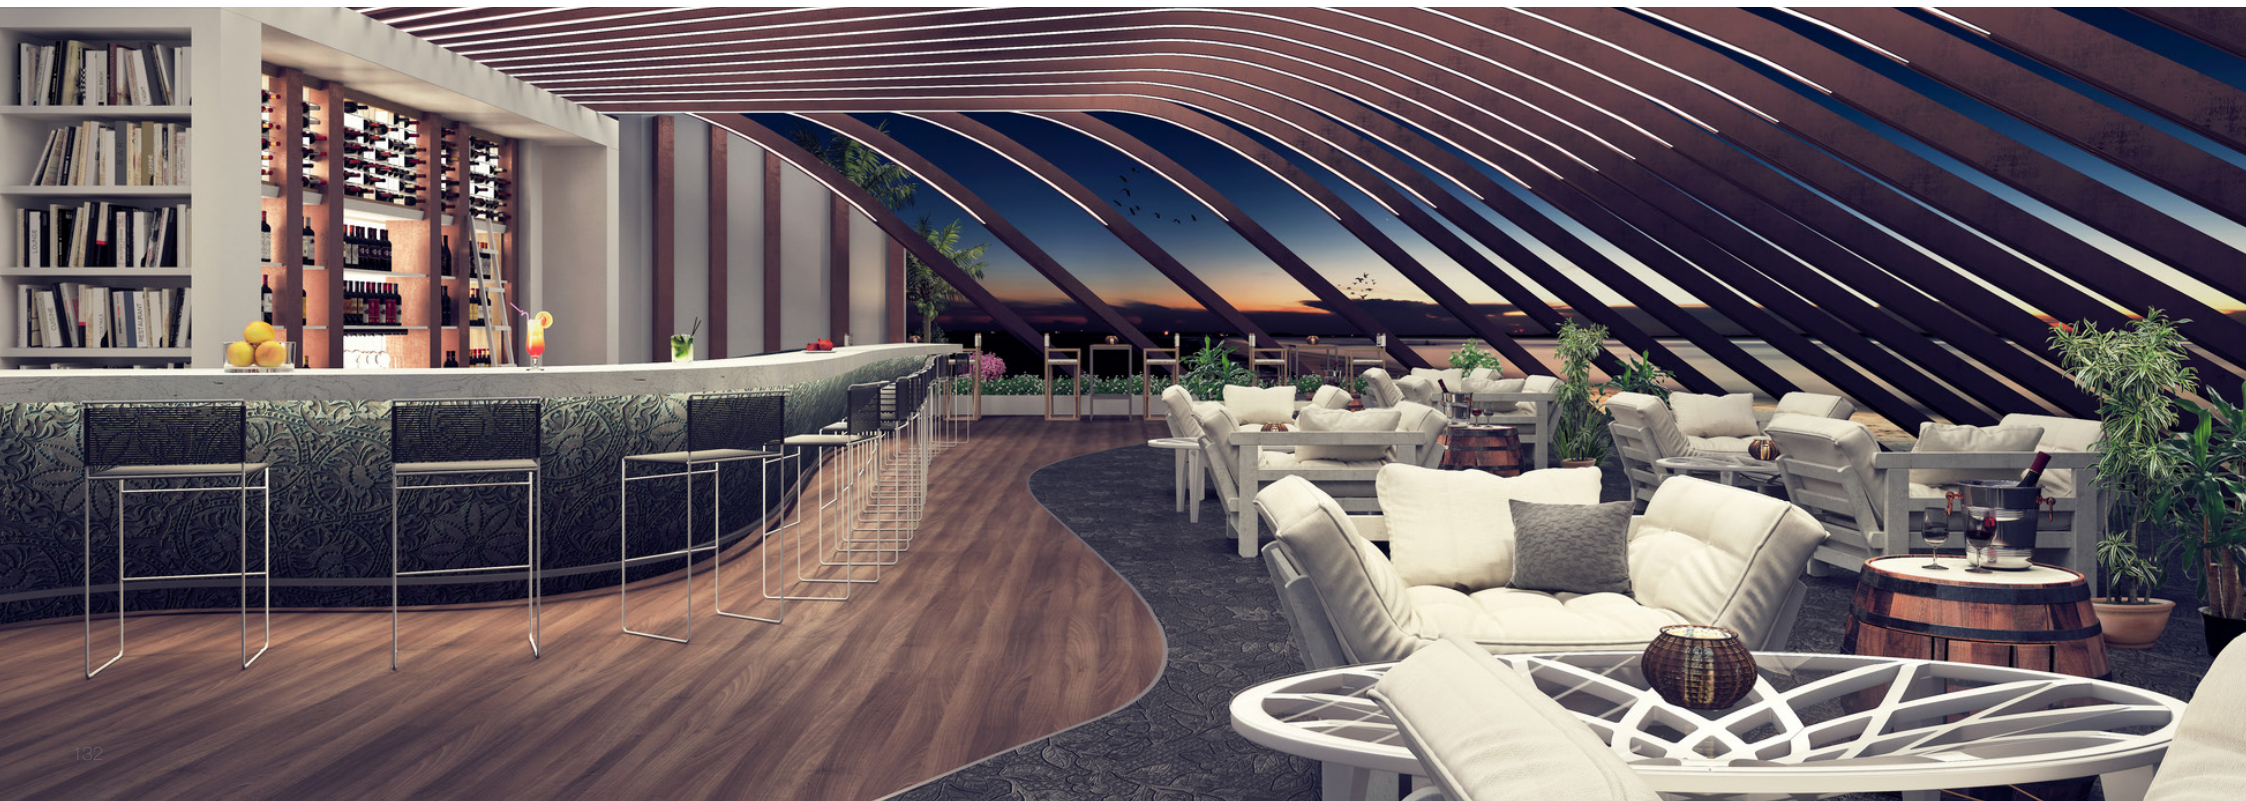

- > Cost-effective
- > H.265+ / H.265, H.264+ / H.264 self-adapting decoding
- > Up to 4-ch @ 1080p decoding for 71 Series
- > Plug and Play for PoE models
- > Wi-Fi Series NVRs offer two MIMO antennas designed for excellent Wi-Fi performance
- > 4-ch @ 4 MP decoding for new Wi-Fi Series NVRs



7 Series

| Model | DS-7108NI-Q1/8P/M | DS-7108NI-Q1/M | DS-7104NI-Q1/4P/M | DS-7104NI-Q1/M | DS-7108NI-Q1/8P | DS-7108NI-Q1 | DS-7104NI-Q1/4P | DS-7104NI-Q1 | |
|---------------------------------|---|---|---|---|---|---|---|---|---|
| Image |  |  Auto |  |  Auto |  |  Auto |  |  Auto | |
| Channel No. | 8-ch | 8-ch | 4-ch | 4-ch | 8-ch | 8-ch | 4-ch | 4-ch | |
| Decoding Format | H.265+/H.265/ H.264+/H.264 | H.265+/H.265/ H.264+/H.264 | H.265+/H.265/ H.264+/H.264 | H.265+/H.265/ H.264+/H.264 | H.265+/H.265/ H.264+/H.264 | H.265+/H.265/ H.264+/H.264 | H.265+/H.265/ H.264+/H.264 | H.265+/H.265/ H.264+/H.264 | |
| Incoming/Outgoing Bandwidth | 60 Mbps/ 60 Mbps | 60 Mbps/ 60 Mbps | 40 Mbps/ 60 Mbps | 40 Mbps/ 60 Mbps | 60 Mbps/ 60 Mbps | 60 Mbps/ 60 Mbps | 40 Mbps/ 60 Mbps | 40 Mbps/ 60 Mbps | |
| Decoding Capacity | 4-ch @ 1080p (25 fps), 1-ch @ 6 MP (25 fps) | 4-ch @ 1080p (25 fps), 1-ch @ 6 MP (25 fps) | 4-ch @ 1080p (25 fps), 1-ch @ 6 MP (25 fps) | 4-ch @ 1080p (25 fps), 1-ch @ 6 MP (25 fps) | 4-ch @ 1080p (25 fps), 1-ch @ 6 MP (25 fps) | 4-ch @ 1080p (25 fps), 1-ch @ 6 MP (25 fps) | 4-ch @ 1080p (25 fps), 1-ch @ 6 MP (25 fps) | 4-ch @ 1080p (25 fps), 1-ch @ 6 MP (25 fps) | |
| Recording Resolution | 6 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF | 6 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF | 6 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF | 6 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF | 6 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF | 6 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF | 6 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF | 6 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF | |
| Display | 1 HDMI/1 VGA | 1 HDMI/1 VGA | 1 HDMI/1 VGA | 1 HDMI/1 VGA | 1 HDMI/1 VGA | 1 HDMI/1 VGA | 1 HDMI/1 VGA | 1 HDMI/1 VGA | |
| Storage Capacity | 1 SATA interface Up to 6TB capacity for each HDD | 1 SATA interface Up to 6TB capacity for each HDD | 1 SATA interface Up to 6TB capacity for each HDD | 1 SATA interface Up to 6TB capacity for each HDD | 1 SATA interface Up to 6TB capacity for each HDD | 1 SATA interface Up to 6TB capacity for each HDD | 1 SATA interface Up to 6TB capacity for each HDD | 1 SATA interface Up to 6TB capacity for each HDD | |
| eSATA/Mini SAS | - | - | - | - | - | - | - | - | |
| Video Output | HDMI:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI/VGA simultaneous output | HDMI:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI/VGA simultaneous output | HDMI:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI/VGA simultaneous output | HDMI:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI/VGA simultaneous output | HDMI:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI/VGA simultaneous output | HDMI:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI/VGA simultaneous output | HDMI:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI/VGA simultaneous output | HDMI:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI/VGA simultaneous output | HDMI:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI/VGA simultaneous output |
| Audio Output | - | - | - | - | - | - | - | - | |
| Alarm I/O | - | - | - | - | - | - | - | - | |
| Network Interface | 1, RJ-45 10/100Mbps self-adaptive Ethernet interface | 1, RJ-45 10/100Mbps self-adaptive Ethernet interface | 1, RJ-45 10/100Mbps self-adaptive Ethernet interface | 1, RJ-45 10/100Mbps self-adaptive Ethernet interface | 1, RJ-45 10/100Mbps self-adaptive Ethernet interface | 1, RJ-45 10/100Mbps self-adaptive Ethernet interface | 1, RJ-45 10/100Mbps self-adaptive Ethernet interface | 1, RJ-45 10/100Mbps self-adaptive Ethernet interface | |
| PoE Port | 8P | - | 4P | - | 8P | - | 4P | - | |
| USB Port | 2 × USB 2.0 | 2 × USB 2.0 | 2 × USB 2.0 | 2 × USB 2.0 | 2 × USB 2.0 | 2 × USB 2.0 | 2 × USB 2.0 | 2 × USB 2.0 | |
| Smart Function | line crossing and intrusion detection | line crossing and intrusion detection | line crossing and intrusion detection | line crossing and intrusion detection | line crossing and intrusion detection | line crossing and intrusion detection | line crossing and intrusion detection | line crossing and intrusion detection | |
| Power Consumption (without HDD) | ≤ 10W(without enabling PoE) | ≤ 10W | ≤ 10W(without enabling PoE) | ≤ 10W | ≤ 10W(without enabling PoE) | ≤ 10W | ≤ 10W(without enabling PoE) | ≤ 10W | |

Turbo HD Camera
Turbo HD PTZ Camera
DVRs
Encoder
Network Camera
PTZ Dome Camera
Panoramic Camera
NVR
KIT
Thermal Monitor
Switch
Cable
Controller & Transmission
HiK-PoConnect
Accessories
DORI Distance

| Model | DS-7104NI-K1/W/M(C) | DS-7104NI-K1/W/M(C) |
|---------------------------------|---|---|
| Image |  |  |
| Channel No. | 8-ch | 4-ch |
| Decoding Format | H.264, H.265, H.264+, and H.265+ | H.264, H.265, H.264+, and H.265+ |
| Incoming/Outgoing Bandwidth | 50/40 Mbps | 50/40 Mbps |
| Decoding Capacity | 4-ch@1080p (25 fps), 4-ch@4 MP (12 fps) | 4-ch@1080p (25 fps), 4-ch@4 MP (12 fps) |
| Recording Resolution | 4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF | 4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF |
| Display | 1 HDMI/1 VGA | 1 HDMI/1 VGA |
| Video Output | HDMI:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI/VGA simultaneous output | HDMI:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA:1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI/VGA simultaneous output |
| Storage Capacity | Up to 6 TB capacity for each disk | Up to 6 TB capacity for each disk |
| Frequency band | 2.4 GHz | 2.4 GHz |
| Antenna structure | 2 × 2MIMO | 2 × 2MIMO |
| Transmission speed | 144 Mbps | 144 Mbps |
| Transmission standard | IEEE 802.11b/g/n | IEEE 802.11b/g/n |
| Audio Output | 1-ch, RCA (linear, 1 KΩ) | 1-ch, RCA (linear, 1 KΩ) |
| Alarm I/O | - | - |
| Network Interface | 1, RJ45 10/100M Ethernet interface | 1, RJ45 10/100M Ethernet interface |
| PoE Port | | |
| USB Port | Rear panel: 2 × USB 2.0 | Rear panel: 2 × USB 2.0 |
| Smart Function | Supports line crossing and intrusion VCA (Video Content Analytics) events for IP cameras | Supports line crossing and intrusion VCA (Video Content Analytics) events for IP cameras |
| Power Consumption (without HDD) | ≤ 10 W | ≤ 10 W |

Kit

137 Wi-Fi Kit

138 PoE Kit



Kit





Wi-Fi Kit:


- A kit includes four Wi-Fi cameras, one Wi-Fi NVR, and all accessories to minimize time and costs
- Auto-connect function for quick connection
- Stable Wi-Fi signal provides up to 120 meters of Wi-Fi coverage (in open places)

PoE Kit:

- A kit includes four PoE cameras, one PoE NVR, and all accessories to save time and cost
- PoE function to save wiring installation time
- Plug and play function for quick configuration



| Model | NK42W0H-1T(WD) | NK42W1H-1T(WD) | NK44W0H-1T(WD) | NK44W1H-1T(WD) |
|-----------------------------|---|--|---|--|
| Image |  |  |  |  |
| Camera Case Type | Bullet | Dome | Bullet | Dome |
| Min. Illumination | Color: 0.02 Lux @ (F2.0, AGC ON) | Color: 0.02 Lux @ (F2.0, AGC ON) | Color:0.028 Lux @(F2.0; AGC ON) | Color:0.028 Lux @(F2.0; AGC ON) |
| Protection Level | IP66 | IP66 | IP66 | IP66 |
| Material | Front cover: metal, back cover: plastic | Plastic | Front cover: plastic, camera body: metal | Plastic |
| Focal Length | 2.8 mm | 2.8 mm | 2.8 mm | 2.8 mm |
| IR Range | Up to 30 m | Up to 30 m | Up to 30 m | Up to 30 m |
| Video Compression | Main stream: H.265+/H.264+/H.265/H.264 Sub-stream: H.265/H.264 | Main stream: H.265+/H.264+/H.265/H.264 Sub-stream: H.265/H.264 | Main stream: H.265+/H.264+/H.265/H.264 Sub-stream: H.265/H.264 | Main stream: H.265+/H.264+/H.265/H.264 Sub-stream: H.265/H.264 |
| Max. Resolution | 1920 × 1080 | 1920 × 1080 | 2560 × 1440 | 2560 × 1440 |
| Audio I/O | 1 built-in mic | 1 built-in mic | 1 Built-in mic, mono sound | 1 Built-in mic, mono sound |
| Power Supply | 12 VDC ± 25%, Ø 5.5 mm coaxial power plug, reverse polarity protection | 12 VDC ± 25%, Ø 5.5 mm coaxial power plug, reverse polarity protection | 12 VDC ± 25%, 0.5 A, Ø 5.5 mm coaxial plug power | 12 VDC ± 25%, 0.5 A, Ø 5.5 mm coaxial plug power |
| IP Video Input | 4-ch | 4-ch | 4-ch | 4-ch |
| Incoming/Outgoing Bandwidth | 50 Mbps/40 Mbps | 50 Mbps/40 Mbps | 50 Mbps/40 Mbps | 50 Mbps/40 Mbps |
| HDMI/VGA Output | 1-ch, resolution: 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, resolution: 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, resolution: 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1-ch, resolution: 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| Video Resolution | 4 MP/3 MP/1080p/1.3 MP/720p | 4 MP/3 MP/1080p/1.3 MP/720p | 4 MP/3 MP/1080p/1.3 MP/720p | 4 MP/3 MP/1080p/1.3 MP/720p |
| Capability | 4-ch@4 MP (12 fps)/4-ch@1080p (25 fps) | 4-ch@1080p/1-ch@4 MP | 4-ch@4 MP (12 fps)/4-ch@1080p (25 fps) | 4-ch@1080p/1-ch@4 MP |
| PoE Interfaces Power | - | - | - | - |
| SATA | 1 | 1 | 1 | 1 |
| Power Supply | 12 VDC | 12 VDC | 12 VDC | 12 VDC |
| Dimension (W × D × H) | 265 × 225 × 48 mm (10.4" × 8.9" × 1.9") | 260 mm × 246 mm × 48 mm (10.2" × 9.7" × 1.9") | 265 × 225 × 48 mm (10.4" × 8.9" × 1.9") | 260 mm × 246 mm × 48 mm (10.2" × 9.7" × 1.9") |
| Accessories | Power cable: 4 × IPC power cables, 1 × NVR power cable Ethernet cable: RJ45, Cat5e UTP, 1 m. Connects NVR and Switch HDMI cable: 1 × HDMI cable, 2 m, black | Power: 4 × IPC power cables, 1 × NVR power cable Network cable: RJ45, Cat5e UTP, 1 m. Connects NVR and Switch HDMI cable: 1 × HDMI cable, 2 m, black | Power cable: 4 × IPC power cables, 1 × NVR power cable Ethernet cable: RJ45, Cat5e UTP, 1 m. Connects NVR and Switch HDMI cable: 1 × HDMI cable, 2 m, black | Power: 5 power cables Network cable: 4 × 18.3 m (60 ft) video and power cable HDMI cable: 1 HDMI cable |
| Hard Drive | -1T:Pre-installed 1 TB HDD | -1T:Pre-installed 1 TB HDD | -1T:Pre-installed 1 TB HDD | -1T:Pre-installed 1 TB HDD |

| Model | NK42E2H-1T(WD) | NK42E2H | NK42E3H-1T(WD) | NK42E3H |
|-----------------------------|--|--|--|--|
| Image |  |  |  |  |
| Camera Case Type | Turret | Turret | Bullet & Dome | Bullet & Dome |
| Min. Illumination | Color:0.028 Lux @(F2.0; AGC ON) | Color:0.028 Lux @(F2.0; AGC ON) | Color:0.028 Lux @(F2.0; AGC ON) | Color:0.028 Lux @(F2.0; AGC ON) |
| Protection Level | IP67 | IP67 | Bullet: IP67 Dome: IP67, IK10 | Bullet: IP67 Dome: IP67, IK10 |
| Material | Camera body: metal, bottom base : plastic | Camera body: metal, bottom base : plastic | Bullet: Front cover: metal, back cover & bracket: plastic Dome: Front cover: plastic, back cover & bracket: metal | Bullet: Front cover: metal, back cover & bracket: plastic Dome: Front cover: plastic, back cover & bracket: metal |
| Focal Length | 2.8 mm | 2.8 mm | 2.8 mm | 2.8 mm |
| IR Range | Up to 30 m | Up to 30 m | Up to 30 m | Up to 30 m |
| Video Compression | Main stream: H.265+/H.264+/H.265/H.264 Sub-stream: H.265/H.264 | Main stream: H.265+/H.264+/H.265/H.264 Sub-stream: H.265/H.264 | Main stream: H.265+/H.264+/H.265/H.264 Sub-stream: H.265/H.264 | Main stream: H.265+/H.264+/H.265/H.264 Sub-stream: H.265/H.264 |
| Max. Resolution | 1920 × 1080 | 1920 × 1080 | 1920 × 1080 | 1920 × 1080 |
| On-board Storage | No | No | No | No |
| Audio I/O | No | No | No | No |
| Power Supply | 12 VDC ± 25%, Ø 5.5 mm coaxial plug power, or PoE (802.3af, class 3) | 12 VDC ± 25%, Ø 5.5 mm coaxial plug power, or PoE (802.3af, class 3) | 12 VDC ± 25%, Ø 5.5 mm coaxial plug power, or PoE (802.3af, class 3) | 12 VDC ± 25%, Ø 5.5 mm coaxial plug power, or PoE (802.3af, class 3) |
| IP Video Input | 4-ch | 4-ch | 4-ch | 4-ch |
| Incoming/Outgoing Bandwidth | 40 Mbps/60 Mbps | 40 Mbps/60 Mbps | 40 Mbps/60 Mbps | 40 Mbps/60 Mbps |
| HDMI/VGA Output | 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| Video Resolution | 6 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/ CIF/QCIF | 6 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/ CIF/QCIF | 6 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/ CIF/QCIF | 6 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/ CIF/QCIF |
| Capability | 4ch@1080p / 1-ch@6MP | 4ch@1080p / 1-ch@6MP | 4ch@1080p / 1-ch@6MP | 4ch@1080p / 1-ch@6MP |
| PoE Interfaces Power | ≤ 36 W | ≤ 36 W | ≤ 36 W | ≤ 36 W |
| SATA | 1 SATA interface | 1 SATA interface | 1 SATA interface | 1 SATA interface |
| Power Supply | 48 VDC | 48 VDC | 48 VDC | 48 VDC |
| Dimension (W × D × H) | 265 × 225 × 48 mm (10.4" × 8.9" × 1.9") | 265 × 225 × 48 mm (10.4" × 8.9" × 1.9") | 265 × 225 × 48 mm (10.4" × 8.9" × 1.9") | 265 × 225 × 48 mm (10.4" × 8.9" × 1.9") |
| Accessories | Power: 5 power cables Network cable: 4 × 18.3 m (60 ft) video and power cable HDMI cable: 1 HDMI cable | Power: 5 power cables Network cable: 4 × 18.3 m (60 ft) video and power cable HDMI cable: 1 HDMI cable | Power: 5 power cables Network cable: 4 × 18.3 m (60 ft) video and power cable HDMI cable: 1 HDMI cable | Power: 5 power cables Network cable: 4 × 18.3 m (60 ft) video and power cable HDMI cable: 1 HDMI cable |
| Hard Drive | -1T:Pre-installed 1 TB HDD | - | -1T:Pre-installed 1 TB HDD | - |

Thermal Cameras

140 HeatPro Series



Thermal Cameras

HeatPro Series

Professional Protection Made Simple

Hikvision HeatPro Series Cameras feature deep-learning thermal video analytics for all-weather perimeter protection, object temperature measurement and fire detection with real-time alarms. They are affordable and easy to configure, making the cameras ideal for SMB applications in residential, retail, parking, museums, data centers, and other verticals.

- > All-weather deterrence and alerts
- > Simple, three-step deployment for perimeter protection
- > Thermal video analytics with deep-learning human & vehicle classification, reducing maintenance overhead
- > Temperature exception alarms for fire prevention
- > Visual and auditory alarms (offered by / PA models)



HeatPro





Hikvision HeatPro Series Thermal Cameras



Professional Protection Made Simple



Single Lens

| Model | DS-2TD1117-2PA/3PA/6PA | DS-2TD2117-3PA/6PA/10PA |
|-----------------------------|--|--|
| Image |  Audible Alarm and Strobe Light |  Audible Alarm and Strobe Light |
| Sensor (Thermal) | Vanadium Oxide Uncooled Focal Plane Arrays | Vanadium Oxide Uncooled Focal Plane Arrays |
| NETD | < 40 mk (@25 °C, F# = 1.1) | < 40 mk (@25 °C, F# = 1.1) |
| Pixel Pitch (Thermal) | 17 μm | 17 μm |
| Resolution (Thermal) | 160 × 120 | 160 × 120 |
| Sensor (Optical) | - | - |
| Max. Resolution (Optical) | - | - |
| Min. Illumination (Optical) | - | - |
| Lens | 2, 3 or 6 mm | 3, 6 or 10 mm |
| Field of View (Thermal) | 2 mm: 90° × 66.4° 3 mm: 50° × 37.2° 6 mm: 25.0° × 18.7° | 3 mm: 50° × 37.2° 6 mm: 25.0° × 18.7° 10 mm: 15.96° × 12° |
| Video Compression | H.265/H.264/MJPEG | H.265/H.264/MJPEG |
| Frame Rate | 25 fps | 25 fps |
| Ingress Protection | IP66 | IP66 |
| Pan/Tilt | - | - |
| Audio Input | 1-ch 3.5 mm Mic in/Line in interface. Line input: 2 - 2.4 V (p-p), output impedance: 1 KΩ ± 10% | 1-ch 3.5 mm Mic in/Line in interface. Line input: 2 to 2.4 V (p-p), output impedance: 1 KΩ ± 10% |
| Audio Output | Linear level; impedance: 600 Ω | Linear level, impedance: 600 Ω |
| Alarm Input | 1-ch inputs (0-5 VDC) | 2-ch inputs (0-5 VDC) |
| Alarm Output | 1-ch relay outputs, alarm response actions configurable | 2-ch relay outputs, alarm response actions configurable |
| Power | 12 VDC ± 20% PoE (802.3af) | 12 VDC ± 20% PoE (802.3af) |
| Environmental Requirement | From -40 °C to 65 °C [-40 °F to 149 °F], Humidity: 95% or less | From -40 °C to 65 °C [-40 °F to 149 °F], Humidity: 95% or less |
| VCA | Line Crossing, Intrusion, Region Entrance, Region Exiting | Line Crossing, Intrusion, Region Entrance, Region Exiting |
| Fire Detection | Dynamic fire detection, up to 10 fire points detectable. | Dynamic fire detection, up to 10 fire points detectable. |
| Temperature Measuring Range | -20 °C to +150 °C [-4 °F to +302 °F] | -20 °C to +150 °C [-4 °F to +302 °F] |
| Temperature Accuracy | ± 8 °C (± 14.4 °F) | ± 8 °C (± 14.4 °F) |

Dual lens

| Model | DS-2TD1217-2PA/3PA/6PA | DS-2TD2617-3PA/6PA/10PA |
|-----------------------------|--|--|
| Image |  Audible Alarm and Strobe Light |  Audible Alarm and Strobe Light |
| Sensor (Thermal) | Vanadium Oxide Uncooled Focal Plane Arrays | Vanadium Oxide Uncooled Focal Plane Arrays |
| NETD | < 40 mK (@25 °C, F# = 1.1) | < 40 mK (@25 °C, F# = 1.1) |
| Pixel Pitch (Thermal) | 17 μm | 17 μm |
| Resolution (Thermal) | 160 × 120 (the resolution of output image is 320 × 240) | 160 × 120 (the resolution of output image is 320 × 240) |
| Sensor (Optical) | 1/2.7" Progressive Scan CMOS | 1/2.7" Progressive Scan CMOS |
| Max. Resolution (Optical) | 2688 × 1520 | 2688 × 1520 |
| Min. Illumination (Optical) | 2PA Color: 0.0176 Lux @ (F2.25, AGC ON), B/W: 0.0035 Lux @ (F2.25, AGC ON) 3PA/6PA Color: 0.0089 Lux @ (F1.6, AGC ON), B/W: 0.0018 Lux @ (F1.6, AGC ON) | Color: 0.0089 Lux @ (F1.6, AGC ON), B/W: 0.0018 Lux @ (F1.6, AGC ON) |
| Lens | Thermal: 2, 3 or 6 mm Optical: 2, 4 or 6 mm | Thermal: 3, 6 or 10 mm Optical: 4, 6 or 8 mm |
| Field of View (Thermal) | 2 mm: 90° × 66.4° 3 mm: 50° × 37.2° 6 mm: 25.0° × 18.7° | 3 mm: 50° × 37.2° 6 mm: 25.0° × 18.7° 10 mm: 15.96° × 12° |
| Video Compression | H.265/H.264/MJPEG | H.265/H.264/MJPEG |
| Frame Rate | 25 fps | 25 fps |
| Ingress Protection | IP66 | IP66 |
| Pan/Tilt | - | - |
| Audio Input | 1-ch 3.5 mm Mic in/Line in interface. Line input: 2 - 2.4 V (p-p), output impedance: 1 KΩ ± 10% | 1-ch 3.5 mm Mic in/Line in interface. Line input: 2 to 2.4 V (p-p), output impedance: 1 KΩ ± 10% |
| Audio Output | Linear level; impedance: 600 Ω | Linear level, impedance: 600 Ω |
| Alarm Input | 1-ch inputs (0-5 VDC) | 2-ch inputs (0-5 VDC) |
| Alarm Output | 1-ch relay outputs, alarm response actions configurable | 2-ch relay outputs, alarm response actions configurable |
| Power | 12 VDC ± 20% PoE (802.3af) | 12 VDC ± 20% PoE (802.3af) |
| Environmental Requirement | From -40 °C to 65 °C [-40 °F to 149 °F]; Humidity: 95% or less | From -40 °C to 65 °C [-40 °F to 149 °F]; Humidity: 95% or less |
| VCA | Line Crossing, Intrusion, Region Entrance, Region Exiting | Line Crossing, Intrusion, Region Entrance, Region Exiting |
| Fire Detection | Dynamic fire detection, up to 10 fire points detectable. | Dynamic fire detection, up to 10 fire points detectable. |
| Temperature Measuring Range | -20 °C to +150 °C [-4 °F to +302 °F] | -20 °C to +150 °C [-4 °F to +302 °F] |
| Temperature Accuracy | ± 8 °C (± 14.4 °F) | ± 8 °C (± 14.4 °F) |

Monitors

143 Pro Series

146 Value Series



Monitors






Pro Series

Visual and Audio Clarity


Pro Series monitors deliver 24/7 operation with FHD or UHD images.

- > Full HD 1080p/UHD 4K resolution
- > Wide viewing angle – 178°(H) / 178°(V)
- > 3D comb filter, 3D De-interlace , 3D noise reduction
- > Longer life span for critical performance and minimum TCO
- > Perfect integration and compatibility with DVRs and NVRs
- > Supports multiple inputs: HDMI, DVI, VGA, BNC, USB, audio in, RS232, RJ45, IR
- > Standard VESA bracket
- > On Duty 24/7 for Mission Critical Applications






| Model | DS-D5027UC | DS-D5043UC | DS-D5050UC | DS-D5055UC | DS-D5065UC | |
|-----------|---|--|---|--|---|---|
| Image |  |  |  |  |  | |
| Display | Max Resolution | 3840*2160 | 3840*2160 | 3840*2160 | 3840*2160 | |
| | Backlight | LED-Backlit TFT LCD | D-LED Backlight | LED Backlight | D-LED Backlight | |
| | Active Display Area | 27" | 42.5" | 49.5" | 54.6" | 64.5" |
| | Brightness | 350cd/m ² | 400 cd/m ² | 300 cd/m ² | 400 cd/m ² | 400 cd/m ² |
| | Aspect Ratio | 16:9 | 16:9 | 16:9 | 16:9 | 16:9 |
| | Contrast Ratio | 1000:1 | 1200:1 | 4000: 1 | 1200:1 | 1200:1 |
| | Response Time | 14ms | 8ms | 8ms | 8ms | 8ms |
| | Color | 1.07billion | 1.07billion | 1.07billion | 1.07billion | 1.07billion |
| | Viewing Angle | Horizontal 178°, Vertical 178° | Horizontal 178°, Vertical 178° | Horizontal 178°, vertical 178° | Horizontal 178°, Vertical 178° | Horizontal 178°, Vertical 178° |
| Interface | Input | HDMI input 1 DP input 1 | RS232 1 HDMI 2.0 2 VGA 1 LAN 1 Audio in 1 USB3.0*1 /USB2.0*1 2 | LAN 1 VGA input 1 HDMI input 1 AV input 1 (CVBS IN, L Audio input, R Audio input) USB 2.0 1 USB 3.0 1 | HDMI 2.0 2 VGA 1 LAN 1 Audio in 1 USB3.0*1 /USB2.0*1 2 RS232 1 | RS232 1 HDMI 2.0*2 2 VGA 1 LAN 1 Audio in 1 USB3.0*1 /USB2.0*1 2 |
| | Output | Audio input 1 | Audio out 1 | SPDIF output 1 | Audio out 1 | Audio out 1 |
| | Speaker | 2 * 2W | 8W*2 | 2*8W | 8W*2 | 8W*2 |
| General | Input Voltages | 100-240 VAC,50/60 Hz | AC 100-240V, 50/60 Hz | 100 to 240 VAC, 50/60Hz | AC 100-240V, 50/60 Hz | AC 100-240V, 50/60 Hz |
| | Power Consumption | ≤56W | ≤120W | ≤ 117W | ≤180W | ≤270W |
| | Dimensions | 614.19mm * 400.4mm * 249.6mm | 968.2mm*559.4mm*60.9 mm | 1123.6 × 649.3 × 77 mm | 1239.2mm*711.6mm*61.7 mm | 1458.7mm*834.7mm*.81.6mm |
| | Weight | Gross Weight 6.55 Kg Net Weight 5.07 kg | Gross Weight 11.7kg Net Weight 8.6kg | Gross Weight 12.35 kg Net Weight 12.00 kg | Gross Weight 20.7kg Net Weight 16Kg | Gross Weight 30.6kg Net Weight 24.5kg |
| | VESA Mounting | 100mm * 100mm | 200mm*200mm/400mm*400mm | 400mm*200mm | 400mm*200mm/400mm*400mm | 400mm*400mm |
| | Operating Temperature | 0-40 ° (0 to 104 ° F) | 0°-40°(0 to 104 ° F) | 0 to 40 ° C (0 to 104 ° F) | 0°- 40° | 0-40°(0 to 104 ° F) |
| | Working Time | 7*24h | 7*24h | 7*24h | 7*24h | 7*24h |
| | Wall mounted Bracket (Optional) | DS-DM1940W | DS-DM4255W | DS-DM4255W | DS-DM4255W | DS-DM6586W |
| | Stand Bracket (Optional) | Included by default | DS-DM4304B | DS-DM5001B | DS-DM5504B | DS-DM6501B |

FL Series

| Model | | DS-D5043FL-B |
|-----------|---------------------------------|---|
| Image | |  |
| Display | Max Resolution | 1920 x 1080 |
| | Backlight | LED-Backlit |
| | Active Display Area | 43" |
| | Brightness | 500 nit |
| | Aspect Ratio | 16:9 |
| | Contrast Ratio | 1200:1 |
| | Response Time | 8 ms |
| | Color | 72 % NTSC |
| | Viewing Angle | Horizontal 178°, Vertical 178° |
| Interface | Input | VGA x 1, DVI x 1, HDMI x 1, BNC IN x 1, AUDIO IN x 1 |
| | Output | BNC OUT x 1, Built-in audio x 2 |
| | Speaker | - |
| General | Input Voltages | 100 to 240 VAC, 50/60 Hz |
| | Power Consumption | 118 W |
| | Dimensions | 998.78 x 590.52 x 78.24 mm (39.32" x 23.24" x 3.08") |
| | Weight | 23 Kg(Gross weight), 21 Kg(Net weigh) |
| | VESA Mounting | 400 (H) x 300 (V) mm |
| | Operating Temperature | 0 °C to 40 °C (32 °F to 104 °F) |
| | Working Time | 7*24h |
| | Wall mounted Bracket (Optional) | DS-DM4255W |
| | Stand Bracket | DS-DM4303B |

FC Series

| Model | | DS-D5022FC | DS-D5024FC | DS-D5032FC-A |
|-----------|---------------------------------|---|---|---|
| Image | |  |  |  |
| Display | Max Resolution | 1920×1080 | 1920×1080 | 1920×1080 |
| | Backlight | LED-Backlit TFT LCD | LED-Backlit TFT LCD | LED-Backlit TFT LCD |
| | Active Display Area | 21.5" | 23.6" | 31.5" |
| | Brightness | 250cd/m ² | 250cd/m ² | 300cd/m ² |
| | Aspect Ratio | 16:9 | 16:9 | 16:9 |
| | Contrast Ratio | 1000:1 | 1000:1 | 1000:1 |
| | Response Time | 5ms | 5ms | 8ms |
| | Color | 16.7M | 16.7M | 16.7M |
| | Viewing Angle | Horizontal 170°, Vertical 160° | Horizontal 170°, Vertical 160° | Horizontal 178°, Vertical 178° |
| Interface | Input | HDMIx1, VGA×1, BNCx1, USB×1, Audio(3.5mm mini-jack)×1, Stereo×1 | HDMIx1, VGA×1, BNCx1, AUDIO (3.5mm mini-jack)×1, RCA×1 | DVix1, HDMIx1, VGA×1, BNCx1, AUDIO (3.5mm mini-jack)×1 |
| | Output | BNC×1, Audio(3.5mm mini-jack)×1, Stereo out×1 | BNC×1, AUDIO×1 | BNC×1, PC AUDIO×1 |
| | Speaker | 2*2W | 2*2W | 2 W x 2, 6Ω |
| General | Input Voltages | DC 12V/3.0A (Power adapter) | AC 100-240V | 100 - 240 V AC, 50/60 Hz |
| | Power Consumption | < 30W(on) <0.5W(Standby) | < 30W(on) <0.5W(Standby) | ≤ 45 W |
| | Dimensions | 511.4mmx313.0mmx45.4mm | 561mmx338mmx45mm | 729mm x433mm x50mm |
| | Weight | 4.6Kg(Grossweight) , 3.2(Net weight) | 6.0Kg(Gross weight) , 5.1(Net weight) | 9.25 Kg(Gross weight) , 5.75 Kg(Net weight) |
| | VESA Mounting | 100mm × 100mm | 100mm × 100mm | 100 mm x 100 mm |
| | Operating Temperature | 0°C - 40 °C | 0°C - 40 °C | 0°C - 40°C |
| | Working Time | 7*24h | 7*24h | 7*24h |
| | Wall mounted Bracket (Optional) | DS-DM1940W | DS-DM1940W | DS-DM1940W |
| | Stand Bracket | Included by default | Included by default | Included by default |

Monitors







Value Series




Accessible and Affordable

Value Series monitors deliver 24/7 operation at an affordable price

- > Wide viewing angle
- > Multiple inputs: HDMI / VGA
- > 3D comb filter, 3D De-interlace, 3D noise reduction
- > Longer life span for critical performance and minimum TCO
- > Perfect integration and compatibility with DVRs and NVRs
- > Standard VESA bracket
- > On Duty 24/7 for Mission Critical Applications



| Model | DS-D5019QE | DS-D5019QE-B | DS-D5022QE-B | DS-D5022QE-E | DS-D5032QE | DS-D5043QE | |
|-----------|---|---|---|---|---|---|---|
| Image |  |  |  |  |  |  | |
| Display | Max Resolution | 1366×768 | 1366×768 | 1920×1080 | 1920×1080 | 1920×1080 | 1920 × 1080 |
| | Backlight | LED-Backlit TFT LCD | LED-Backlit TFT LCD | LED-Backlit TFT LCD | LED-Backlit TFT LCD | LED-Backlit TFT LCD | LED-Backlit TFT LCD |
| | Active Display Area | 18.5" | 18.5" | 21.5" | 21.5" | 31.5" | 42.5" |
| | Brightness | 200cd/m2 (Typical) | 200cd/m2 (Typical) | 250cd/m2 (Typical) | 200 cd/m² (Typical) | 300cd/m2 (Typical) | 360 cd/m2(Typical) |
| | Aspect Ratio | 16:9 | 16:9 | 16:9 | 16:9 | 16:9 | 16:9 |
| | Contrast Ratio | 600:1 | 600:1 | 1000:1 | 600: 1 | 1400:1 | 1200:1 |
| | Response Time | 5ms | 5ms | 5ms | 5ms | 8ms | 8ms |
| | Color | 16.7M | 16.7M | 16.7M | 16.7M | 16.7M | 16.7M |
| Interface | Viewing Angle | Horizontal 90°, Vertical 65° | Horizontal 90°, Vertical 65° | Horizontal 170°, Vertical 160° | Horizontal 90°, vertical 65° | Horizontal 178°, Vertical 178° | Horizontal 178°, Vertical 178° |
| | Input | VGA×1 | HDMI×1, VGA×1 | HDMI×1, VGA×1 | HDMI×1, VGA×1 | HDMI×1,VGA×1,Audio×1,RJ45(RS232)×1 | HDMI x1,VGAX 1,Audio In x1 |
| | Output | - | - | - | - | - | - |
| General | Speaker | - | - | - | - | 5W*2 | 5W*2 |
| | Input Voltages | AC100 - 240V, 50/60Hz | AC100 - 240V, 50/60Hz | AC100 - 240V, 50/60Hz | AC100 - 240V, 50/60Hz | AC100 - 240V, 50/60Hz | 100 to 240 V AC, 50/60Hz |
| | Power Consumption | ≤ 25W | ≤ 25W | < 30W(on) < 0.4W(Standby) | < 30W(on) < 0.5W(Standby) | < 55W(on) < 0.5W(Standby) | ≤75W 0.5W(Standby) |
| | Dimensions | 446mm×275mm ×45mm | 446mm×275mm ×45mm | 511mm×313mm ×46mm | 511mm×377mm ×170mm | 727mm×424mm ×64mm | 968.18mm×562.99mm ×76.8mm |
| | Weight | 3.5Kg(Grossweight) , 2.8Kg(Net weight) | 3.5Kg(Grossweight) , 2.8Kg(Net weight) | 4.5Kg(Grossweight) , 3.3Kg(Net weight) | 4.0Kg(Grossweight) , 3.2Kg(Net weight) | 6.763Kg(Grossweight) , 5.09Kg(Net weight) | 11.1Kg(Grossweight) , 8.2Kg(Net weight) |
| | VESA Mounting | 75mm x 75mm | 75mm x 75mm | 100mm × 100mm | 100mm × 100mm | 100mm × 100mm | 200mm*200mm |
| | Operating Temperature | 0°C - 40 °C | 0°C - 40 °C | 0°C - 40 °C | 0°C - 40 °C | 0°C - 40 °C | 5°C - 40°C |
| | Working Time | 7*24h | 7*24h | 7*24h | 7*24h | 7*24h | 7*24h |
| | Wall mounted Bracket (Optional) | DS-DM1940W | DS-DM1940W | DS-DM1940W | DS-DM1940W | DS-DM1940W | DS-DM4255W |
| | Stand Bracket | Included by default | Included by default | Included by default | Included by default | Included by default | Included by default |


| Model | | DS-D5022FN | DS-D5024FN | DS-D5027FN |
|-----------|---------------------------------|---|---|---|
| Image | |  |  |  |
| Display | Max Resolution | 1920 ×1080@60Hz | 1920 ×1080@60Hz | 1920 ×1080@60Hz |
| | Backlight | TFT-LED Backlight | TFT-LED Backlight | TFT-LED Backlight |
| | Active Display Area | 476× 268 mm | 527 × 296 mm | 598 × 336 mm |
| | Brightness | 250 cd/m ² | 250 cd/m ² | 300 cd/m ² |
| | Aspect Ratio | 16:9 | 16:9 | 16:9 |
| | Contrast Ratio | 3000: 1 | 1000: 1 | 1000: 1 |
| | Response Time | 13ms | 14ms | 14ms |
| | Color | 16.7M | 16.7M | 16.7M |
| | Viewing Angle | Horizontal 178°, vertical 178° | Horizontal 178°, vertical 178° | Horizontal 178°, vertical 178° |
| Interface | Input | VGA input 1 HDMI input 1 | VGA input 1 HDMI input 1 | VGA input 1 HDMI input 1 |
| | Output | - | - | - |
| | Speaker | - | - | - |
| General | Input Voltages | 100 to 240 VAC, 50/60Hz | 100 to 240 VAC, 50/60Hz | 100 to 240 VAC, 50/60Hz |
| | Power Consumption | ≤ 30W | ≤ 30W | ≤ 40W |
| | Dimensions | 489×378×167mm | 540×418×227mm | 614×454×226mm |
| | Weight | 4.44kg (Grossweight) , 2.75 kg(Net weight) | 4.44 kg (Grossweight) , 3.43 kg (Net weight) | 5.62 kg (Grossweight) , 4.06 kg (Net weight) |
| | VESA Mounting | 100 ×100 mm | 100 ×100 mm | 100 ×100 mm |
| | Operating Temperature | 0 to 40 ° C (32 to 104 ° F) | 0 to 40 ° C (32 to 104 ° F) | 0 to 40 ° C (32 to 104 ° F) |
| | Working Time | 7*24h | 7*24h | 7*24h |
| | Wall mounted Bracket (Optional) | DS-DM1940W | DS-DM1940W | DS-DM1940W |
| | Stand Bracket | Included by default | Included by default | Included by default |

Switches

150 Ultra Series

151 Pro Series


152 Value Series

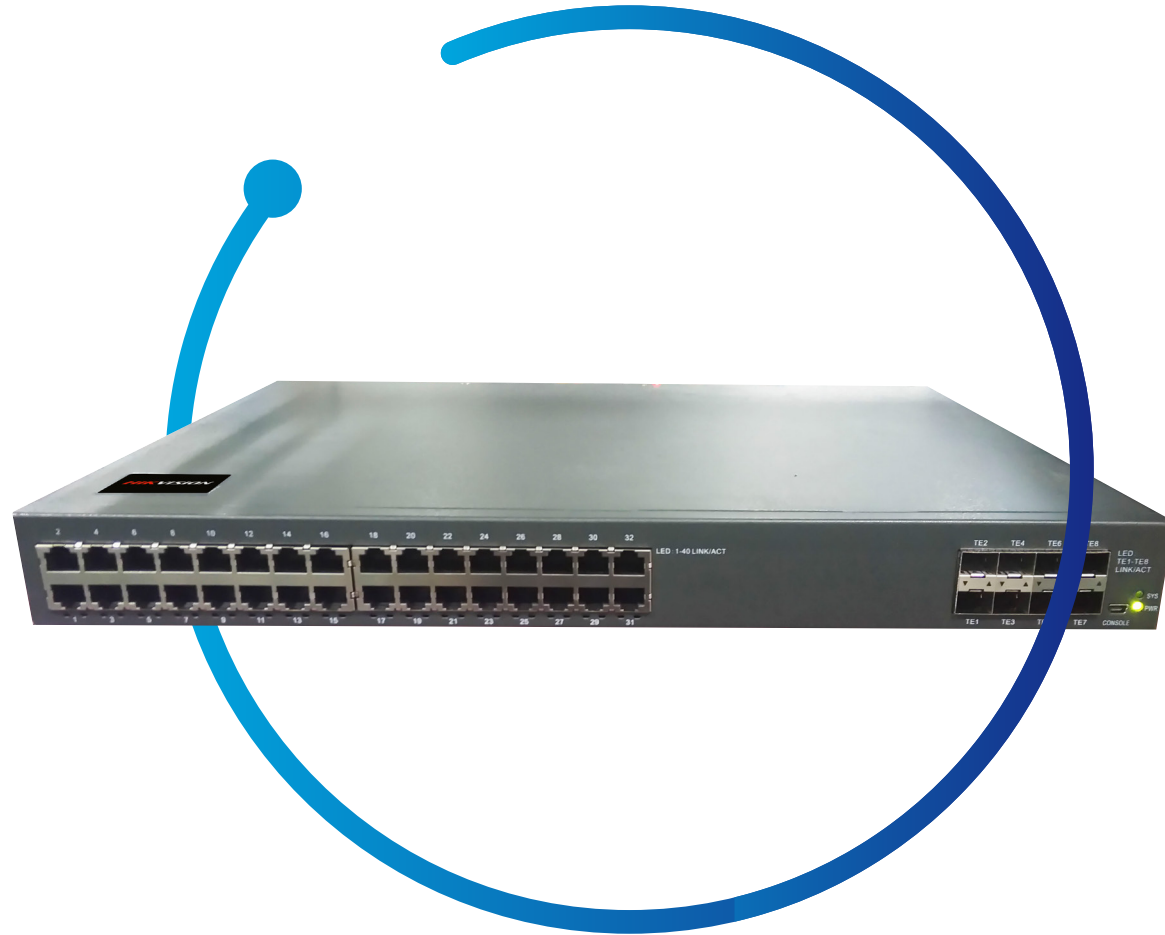

Switches


Smart Managed Switch

Hikvision smart managed switches help realize central and visualized management of all Hikvision IP devices with perfect integration with Hikvision software, providing comprehensive operation and maintenance capabilities based on a unified topology. Besides system topology, the network condition, device health status and alarm notification can also be displayed and managed in a visualized way, contributing to intelligent management and enhanced operation efficiency.

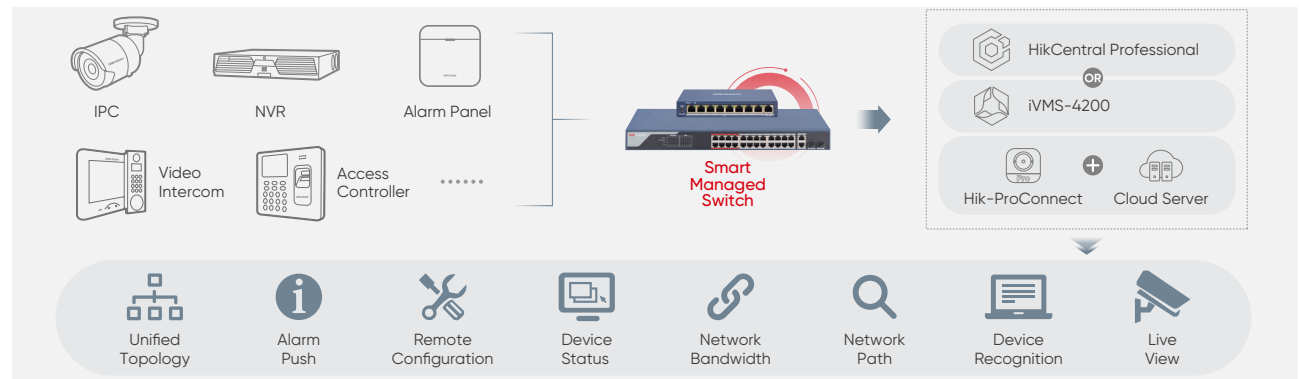

VIP Port Transmission Priority

- > VIP ports enjoy higher priority and more stable transmission when the switch is overloaded.
- > It's recommended to connect cameras in critical areas to VIP ports.

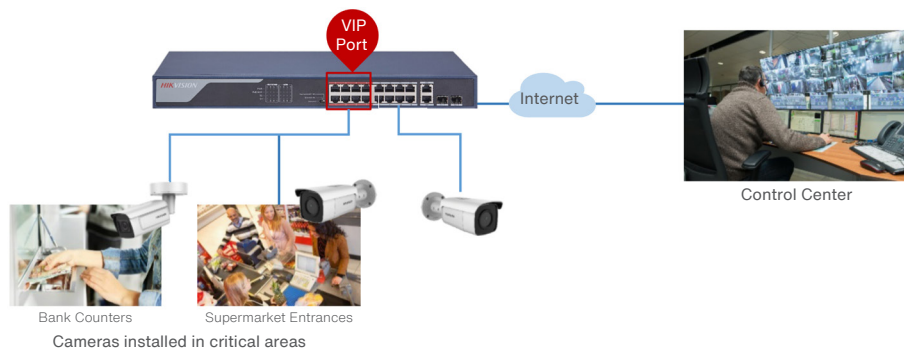


300 m Long Transmission Distance

- > Turn on the Extend Mode to increase the transmission distance to 300 m.
- > At 300 m transmission distance, the video is still smooth and stable.

Note:

- In Extend Mode, the bandwidth will drop to below 10 Mbps.
- CAT 6 cables support 300 m; CAT 5E cables support 250 m.

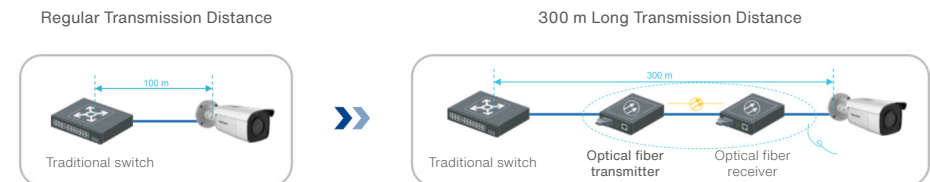

Switches

Ultra Series

Switch On for Powerful Transmission

- > IP route and full wire-speed L3 data package forwarding
- > IEEE802.1x, IP+MAC+port binding
- > Link aggregation
- > MPLS VPN P/PE, MPLS TE, and MPLS OAM
- > IRF
- > Multicast and QoS



L3 Series

| Model | DS-3E3756TF | DS-3E3740 | | |
|------------------|-----------------------------------|--|--|-------------------------|
| Image | | | | |
| Interface | Ethernet Port | 24, 10/100/1000M RJ45 ports 24, 1000M SFP ports | 32 10/100/1000M Base-T ports+8 10G SFP+ ports | |
| | Uplink Port | 8 10G SFP ports | 10G SFP+ ports | |
| Performance | Packet Forwarding Rate | 136Mpps | 136Mpps | |
| | Switching Capacity | 256Gbps | 224Gbps | |
| | MAC Address Table | 64K | 64K | |
| | Quality of Service | Flow classification based on L2-4 protocols CAR flow limit 802.1P/DSCP priority re-labeling SP, WRR, and "SP+WRR" Congestion avoidance mechanisms like Tail-Drop and WRED Flow monitoring and flow shaping | It supports speed limit on port direction and direction.Supports 8 priority queues per port.Support mapping from message 802.1p to different queues. Support SP, WRR and SP+WRR algorithm. Support for message priority and message redirection. Support L2 (Layer 2) -L4 (Layer 4) packet filtering function, provide source MAC address, destination MAC address, source IP address, destination IP address, TCP/UDP protocol source/destination port number, protocol, VLAN packet filtering function Support functions based on queue speed limit and port shaping. | |
| Managed Features | STP | 802.1D (STP), 802.1W (RSTP) and 802.1S (MSTP) BPDU protection, root protection, and loopback protection | Support STP (IEEE 802.1d), RSTP (IEEE 802.1w) and MSTP (IEEE 802.1s) protocol. | |
| | Multicast | IGMP v1/v2/v3 IGMP snooping IGMP Fast Leave Multicast group strategy and quantity limitation Multicast flow copying over VLANs | Supports IGMP v1/v2/v3 Snooping and fast leave mechanism Supports multicast forwarding in VLAN and multicast multi VLAN replication Multicast load sharing supporting bundled ports Supports controllable multicast Port based multicast traffic statistics Supports IGMP v1/v2/v3, PIM-SM, PIM-DM, PIM-SSM | |
| | VLAN | 4K VLAN; GVRP; QinQ; Private VLAN | Supports IEEE 802.1Q (VLAN), the whole machine supports 4K VLAN Supports GVRP Supports QinQ Supports VLAN based on MAC/ protocol /IP subnet / policy / port Supports Private VLAN Supports 1:1 and N:1 VLAN Mapping functions | |
| | Security | L2/L3/L4 ACL flow identification and filtration DDoS attack prevention, TCP's SYN Flood attack prevention, UDP Flood attack prevention, etc Broadcast/multicast/unknown unicast stormcontrol Port isolation Port security, and "IP+MAC+port" binding | Supports 802.1x, support single port maximum user number limit Storm suppression Filter User level management and password protection Supports AAA authentication, supports Radius, TACACS+ and many other ways Supports 802.1X authentication, supports MAC authentication, and supports MAC bypass authentication Supports to prevent DOS, ARP attack function, ICMP anti attack Supports binding of IP, MAC, port and VLAN Supports MAC address learning limit Supports DHCP Snooping Supports port isolation, Sticky MAC Supports MAC address filtering Supports SSH V2.0 Supports multicast, broadcast and unknown unicast message suppression Supports CPU protection function | |
| | Management and Maintenance | Console, Telnet, SSH2.0, Web SNMP v1/v2/v3 TFTP RMON Static/LACP link aggregation EAPS and ERPS | Console, Telnet, SSH2.0, Web SNMP v1/v2/v3 TFTP RMON | |
| | General | Power Supply | 100-240 V AC, 50/60 Hz | AC, 100V-240V, 50Hz±10% |
| | | Power Consumption | 55W | <50W |
| | | Dimension | 442.5mm×350mm×44mm | 442.5mm×315mm×44mm |

Switches

Pro Series

Switch More

Aggregate access switches and provide powerful management functions.

- > Layer 2, 100 M / 1,000 M network switch
- > Unmanaged or managed functions
- > 802.3af / at / bt PoE standard (on select models) and high PoE power budget
- > 8/4-core adaptable power supply to drastically reduce power loss (on select models)
- > Data from key cameras will be transmitted with priority to VIP ports (on select models)
- > EXTEND mode increases transmission distances to 300 m (on select models)
- > 6 KV surge protection ensures normal and reliable operation even in harsh conditions (on select models)
- > “Watchdog” function enables automatic camera detection, reducing manual inspection and restart and contributing to a self-healing network (on select models)
- > Smart managed switches can recognize IP devices and generate system topology for network information visualization



Unmanaged 1000M Series




| Model | | DS-3E0524TF | DS-3E0505-E | DS-3E0508-E(B) | DS-3E0516-E(B) | DS-3E0524-E(B) |
|-------------|------------------------|---|---|---|---|---|
| Image | |  |  |  |  |  |
| Interface | Ethernet Port | 12 x Gigabit Ethernet electrical ports , 12 x Gigabit SFP fiber optical port | 5 x 1000M Ethernet port | 8 x 1000M Ethernet port | 16 x 1000M Ethernet port | 24 x 1000M Ethernet port |
| | Uplink Port | - | - | - | - | - |
| | Lightning Protection | - | - | - | - | - |
| Performance | Packet Forwarding Rate | 35.7 Mpps | 7.44 Mpps | 11.904 Mpps | 23.808 Mpps | 35.712 Mpps |
| | Switching Capacity | 48 Gbps | 10 Gbps | 16 Gbps | 32 Gbps | 48 Gbps |
| | MAC Address Table | 16 K | 2 K | 4 K | 8 K | 8 K |
| General | Power Supply | 220 VAC | 5 VDC , 1 A | 5 VDC , 1 A | 220 VAC , 50/60 Hz , Max. 0.3 A | 220 VAC , 50/60 Hz , Max. 0.7 A |
| | Power Consumption | 30 W | - | - | - | - |
| | Dimension | 440 mm×44.5 mm×186.5 mm | 103 mm × 25.6 mm × 61.1 mm | 145 mm × 25.6 mm × 68.4 mm | 257 mm × 44.5 mm ×175.8 mm | 335 mm × 44.5 mm ×175.8 mm |

Unmanaged 1000M POE Series


| Model | DS-3E0505P-E | DS-3E0510P-E | DS-3E0518P-E | DS-3E0526P-E | |
|------------------|---|--|---|---|--|
| Image |  |  |  |  | |
| Interface | Ethernet Port | 4 × Gigabit PoE ports, and 1 × Gigabit RJ45 port | 8 × Gigabit PoE ports, 1 × Gigabit RJ45 port | 16 × Gigabit PoE ports, 1 × Gigabit RJ45 port | 24 × Gigabit PoE ports, 1 × Gigabit RJ45 port |
| | Uplink Port | 1 × Gigabit RJ45 port | 1 × Gigabit RJ45 port and 1 × Gigabit SFP fiber optical port | 1 × Gigabit RJ45 port and 1 × Gigabit SFP fiber optical port | 1 × Gigabit RJ45 port and 1 × Gigabit SFP fiber optical port |
| | High Priority Port (default) | - | - | - | - |
| | PoE Standards | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at |
| | PoE Ports | Ports 1 to 4 | Ports 1 to 8 | Ports 1 to 16 | Ports 1 to 24 |
| | PoE Budget | 60 W | 110 W | 230 W | 370 W |
| | PoE Extend Mode | - | - | - | - |
| | Surge Protection | 6 KV | 6 KV | 6 KV | 6 KV |
| | Hi-PoE | - | - | - | - |
| Dialing function | Long range | - | - | - | - |
| | Port isolation | - | - | - | - |
| | PoE watchdog | - | - | - | - |
| Performance | Packet Forwarding Rate | 7.44 Mpps | 14.88 Mpps | 26.784 Mpps | 38.688 Mpps |
| | Switching Capacity | 10 Gbps | 20 Gbps | 36 Gbps | 52 Gbps |
| | MAC Address Table | 2 K | 4 K | 8 K | 8 K |
| General | Power Supply | 48 VDC, 1.35 A | 48 VDC, 2.5 A | 100 to 240 VAC, 50/60 Hz, Max. 4 A | 100 to 240 VAC, 50/60 Hz, Max. 6.5 A |
| | Power Consumption | 65 W | 120W | 250 W | 400 W |
| | Dimension | 105 mm × 27.6 mm × 83.1 mm | 217.6 mm × 27.8 mm × 108.55 mm | 440 mm × 44 mm × 220.8 mm | 440 mm × 44 mm × 220.8 mm |

| Model | DS-3E0505HP-E | DS-3E0510HP-E | DS-3E0520HP-E | DS-3E0528HP-E | |
|------------------|---|--|---|---|---|
| Image |  |  |  |  | |
| Interface | Ethernet Port | 3 × gigabit PoE ports, 1 × gigabit Hi-PoE port | 6 × gigabit PoE ports, 2 × gigabit Hi-PoE ports | 12 × gigabit PoE ports, 4 × gigabit Hi-PoE ports, | 20 × gigabit PoE ports, 4 × gigabit Hi-PoE ports |
| | Uplink Port | 1 × gigabit RJ45 port | 1 × gigabit RJ45 port, and 1 × gigabit fiber optical port | 2 × gigabit RJ45 ports, and 2 × gigabit fiber optical ports | 2 × gigabit RJ45 ports, and 2 × gigabit fiber optical ports |
| | High Priority Port (default) | - | - | - | - |
| | PoE Standards | Port 1: IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt Ports 2 to 4: IEEE 802.3af, IEEE 802.3at | Ports 1 and 2: IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt Ports 3 to 8: IEEE 802.3af, IEEE 802.3at | Ports 1 to 4: IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt Ports 5 to 16: IEEE 802.3af, IEEE 802.3at | Ports 1 to 4: IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt Ports 5 to 24: IEEE 802.3af, IEEE 802.3at |
| | PoE Ports | Ports 1 to 4 | Ports 1 to 8 | Ports 1 to 16 | Ports 1 to 24 |
| | PoE Budget | 60 W | 110 W | 225 W | 370 W |
| | PoE Extend Mode | Ports 3 and 4 support | Ports 7 and 8 support | Ports 13 to 16 support | Ports 21 to 24 support |
| | Surge Protection | 6 KV | 6 KV | 6 KV | 6 KV |
| | Hi-PoE | IEEE 802.3bt 60W | IEEE 802.3bt 90W | IEEE 802.3bt 90W | IEEE 802.3bt 90W |
| Dialing function | Long range | Ports 3 and 4: up to 300 m; and the speed rate of the port is 10 Mbps. | Ports 7 and 8: up to 300 m; and the speed rate of the port is 10 Mbps. | Ports 13 to 16: up to 300 m; and the speed rate of the port is 10 Mbps | Ports 21 to 24: up to 300 m; and the speed rate of the port is 10 Mbps |
| | Port isolation | Ports 1 to 4: port isolation mode to improve network security. | Ports 1 to 8: port isolation mode to improve network security. | Ports 1 to 16: port isolation mode to improve network security. | Ports 1 to 24: port isolation mode to improve network security. |
| | PoE watchdog | Ports 1 to 4: auto detect and restart the cameras that do not respond. | Ports 1 to 8: auto detect and restart the cameras that do not respond. | Ports 1 to 16: auto detect and restart the cameras that do not respond. | Ports 1 to 24: auto detect and restart the cameras that do not respond. |
| Performance | Packet Forwarding Rate | 7.44 Mpps | 14.88 Mpps | 29.76 Mpps | 41.664 Mpps |
| | Switching Capacity | 10 Gbps | 20 Gbps | 40 Gbps | 56 Gbps |
| | MAC Address Table | 2 K | 4 K | 8 K | 8 K |
| General | Power Supply | 48 VDC, 1.35 A | 54 VDC, 2.22 A | 100 to 240 VAC, 50/60Hz, Max. 4 A | 100 to 240 VAC, 50/60Hz, Max. 6.5 A |
| | Power Consumption | 65 W | 120 W | 250 W | 400 W |
| | Dimension | 121 mm × 88.1 mm × 27.6 mm | 217.6 mm × 108.55 mm × 27.8 mm | 440 mm × 220.8 mm × 44 mm | 440 mm × 220.8 mm × 44 mm |


Full Managed Series




| Model | DS-3E2310P | DS-3E2318P | DS-3E2326P | DS-3E2528P | DS-3E2510P | DS-3E2528 | |
|------------------|---|--|--|--|---|---|--|
| Image |  |  |  |  |  |  | |
| Interface | Ethernet Port | 8 x 10/100Mbps RJ45 ports | 16 x 10/100Mbps RJ45 ports, | 24 x 10/100Mbps RJ45 ports, | 24 x 10/100M/1000M RJ45 ports | 8 x 10/100/1000M RJ45 ports | 24 x 10/100/1000Base-T ports |
| | Uplink Port | 2 x 1000M Combo Port (2 Ethernet Ports and 2 SFP Ports) | 2 x 1000M Combo Port (2 Ethernet Ports and 2 SFP Ports) | 2 x 1000M Combo Port (2 Ethernet Ports and 2 SFP Ports) | 4 x 1000Base-X SFP ports | 2 x 1000Base-X SFP ports | 4 1000Base-X SFP ports |
| | High Priority Port (default) | - | - | - | - | - | - |
| | POE Standards | IEEE 802.3af, IEEE802.3at | IEEE 802.3af, IEEE802.3at | IEEE 802.3af, IEEE802.3at | IEEE802.3af, IEEE802.3at | IEEE802.3af, IEEE802.3at | - |
| | PoE Ports | Ports 1-8 | Ports 1-16 | Ports 1-24 | Ports 1-24 | Ports 1-8 | - |
| | PoE Budget | 125W | 300W | 380W | 380W | 125W | - |
| | PoE Extend Mode | - | - | - | - | - | - |
| Performance | Lightning Protection | 2KV | 2KV | 2KV | 2KV | 2KV | - |
| | Packet Forwarding Rate | 5.6Mpps | 8.4Mpps | 9.6Mpps | 42Mpps | 15Mpps | 42Mpps |
| | Switching Capacity | 10Gbps | 21.2Gbps | 22.8Gbps | 56Gbps | 20Gbps | 56Gbps |
| Managed Features | MAC Address Table | 8K | 8K | 8K | 8K | 8K | 8K |
| | Quality of Service | Flow classification based on L2-4 protocols, CAR flow limit 802.1P/DSCP priority re-labeling, SP, WRR, and "SP+WRR" Congestion avoidance mechanisms like Tail-Drop and WRED Flow monitoring and flow shaping | Flow classification based on L2-4 protocols, CAR flow limit 802.1P/DSCP priority re-labeling, SP, WRR, and "SP+WRR" Congestion avoidance mechanisms like Tail-Drop and WRED Flow monitoring and flow shaping | Flow classification based on L2-4 protocols, CAR flow limit 802.1P/DSCP priority re-labeling, SP, WRR, and "SP+WRR" Congestion avoidance mechanisms like Tail-Drop and WRED Flow monitoring and flow shaping | Flow classification based on L2-4 protocols, CAR flow limit 802.1P/DSCP priority re-labeling, SP, WRR, and "SP+WRR" Congestion avoidance mechanisms like Tail-Drop and WRED Flow monitoring and flow shaping | Flow classification based on L2-4 protocols, CAR flow limit 802.1P/DSCP priority re-labeling, SP, WRR, and "SP+WRR" Congestion avoidance mechanisms like Tail-Drop and WRED Flow monitoring and flow shaping | Flow classification based on L2-4 protocols, CAR flow limit 802.1P/DSCP priority re-labeling, SP, WRR, and "SP+WRR" Congestion avoidance mechanisms like Tail-Drop and WRED Flow monitoring and flow shaping |
| | L2 and L2+ Features | IEEE 802.1d STP, IEEE 802.1w RSTP IGMP Snooping, IGMP v1/v2, link aggregation | IEEE 802.1d STP, IEEE 802.1w RSTP IGMP Snooping, IGMP v1/v2, link aggregation | IEEE 802.1d STP, IEEE 802.1w RSTP IGMP Snooping, IGMP v1/v2, link aggregation | IEEE 802.1d STP, IEEE 802.1w RSTP IGMP Snooping, IGMP v1/v2, link aggregation | IEEE 802.1d STP, IEEE 802.1w RSTP IGMP Snooping, IGMP v1/v2, link aggregation | Flow classification based on L2-4 protocols L2/L3/L4 ACL flow identification and filtration control L2-L7 data, providing carriers flexible and various policy control methods L2 multicast functions such as IGMP-snooping, user fast-leave mechanism and trans-vlan multicast copy |
| | VLAN | 4K VLAN; GVRP; QinQ; Private VLAN | 4K VLAN; GVRP; QinQ; Private VLAN | 4K VLAN; GVRP; QinQ; Private VLAN | 4K VLAN; GVRP; QinQ; Private VLAN | 4K VLAN; GVRP; QinQ; Private VLAN | 4K VLAN; GVRP; QinQ; Private VLAN |
| | Security | L2/L3/L4 ACL flow identification and filtration, DDoS attack prevention, TCP's SYN Flood attack prevention, UDP Flood attack prevention, etc Broadcast/multicast/unknown unicast stormcontrol Port isolation Port security, and "IP+MAC+port" binding. | L2/L3/L4 ACL flow identification and filtration, DDoS attack prevention, TCP's SYN Flood attack prevention, UDP Flood attack prevention, etc Broadcast/multicast/unknown unicast stormcontrol Port isolation Port security, and "IP+MAC+port" binding. | L2/L3/L4 ACL flow identification and filtration, DDoS attack prevention, TCP's SYN Flood attack prevention, UDP Flood attack prevention, etc Broadcast/multicast/unknown unicast stormcontrol Port isolation Port security, and "IP+MAC+port" binding. | L2/L3/L4 ACL flow identification and filtration DDoS attack prevention, TCP's SYN Flood attack prevention, UDP Flood attack prevention, etc Broadcast/multicast/unknown unicast storm-control Port isolation Port security, and "IP+MAC+port" binding | L2/L3/L4 ACL flow identification and filtration DDoS attack prevention, TCP's SYN Flood attack prevention, UDP Flood attack prevention, etc Broadcast/multicast/unknown unicast storm-control Port isolation Port security, and "IP+MAC+port" binding | L2/L3/L4 ACL flow identification and filtration DDoS attack prevention, TCP's SYN Flood attack prevention, UDP Flood attack prevention, etc Broadcast/multicast/unknown unicast storm-control Port isolation Port security, and "IP+MAC+port" binding |
| General | Management and Maintenance | Console, Telnet, SSH2.0, Web SNMP v1/v2/v3, TFTP, RMON | Console, Telnet, SSH2.0, Web SNMP v1/v2/v3, TFTP, RMON | Console, Telnet, SSH2.0, Web SNMP v1/v2/v3, TFTP, RMON | Console, Telnet, SSH2.0, Web SNMP v1/v2/v3, TFTP, RMON | Console, Telnet, SSH2.0, Web SNMP v1/v2/v3, TFTP, RMON | Console, Telnet, SSH2.0, Web SNMP v1/v2/v3, TFTP, RMON |
| | Power Supply | 100-240 VAC, 50/60 Hz | 100-240 VAC, 50/60 Hz | 100-240 VAC, 50/60 Hz | 100V-240VAC, 50Hz±10% | 100V-240VAC, 50Hz±10% | AC: 100V-240V, 50Hz±10% |
| | Power Consumption | 140W | 330W | 400W | 395W | 140W | 15W |
| Dimension | 280 mm × 179 mm × 45 mm | 440 mm × 232 mm × 44 mm | 440 mm × 232 mm × 44 mm | 440 mm × 45 mm × 232 mm | 280 mm × 45 mm × 179 mm | 440 mm × 45 mm × 230 mm | |

Unmanaged POE Series

| Model | | DS-3E0106HP-E | DS-3E0310HP-E | DS-3E0105P-E(B) | DS-3E0109P-E(C) | DS-3E0318P-E(B) | DS-3E0326P-E(B) |
|------------------|------------------------------|--|--|--|---|---|---|
| Image | |  |  |  |  |  |  |
| Interface | Ethernet Port | 1 × 10/100 Mbps Hi-PoE port, 3 × 10/100 Mbps PoE ports, and 2 × 10/100 Mbps RJ45 ports | 1 × 10/100 Mbps Hi-PoE port, 7 × 10/100 Mbps PoE ports, and 2 × 10/100/1000 Mbps RJ45 ports | 4 × 100 Mbps PoE ports, 1 × 100 Mbps Ethernet port | 8 × 100 Mbps PoE ports, 1 × 100 Mbps Ethernet port | 16 × 100 Mbps PoE ports, 2 × 1000 Mbps combos | 24 × 100 Mbps PoE ports, 2 × 1000 Mbps combos |
| | Uplink Port | 2 × 10/100 Mbps RJ45 uplink ports | 2 × 10/100/1000 Mbps RJ45 uplink ports | 1 × 100 Mbps RJ45 uplink ports | 1 × 100 Mbps RJ45 uplink ports | 2 × 1000 Mbps Combos uplink ports | 2 × 1000 Mbps Combos uplink ports |
| | High Priority Port (default) | Ports 1 to 2 | - | Ports 1 to 2 | Ports 1 to 2 | Ports 1 to 8 | Ports 1 to 8 |
| | PoE Standards | Port 1: IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt Ports 2 to 4: IEEE 802.3af, IEEE 802.3at | Port 1: IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt Ports 2 to 8: IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at |
| | PoE Ports | Port 1 to 4 | Port 1 to 8 | Port 1 to 4 | Port 1 to 8 | Port 1 to 16 | Port 1 to 24 |
| | PoE Budget | 60 W | 110 W | 60 W | 115 W | 230 W | 370 W |
| | Hi-PoE | IEEE 802.3bt 60W | IEEE 802.3bt 60W | - | - | - | - |
| | PoE Extend Mode | Max. 250 m | Max. 250 m | Max. 250 m | Max. 250 m | Max. 250 m | Max. 250 m |
| | Surge Protection | 6 KV | 6 KV | 6 KV | 6 KV | 6 KV | 6 KV |
| Dialing function | Long range | Support up to 250 m transmission | Support up to 250 m transmission | Support up to 250 m transmission | Support up to 250 m transmission | Support up to 250 m transmission | Support up to 250 m transmission |
| | Port isolation | - | - | - | - | - | - |
| | PoE watchdog | - | - | - | - | - | - |
| Performance | Packet Forwarding Rate | 0.893 Mpps | 4.166 Mpps | 0.744 Mpps | 1.339 Mpps | 5.356 Mpps | 6.547 Mpps |
| | Switching Capacity | 1.2 Gbps | 5.6 Gbps | 1 Gbps | 1.8 Gbps | 7.2 Gbps | 8.8 Gbps |
| | MAC Address Table | 2 K | 16 K | 1 K | 2 K | 4 K | 4 K |
| General | Power Supply | 48 VDC, 1.35 A | 48 VDC, 2.5 A | 48 VDC, 1.35 A | 48 VDC, 2.5 A | 100 to 240 VAC, 50/60 Hz, Max. 4 A | 100 to 240 VAC, 50/60 Hz, Max. 6.5 A |
| | Power Consumption | 65 W | 120 W | 65 W | 120 W | 250 W | 400 W |
| | Dimension | 145 mm × 25.6 mm × 68.45 mm | 217.6 mm × 27.8 mm × 103.35 mm | 105 mm × 27.6 mm × 83.1 mm | 170 mm × 27.6 mm × 93.1 mm | 440 mm × 44 mm × 220.8 mm | 440 mm × 44 mm × 220.8 mm |

Industrial Grade PoE Series

| Model | | DS-3T0306P | DS-3T0310P | DS-3T0306HP-E/HS |
|------------------|--|--|---|---|
| Image | |  |  |  |
| Standards | | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at | Port 1: IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt Ports 2 to 4: IEEE 802.3af, IEEE 802.3at |
| Interface | Ethernet Port | 4 100M Base-T ports+2 1000Base-X ports | 8 100M Base-T ports+2 1000Base-X ports | 3 × 100M PoE ports, 1 × Hi-PoE port |
| | Uplink Port | 2 1000Base-X SFP ports | 2 1000Base-X SFP ports | 1 × gigabit RJ45 port and 1 × gigabit SFP Fiber Optical Port |
| | High Priority Port (default) | - | - | - |
| | PoE Budget | 120w | 240w | 60 W |
| | PoE Extend Mode | - | - | Max. 300 m |
| | PoE Ports | Port 1 to 4 | Port 1 to 8 | Ports 1 to 4 |
| | Hi-PoE | - | - | IEEE 802.3bt 60W |
| Dialing function | Surge Protection | 6KV | 6KV | 6KV |
| | Long range | - | - | Ports 3 and 4: up to 300 m |
| | Port isolation | - | - | Ports 1 to 4: port isolation mode to improve network security |
| | PoE watchdog | - | - | Ports 1 to 4: auto detect and restart the cameras that do not respond |
| Performance | Packet Forwarding Rate | 3.6Mpps | 4.2Mpps | 3.5712 Mpps |
| | Switching Capacity/ Backplane | 8.8Gbps | 8.8Gbps | 4.8 Gbps |
| | MAC Address Table | 4K | 4K | 2 K |
| Managed Features | Quality of Service | - | - | - |
| | L2 and L2+ Features | - | - | - |
| | VLAN | - | - | - |
| | Security | - | - | - |
| General | Management and Maintenance | - | - | - |
| | Power Supply | DC:44-57VDC | | 48 to 57 VDC, 1.35 A Max |
| | Power Requirements (max.) | - | - | 65 W |
| | Dimension | 155 mm x 130 mm x 42 mm | 170 mm x 156 mm x 42 mm | 158 mm × 101.2 mm × 31.6 mm |
| | Environment | Operating temperature / humidity: -40°C-75°C, 5%-95% non-condensing Storage temperature / humidity: -40°C-85°C, 5%-95% non-condensing | | Operating temperature / humidity: -30 °C to 65 °C (-22 °F to 149°F), 5%-95% non-condensing Storage temperature / humidity: -40 °C to 85 °C (-40 °F to 185 °F), 5%-95% non-condensing |
| | Protection Grade | IP40 | | - |
| | EMI | FCC 47 CFR Part 15 Class A EN55022 Class A | | FCC 47 CFR Part 15 Class A EN55022 Class A |
| EMS | IEC [EN] I61000-4-2, Class 4 IEC [EN] I61000-4-4, Class 2 IEC [EN] I61000-4-5, Class 2 IEC [EN] I61000-4-11, Class 4 IEC [EN] I61000-4-12, Class 4 | | IEC [EN] I61000-4-2, Class 4 IEC [EN] I61000-4-4, Class 2 IEC [EN] I61000-4-5, Class 2 IEC [EN] I61000-4-11, Class 4 | |

| Model | DS-3T0310HP-E/HS | DS-3T0506HP-E/HS | DS-3T0510HP-E/HS | |
|------------------|---|--|--|--|
| Image |  |  |  | |
| Standards | Ports 1 and 2: IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt Ports 3 to 8: IEEE 802.3af, IEEE 802.3at | Port 1: IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt Ports 2 to 4: IEEE 802.3af, IEEE 802.3at | Ports 1 and 2: IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt Ports 3 to 8: IEEE 802.3af, IEEE 802.3at | |
| Interface | Ethernet Port | 6 × 100M PoE ports, 2 × Hi-PoE port | 3 × gigabit PoE ports, 1 × gigabit Hi-PoE port | 6 × gigabit PoE RJ45 ports, 2 × gigabit Hi-PoE RJ45 ports |
| | Uplink Port | 1 × gigabit RJ45 port and 1 × gigabit SFP fiber optical port | 2 × gigabit SFP fiber optical ports | 2 × gigabit SFP fiber optical ports |
| | High Priority Port (default) | - | - | - |
| | PoE Budget | 110 W | 60 W | 110 W |
| | PoE Extend Mode | Max. 300 m | Max. 300 m | Max. 300 m |
| | PoE Ports | Ports 1 to 8 | Ports 1 to 4 | Ports 1 to 8 |
| | Hi-PoE | IEEE 802.3bt 90W | IEEE 802.3bt 60W | IEEE 802.3bt 90W |
| Dialing function | Surge Protection | 6KV | 6KV | 6KV |
| | Long range | Ports 7 and 8: up to 300 m | Ports 3 and 4: up to 300 m | Ports 7 and 8: up to 300 m |
| | Port isolation | Ports 1 to 8: port isolation mode to improve network security | Ports 1 to 4: port isolation mode to improve network security | Ports 1 to 8: port isolation mode to improve network security |
| Performance | PoE watchdog | Ports 1 to 8: auto detect and restart the cameras that do not respond | Ports 1 to 4: auto detect and restart the cameras that do not respond | Ports 1 to 8: auto detect and restart the cameras that do not respond |
| | Packet Forwarding Rate | 4.1664 Mpps | 8.928 Mpps | 14.88 Mpps |
| | Switching Capacity/Backplane | 5.6 Gbps | 22 Gbps | 20 Gbps |
| Managed Features | MAC Address Table | 2 K | 4 K | 4 K |
| | Quality of Service | - | - | - |
| | L2 and L2+ Features | - | - | - |
| | VLAN | - | - | - |
| | Security | - | - | - |
| | Management and Maintenance | - | - | - |
| | Power Supply | 48 to 57 VDC, 2.5 A Max | 48 to 57 VDC, 1.35 A Max | 48 to 57 VDC, 2.5 A Max |
| General | Power Requirements (max.) | 120 W | 65 W | 120 W |
| | Dimension | 197 mm × 114.2 mm × 42.2 mm | 158 mm × 101.2 mm × 31.6 mm | 197 mm × 114.2 mm × 42.2 mm |
| | Environment | Operating temperature / humidity: -30 °C to 65 °C (-22 °F to 149 °F), 5%-95% non-condensing Storage temperature / humidity: -40 °C to 85 °C (-40 °F to 185 °F), 5%-95% non-condensing | Operating temperature / humidity: -30 °C to 65 °C (-22 °F to 149 °F), 5%-95% non-condensing Storage temperature / humidity: -40 °C to 85 °C (-40 °F to 185 °F), 5%-95% non-condensing | Operating temperature / humidity: -30 °C to 65 °C (-22 °F to 149 °F), 5%-95% non-condensing Storage temperature / humidity: -40 °C to 85 °C (-40 °F to 185 °F), 5%-95% non-condensing |
| | Protection Grade | - | - | - |
| | EMI | FCC 47 CFR Part 15 Class A EN55022 Class A | FCC 47 CFR Part 15 Class A EN55022 Class A | FCC 47 CFR Part 15 Class A EN55022 Class A |
| | EMS | IEC (EN) I61000-4-2, Class 4 IEC (EN) I61000-4-4, Class 2 IEC (EN) I61000-4-5, Class 2 IEC (EN) I61000-4-11, Class 4 | IEC (EN) I61000-4-2, Class 4 IEC (EN) I61000-4-4, Class 2 IEC (EN) I61000-4-5, Class 2 IEC (EN) I61000-4-11, Class 4 | IEC (EN) I61000-4-2, Class 4 IEC (EN) I61000-4-4, Class 2 IEC (EN) I61000-4-5, Class 2 IEC (EN) I61000-4-11, Class 4 |

Smart Managed Series

| Model | | DS-3E1105P-EI | DS-3E1309P-EI | DS-3E1318P-EI | DS-3E1326P-EI | DS-3E1310P-SI |
|------------------|------------------------------|---|--|---|---|---|
| Image | |  NEW |  NEW |  NEW |  NEW |  NEW |
| Interface | Ethernet Port | 4 × 100Mbps PoE RJ45 ports | 8 × 100Mbps PoE RJ45 ports | 16 × 100Mbps PoE RJ45 ports | 24 × 100Mbps PoE RJ45 ports | 8 × 100 Mbps PoE RJ45 port |
| | Uplink Port | 1 × 100Mbps network RJ45 port | 1 × gigabit network RJ45 port | 2 × gigabit combs | 2 × gigabit combs | 2 × gigabit combo |
| | High Priority Port (default) | - | - | Ports 1 to 8 | Ports 1 to 8 | - |
| | PoE Standards | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at |
| | PoE Ports | Ports 1 to 4 | Ports 1 to 8 | Ports 1 to 16 | Ports 1 to 24 | Ports 1 to 8 |
| | PoE Budget | 60 W | 110 W | 230 W | 370 W | 125 W |
| | Hi-PoE | - | - | - | - | - |
| | PoE Extend Mode | Max. 250 m | Max. 250 m | Max. 250 m | Max. 250 m | Max. 300 m |
| | Surge Protection | 6KV | 6KV | 6KV | 6KV | 6KV |
| Dialing function | Long range | Ports 1 to 4: up to 250 m transmission | Ports 1 to 8: up to 250 m transmission | Ports 1 to 16: up to 250 m transmission | Ports 1 to 24: up to 250 m transmission | Ports 1 to 8: up to 300 m transmission |
| | Port isolation | - | - | - | - | Ports in isolation group cannot communicate with each other |
| | PoE watchdog | - | - | - | - | Ports 1 to 8 auto detect and restart the cameras that do not respond. |
| Performance | Packet Forwarding Rate | 0.744 Mpps | 2.6784 Mpps | 5.3568 Mpps | 6.5472 Mpps | 4.1664 Mpps |
| | Switching Capacity | 1 Gbps | 3.6 Gbps | 7.2 Gbps | 8.8 Gbps | 5.6 Gbps |
| | MAC Address Table | 2 K | 16 K | 4 K | 4 K | 16 K |
| General | Power Supply | 48 VDC, 1.35 A | 48 VDC, 2.5 A | 100-240 VAC, 50/60Hz, Max. 2.5 A | 100-240 VAC, 50/60Hz, Max. 6.5 A | 100 VAC-240 VAC, 50/60 Hz, Max. 1.5 A |
| | Power Consumption | 65 W | 120 W | 250 W | 400 W | 5 W |
| | Dimension | 105 mm × 27.6 mm × 83.1 mm | 170 mm × 27.6 mm × 93.1 mm | 440 mm × 44 mm × 220.8 mm | 440 mm × 44 mm × 221 mm | 266 mm × 44.5 mm × 220.8 mm |

| Model | DS-3E1318P-SI | DS-3E1326P-SI | DS-3E1510P-SI | DS-3E1518P-SI | DS-3E1526P-SI | |
|------------------|--|---|--|--|--|---|
| Image |  <NEW> |  <NEW> |  <NEW> |  <NEW> |  <NEW> | |
| Interface | Ethernet Port | 16 × 100 Mbps PoE RJ45 port | 24 × 100 Mbps PoE RJ45 port | 8 × gigabit PoE ports | 16 × gigabit PoE ports | 24 × gigabit PoE ports |
| | Uplink Port | 2 × gigabit combo | 2 × gigabit combo | 2 × gigabit fiber optical ports | 2 × gigabit fiber optical ports | 2 × gigabit fiber optical ports |
| | High Priority Port (default) | Ports 1 to 8 | Ports 1 to 8 | - | - | - |
| | PoE Standards | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at |
| | PoE Ports | Ports 1 to 16 | Ports 1 to 24 | Ports 1 to 8 | Ports 1 to 16 | Ports 1 to 24 |
| | PoE Budget | 230 W | 370 W | 110W | 225W | 370W |
| | Hi-PoE | - | - | - | - | - |
| | PoE Extend Mode | Max. 300 m | Max. 300 m | Max. 300 m | Max. 300 m | Max. 300 m |
| | Surge Protection | 6KV | 6KV | 6KV | 6KV | 6KV |
| Dialing function | Long range | Ports 1 to 16: up to 300 m transmission | Ports 1 to 24: up to 300 m transmission | Ports 1 to 8: up to 300 m transmission | Ports 1 to 16: up to 300 m transmission | Ports 1 to 24: up to 300 m transmission |
| | Port isolation | Ports in isolation group cannot communicate with each other | Ports in isolation group cannot communicate with each other | Ports in isolation group cannot communicate with each other | Ports in isolation group cannot communicate with each other | Ports in isolation group cannot communicate with each other |
| | PoE watchdog | Ports 1 to 16 auto detect and restart the cameras that do not respond. | Ports 1 to 24 auto detect and restart the cameras that do not respond | Ports 1 to 8 auto detect and restart the cameras that do not respond | Ports 1 to 16 auto detect and restart the cameras that do not respond | Ports 1 to 24 auto detect and restart the cameras that do not respond |
| Performance | Packet Forwarding Rate | 5.3568 Mpps | 6.5472 Mpps | 14.88 Mpps | 26.784 Mpps | 36.688 Mpps |
| | Switching Capacity | 7.2 Gbps | " 8.8 Gbps" | 20 Gbps | 36 Gbps | 52 Gbps |
| | MAC Address Table | 16 K | 16 K | 8 K | 8 K | 8 K |
| General | Power Supply | " 100 VAC-240 VAC, 50/60 Hz, Max. 2.5 A" | 100 VAC-240 VAC, 50/60 Hz, Max. 6.5 A | 48 VDC, 2.5 A | 100 to 240 VAC, 50/60 Hz, Max. 4 A | 100 to 240 VAC, 50/60 Hz, Max. 6.5 A |
| | Power Consumption | 5 W | 5 W | 7 W | 25 W | 30 W |
| | Dimension | 440 mm × 44 mm × 220.8 mm | 440 mm × 44 mm × 221 mm | 217.6 mm × 108.55 mm × 27.8 mm | 440 mm × 220.8 mm × 44 mm | 440 mm × 221 mm × 44 mm |

Switches

Value Series

Switch On and Stay On

Provide stable power supply and data transmission for cameras.





- › Layer 2, 100 M / 1,000 M network switch
- › Plug and play
- › 802.3 af / at PoE standard (on select models)
- › 8/4-core adaptable power supply drastically reduces power loss (on select models)
- › EXTEND mode increases transmission distances to 300 m (on select models)
- › Intelligent power sequencing prevents random power loss for cameras and prolongs service life of switches (on select models)
- › Increased bandwidth enables stable transmission of larger amount of data







Economic Unmanaged POE Series

| Model | DS-3E0105P-E/M(B) | DS-3E0106P-E/M | DS-3E0109P-E/M(B) | DS-3E0310P-E/M | DS-3E0318P-E/M(B) | DS-3E0326P-E/M(B) | |
|------------------|---|---|--|---|---|---|---|
| Image |  |  |  |  |  |  | |
| Interface | Ethernet Port | 4 x 100M PoE ports, 1 x 100M Ethernet port. | 4 x 10/100Mbps PoE ports | 8 x 100 Mbps PoE ports, 1 x 100 Mbps Ethernet port | 8 x 10/100Mbps PoE ports | 16 x 100 Mbps PoE ports, 1 x 1000 Mbps RJ45 port | 24 x 100 Mbps PoE ports, 1 x 1000 Mbps RJ45 port |
| | Uplink Port | 1 x 100M RJ45 uplink port | 2 x 10/100Mbps RJ45 ports | 1 x 100M RJ45 uplink port | 2 x Gigabit RJ45 ports | 1 x 1000M RJ45 uplink port and 1 x 1000 Mbps SFP fiber optical port | 1 x 1000M RJ45 uplink port and 1 x 1000 Mbps SFP fiber optical port |
| | High Priority Port (default) | Port 1 to 2 | Port 1 to 2 | Port 1 to 2 | - | Port 1 to 8 | Port 1 to 8 |
| | PoE Standards | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at |
| | PoE Ports | Ports 1 to 4 | Ports 1 to 4 | Ports 1 to 8 | Ports 1 to 8 | Ports 1 to 16 | Ports 1 to 24 |
| | PoE Budget | 35 W | 35W | 60 W | 60 W | 130 W | 230 W |
| | Hi-PoE | - | - | - | - | - | - |
| | PoE Extend Mode | Max. 300 m | Max. 300 m | Max. 300 m | Max. 300 m | Max. 300 m | Max. 300 m |
| | Lightning Protection | 6 KV | 6KV | 6 KV | 6KV | 6 KV | 6 KV |
| Dialing function | Long range | Ports 1 and 4: up to 250 m | Ports 1 and 4: up to 300 m | Ports 1 and 8: up to 250 m | Ports 1 and 8: up to 300 m | Ports 9 and 16: up to 250 m | Ports 17 and 24: up to 250 m |
| | Port isolation | - | - | - | - | - | - |
| | PoE watchdog | - | - | - | - | - | - |
| Performance | Packet Forwarding Rate | 0.744 Mpps | 0.8928 Mpps | 1.339 Mpps | 4.1664 Mpps | 5.356 Mpps | 6.547 Mpps |
| | Switching Capacity | 1 Gbps | 1.6 Gbps | 1.8 Gbps | 5.6 Gbps | 7.2 Gbps | 8.8 Gbps |
| | MAC Address Table | 1 K | 4K | 2 K | 16 K | 4 K | 4 K |
| General | Power Supply | 48 VDC, Max. 0.8 A | 48V 0.8A | 48 VDC, Max. 1.35 A | 48 VDC, 1.35 A | 100 to 240 VAC, 50/60 Hz, Max. 2.5 A | 100 to 240 VAC, 50/60 Hz, Max. 4 A |
| | Power Consumption | 38 W | 38W | 65 W | 65W | 150 W | 250 W |
| | Dimension | 105 mm x 27.6 mm x 83.1 mm | 145 mm x 68.45 mm x 25.6 mm | 170 mm x 27.6 mm x 93.1 mm | 217.6 mm x 103.35 mm x 27.8 mm | 266 mm x 44.5 mm x 220.8 mm | 335 mm x 44.5 mm x 226 mm |

Unmanaged 1000M PoE Series

| Model | DS-3E0505P-E | DS-3E0510P-E | DS-3E0518P-E | DS-3E0526P-E | |
|------------------|---|--|---|---|--|
| Image |  |  |  |  | |
| | | | | | |
| Interface | Ethernet Port | 4 × Gigabit PoE ports, and 1 × Gigabit RJ45 port | 8 × Gigabit PoE ports, 1 × Gigabit RJ45 port | 16 × Gigabit PoE ports, 1 × Gigabit RJ45 port | 24 × Gigabit PoE ports, 1 × Gigabit RJ45 port |
| | Uplink Port | 1 × Gigabit RJ45 port | 1 × Gigabit RJ45 port and 1 × Gigabit SFP fiber optical port | 1 × Gigabit RJ45 port and 1 × Gigabit SFP fiber optical port | 1 × Gigabit RJ45 port and 1 × Gigabit SFP fiber optical port |
| | High Priority Port (default) | - | - | - | - |
| | PoE Standards | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at | IEEE 802.3af, IEEE 802.3at |
| | PoE Ports | Ports 1 to 4 | Ports 1 to 8 | Ports 1 to 16 | Ports 1 to 24 |
| | PoE Budget | 60 W | 110 W | 230 W | 370 W |
| | Hi-PoE | - | - | - | - |
| | PoE Extend Mode | 6 KV | 6 KV | 6 KV | 6 KV |
| Dialing function | Lightning Protection | - | - | - | - |
| | Long range | - | - | - | - |
| | Port isolation | - | - | - | - |
| | PoE watchdog | - | - | - | - |
| Performance | Packet Forwarding Rate | 7.44 Mpps | 14.88 Mpps | 26.784 Mpps | 38.688 Mpps |
| | Switching Capacity | 10 Gbps | 20 Gbps | 36 Gbps | 52 Gbps |
| | MAC Address Table | 2 K | 4 K | 8 K | 8 K |
| General | Power Supply | 48 VDC, 1.35 A | 48 VDC, 2.5 A | 100 to 240 VAC, 50/60 Hz, Max. 4 A | 100 to 240 VAC, 50/60 Hz, Max. 6.5 A |
| | Power Consumption | 65 W | 120W | 250 W | 400 W |
| | Dimension | 105 mm × 27.6 mm × 83.1 mm | 217.6 mm × 27.8 mm × 108.55 mm | 440 mm × 44 mm × 220.8 mm | 440 mm × 44 mm × 220.8 mm |

Unmanaged Desktop Series

| Model | DS-3E0105D-E | DS-3E0108D-E | DS-3E0505D-E | DS-3E0508D-E | |
|-------------|--|--|--|--|---------------------------------|
| Image |  NEW |  NEW |  NEW |  NEW | |
| | | | | | |
| Interface | Ethernet Port | 5 × 10/100 Mbps RJ45 ports | 8 × 10/100 Mbps RJ45 ports | 5 × 10/100/1000 Mbps RJ45 ports | 8 × 10/100/1000 Mbps RJ45 ports |
| | Uplink Port | - | - | - | - |
| | Lightning Protection | - | - | - | - |
| Performance | Packet Forwarding Rate | 0.744 Mpps | 1.1904 Mpps | 7.44 Mpps | 11.904 Mpps |
| | Switching Capacity | 1 Gbps | 1.6 Gbps | 10 Gbps | 16 Gbps |
| | MAC Address Table | 1 K | 1 K | 2 K | 4 K |
| General | Power Supply | 5 VDC, 0.6 A | 5 VDC, 0.6 A | 5 VDC, 0.6 A | 9 VDC, 0.6 A |
| | Power Consumption | - | - | - | - |
| | Dimension | 82 mm × 52 mm × 22.4 mm | 124 mm × 59 mm × 23.2 mm | 92.8 mm × 65.8 mm × 22.8 mm | 142 mm × 90 mm × 23 mm |

Cables

166 Coaxial Cables


167 Network Cables



Cables

Coaxial Cables

- > Excellent transmission performance for analog signal
- > Oxygen-free copper conductor
- > High braiding density with aluminum foil
- > VW-1 Rating(Part of UL) flame resistance
- > High anti-interference ability
- > Full diameter and full length

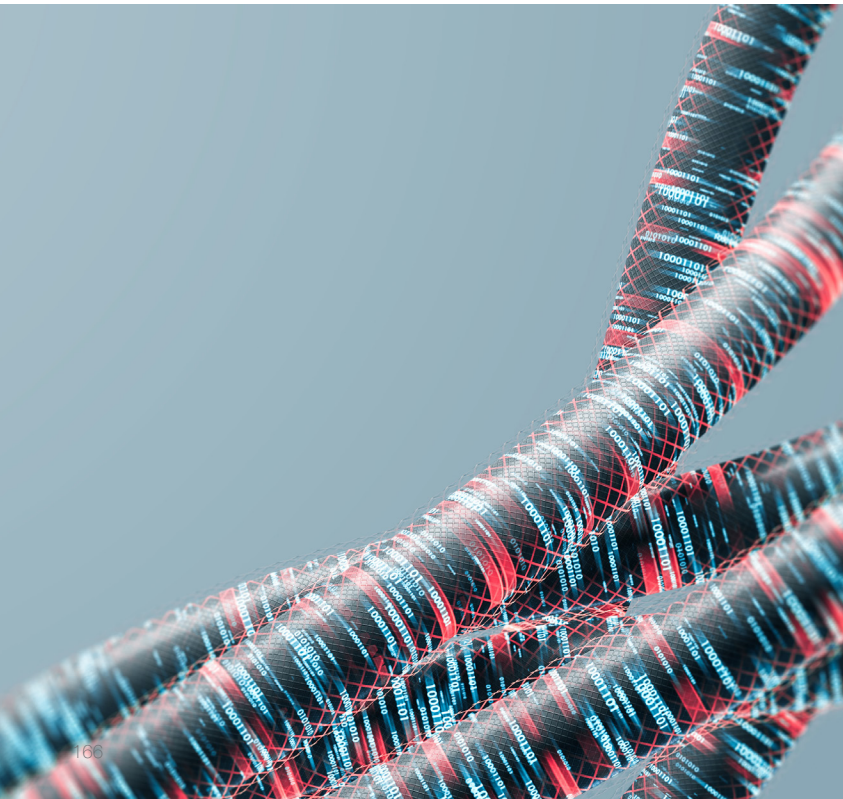



| Model | | DS-1LC1SCA2C-200B | DS-1LC1SCA-200B |
|-----------------------|-------------------|---|---|
| Image | |  |  |
| Conductor | Material | Solid Copper | Solid Copper |
| | Wire Gauge | 20AWG | 20AWG |
| | Diameter | 0.81 ± 0.01 mm | 0.81 ± 0.01 mm |
| Insulation | Material | FPE | FPE |
| | Diameter | 3.66 ± 0.05 mm | 3.66 ± 0.05 mm |
| Tape | Material | Shielding Aluminum Foil, 15 mm width | Shielding Aluminum Foil, 15 mm width |
| | Thickness | 0.04 mm | 0.04 mm |
| Braid | Material | CCA(Copper-clad Aluminum) | CCA(Copper-clad Aluminum) |
| | Braiding Standard | 8*16*0.12 mm | 8*16*0.12 mm |
| | Braiding Density | 95±1% | 95±1% |
| Jacket | Material | PVC | PVC |
| | Average Thickness | ≥ 0.65 mm | ≥ 0.65 mm |
| | Diameter | 6.10 ± 0.2 mm | 6.10 ± 0.2 mm |
| Impedance | | 75 ohms | 75 ohms |
| General | | | |
| Length | | 200 m | 200 m |
| Color | | Black | Black |
| Operating Temperature | | -40 to 80°C | -40 to 80°C |
| Storage Temperature | | -20 to 70°C | -20 to 70°C |
| Power Cable | | | |
| Conductor | Material | Solid copper | - |
| | Quantity | 2 | - |
| | Diameter | 7 * 0.385 ± 0.01 mm | - |
| Insulation | Material | PE (Flame Retardant) | - |
| | Diameter | 1.8 ± 0.1 mm | - |
| Jacket | Material | PVC | - |
| | Average Thickness | ≥ 0.3 mm | - |






Cables

Network Cables

- > 99.95% Cu purity ensures higher conductivity with lower signal transmission attenuation
- > 0.565 mm wire diameter provides more stable transmission with reduced resistance
- > Flame-retardant sheathing resists fire, stretching, and aging
- > Precise twisting technology improves transmission fluidity



| Model | | DS-1LN5E-S | DS-1LN6-UU |
|----------------------------|---------------|---|---|
| Image | |  |  |
| Test Standard | | ISO/IEC11801,TIA-568-C.2, YD/T1019 | ISO/IEC11801,TIA-568-C.2, YD/T1019 |
| Conductor | Material | Solid-Bare Copper | SOLID-Bare Copper |
| | Nom.O.D. | 0.500 ± 0.005 mm | 0.565 ± 0.005 mm |
| Insulation | Material | HDPE | HDPE |
| | Diameter | 0.88 ± 0.03 mm | 1.02 ± 0.03 mm |
| Sheath | Thickness | 0.50 ± 0.05 mm | 0.55 ± 0.05 mm |
| | External O.D. | 5.0 ± 0.4 mm | 6.2 ± 0.4 mm |
| | Surface | Clean,Frap,Satiation | Clean,Frap,Satiation |
| | Material | PVC,CM | PVC,CM |
| | Color | Multiple | Multiple |
| Core Color | | 1 White- Blue /Blue 2 White-Orange /Orange 3 White- Green /Green 4 White- Brown /Brown | 1 White- Blue /Blue 2 White-Orange /Orange 3 White- Green /Green 4 White- Brown /Brown |
| Packing | | Wooden Tray & Carton | Wooden Tray & Carton |
| Carton Dimension | | Per request | Per request |
| Packing Length | | (305 ± 1.5) m | (305 ± 1.5) m |
| Rip-cord | | Yes | Yes |
| Sheath Physical Properties | | Before Aging Tensile Strength (Mpa) ≥13.5 Elongation(%) ≥150 | Before Aging Tensile Strength (Mpa) ≥13.5 Elongation(%) ≥150 |
| | | Aging Period(°C×hrs) 100°C×24h×10d | Aging Period(°C×hrs) 100°C×24h×10d |
| | | After Aging Tensile Strength(Mpa) ≥12.5 Elongation(%) ≥125 | After Aging Tensile Strength(Mpa) ≥12.5 Elongation(%) ≥125 |
| | | Cold bend(-20±2°C×4h) 8×Cable O.D.,No visible cracks | Cold bend(-20±2°C×4h) 8×Cable O.D.,No visible cracks |
| Electrical Characteristics | | 1.0-100.0 MHz Impedance(Ω) 100±15 | 1.0-250.0MHz Impedance (Ω) 100±15 |
| | | 1.0-100.0 MHz Delay Shew (ns/100m) ≤45 | 1.0-250.0 MHz Delay Skew (ns/100m) ≤45 |
| | | DC Resistance(Ω/100m) max 9.5 | DC Resistance (Ω/100m) max 9.38 |
| | | DC Conductor Resistance Unbalance(%) max 5.0 | DC Conductor Resistance Unbalance (%) max 5.0 |
| Ambient temperature | | -20°C to 75°C | 20°C to 75°C |

| Model | DS-1LN5E-E/E | DS-1LN6-UE-W | DS-1LN5E0-UU/E | DS-1LN5EU-SCO | DS-1LN6U-SCO | |
|----------------------------|---|---|---|---|---|----------------------|
| Image |  |  |  |  |  | |
| Test Standard | ISO/IEC11801, TIA-568-C.2, YD/T1019 | ISO/IEC11801, TIA-568-C.2, YD/T1019 | ANSI/TIA-568-C.2 | ISO/IEC11801, ANSI/TIA-568-C.2, RoHS 2.0 | ISO/IEC11801, ANSI/TIA-568-C.2, RoHS 2.0 | |
| Conductor | Material | SOLID-Bare Copper | SOLID-Bare Copper | Solid-Bare Copper | Solid-Bare Copper | |
| | Nom.O.D. | 0.450 ± 0.005 mm | 0.530 ± 0.005 mm | 0.500 ± 0.01 mm | 0.500 ± 0.005 mm | 0.55 ± 0.005 mm |
| Insulation | Material | HDPE | HDPE | HDPE | HDPE | HDPE |
| | Diameter | 0.82 ± 0.03 mm | 0.95 ± 0.03 mm | 0.88±0.03mm | 0.88 ± 0.04 mm | 0.98 ± 0.05 mm |
| Sheath | Thickness | 0.50 ± 0.05 mm | 0.55 ± 0.05 mm | 0.55±0.03 mm | 0.50 ± 0.05 mm | 0.50 ± 0.10 mm |
| | External O.D. | 4.7 ± 0.4 mm | 5.8 ± 0.4 mm | 5.0±0.3 mm | 5.00 ± 0.4 mm | 6.00 ± 0.30 mm |
| | Surface | Clean,Frap,Satiation | Clean,Frap,Satiation | Clean,Frap,Satiation | Clean,Frap,Satiation | Clean,Frap,Satiation |
| | Material | PVC,CM | PVC,CM | PE | PVC | PVC |
| | Color | Grey ZLC1003 | White | Black | Gray | Orange |
| Core Color | 1 White- Blue /Blue 2 White-Orange /Orange 3 White- Green /Green 4 White- Brown /Brown | 1 White- Blue /Blue 2 White-Orange /Orange 3 White- Green /Green 4 White- Brown /Brown | 1 White- Blue /Blue 2 White-Orange /Orange 3 White- Green /Green 4 White- Brown /Brown | 1 White- Blue /Blue 2 White-Orange /Orange 3 White- Green /Green 4 White- Brown /Brown | 1 White- Blue /Blue 2 White-Orange /Orange 3 White- Green /Green 4 White- Brown /Brown | |
| Packing | Wooden Tray & Carton | Wooden Tray & Carton | Wooden Tray & Carton | Wooden Tray & Carton | Wooden Tray & Carton | |
| Carton Dimension | Per request | Per request | Per request | Per request | Per request | |
| Packing Length | (305 ± 1.5) m | (305 ± 1.5) m | (305±0.5)m | (305 ± 1.5) m | (305 ± 1.5) m | |
| Rip-cord | Yes | Yes | Yes | Yes | Yes | |
| Sheath Physical Properties | Before Aging Tensile Strength (Mpa) ≥13.5 Elongation(%) ≥150 | Before Aging Tensile Strength (Mpa) ≥13.5 Elongation(%) ≥150 | Before Aging Tensile Strength (Mpa) ≥ 10 Elongation(%) ≥300 | Before aging Tensile strength (Mpa)≥ 13.5 Elongation (%)≥ 150 | Before aging Tensile strength (Mpa)≥ 13.5 Elongation (%)≥ 150 | |
| | Aging Period(°C×hrs) 100°C×24h×10d | Aging Period(°C×hrs) 100°C×24h×10d | Aging Period(°C×hrs) 100°C×24h×10d | Aging Period(°C×hrs) 100°C×24h×10d | Aging Period(°C×hrs) 100°C×24h×10d | |
| | After Aging Tensile Strength(Mpa) ≥12.5 Elongation(%) ≥125 | After Aging Tensile Strength(Mpa) ≥12.5 Elongation(%) ≥125 | After Aging Tensile Strength(Mpa) ≥12.5 Elongation(%) ≥125 | After aging Tensile Strength(Mpa) ≥12.5 Elongation(%) ≥125 | After aging Tensile Strength(Mpa) ≥12.5 Elongation(%) ≥125" | |
| | Cold bend(-20±2°C×4h) 8×Cable O.D., No visible cracks | Cold bend(-20±2°C×4h) 8×Cable O.D., No visible cracks | Cold bend(-20±2°C×4h) 8×Cable O.D., No visible cracks | Cold bend(-20±2°C×4h) 8×Cable O.D., No visible cracks | Cold bend(-20±2°C×4h) 8×Cable O.D., No visible cracks | |
| Electrical Characteristics | 1.0-100.0 MHz Impedance(Ω) 100±15 | 1.0-250.0 MHz Impedance (Ω) 100±15 | 1.0-100.0 MHz Impedance(Ω) 100±15 | 1.0-250.0 MHz Impedance ((Ω) 100±15 | 1.0-250.0 MHz Impedance ((Ω) 100±15" | |
| | 1.0-100.0 MHz Delay Shew (ns/100m) ≤45 | 1.0-250.0 MHz Delay Skew (ns/100m) ≤45 | 1.0-100.0MHz Delay Skew (ns/100m) 552 | 1.0-100.0 MHz Delay Shew (ns/100m) ≤45 | "1.0-100.0 MHz Delay Shew (ns/100m) ≤45" | |
| | DC Resistance(Ω/100m) max 14.8 | DC Resistance (Ω/100m) max 9.38 | DC Resistance(Ω/100m) max 9.5 | DC Resistance(Ω/100m) max 9.5 | DC Resistance(Ω/100m) max 9.38" | |
| | DC Conductor Resistance Unbalance(%) max 5.0 | DC Conductor Resistance Unbalance (%) max 5.0 | DC Conductor Resistance Unbalance (%) max 2.0 | DC Conductor Resistance Unbalance(%) max 5.0 | DC Conductor Resistance Unbalance(%) max 5.0 | |
| Ambient temperature | -20°C to 70°C | -20°C to 75°C | -20°C to 60°C | -20°C to 75°C | -20°C to 75°C | |

Controller & Transmission

170 Keyboards

172 Wireless Bridges




Controller & Transmission

Keyboards

Control at Your Fingertips

- › Connection via network, RS485, or USB port
- › PTZ control via joystick
- › Access to Hikvision products, including DVRs, NVRs, IP cameras, Decoders, etc.



| Model | | DS-1006KI | DS-1005KI | DS-1200KI | DS-1100KI(B) | DS-1600KI(B) |
|------------|-----------------------|---|---|---|--|--|
| Image | |  |  |  |  NEW |  NEW |
| System | Operating System | - | - | - | - | Android |
| | Compatible System | - | Window XP/7/8/8.1 | - | - | - |
| | LCD screen | 128 x 64 pixel screen | - | 128 x 64 pixel screen | 7" TFT LCD monitor with touch panel, Resolution: 1024 x 600 | 1280x800 |
| | Joystick | 4-axis joystick | 3-axis control, rotating zoom | 4-axis joystick | 4-axis joystick | 4-axis joystick |
| | Control Mode | RS-232, RS-422, RS-485 | - | Network, RS-232, RS-422, RS-485 | IP-based | IP-based |
| | Local Decoding | - | - | - | - | Local live view at 1080P/720P/HD1/BCIF/CIF/QCIF resolution, and up to 16-division window display |
| Interfaces | Audio Input | - | - | - | 1-ch, 3.5 mm connector (2.0 Vp-p, 1 kΩ) | 1-ch, 3.5 mm connector (2.0Vp-p, >1kΩ) |
| | Audio Output | - | - | - | 1-ch, 3.5 mm connector (Linear, 560 Ω) | 1-ch, 3.5 mm connector (2.0 Vp-p, 600 Ω) |
| | Network Interface | - | - | 1; 10 M/100 Mbps self-adaptive Ethernet interface | 1 10M/100M/1000M Ethernet interface | 10M/100M/1000M Adaptive Ethernet port |
| | Wi-Fi | - | - | - | - | Supported |
| | Serial Interface | 1 RS-232, 1 RS-422, 1 RS-485 | - | 1 RS-232, 1 RS-422, 1 RS-485 | 1 RS-232 interface, 1 RS-485 interface | - |
| | Video Interface | - | - | - | - | HDMI, DVI |
| | USB Interface | 1 x USB 2.0 | 1 x USB 2.0, DirectX | 1 x USB 2.0 | 1 x USB2.0 (for data storage and device upgrade) | 2 x USB 2.0 |
| General | Power Supply | 12 VDC | 5 VDC via USB | 12 VDC | 12 VDC | 12 VDC /POE |
| | Power Consumption | ≤ 4.5 W | ≤ 5W | ≤ 4.5 W | ≤ 15W | ≤15W |
| | Working Temperature | -10 to +55° C (14 to 131° F) | -10°C - 55°C (14°F - 131°F) | -10 to +55° C (14 to 131° F) | -10°C - 55°C (14°F - 131°F) | -10°C - +55°C |
| | Working Humidity | 10% to 90% | 10%-90% (Non-condensing) | 10% to 90% | 10% - 90% | 10%-90% |
| | Dimension (W x D x H) | 435 x 193 x 110 mm | 167x177.5x116mm | 435 x 193 x 110 mm | 435 x 193 x 110 mm | 404 x 180 x 163 mm |
| | Weight | ≤ 1 kg (2.2 lb) | - | ≤ 1 kg (2.2 lb) | 2 kg (4.4 lb) | 1.7 kg |

Controller & Transmission






Wireless Bridges

Slick and Stylish Communications

Wireless Bridges create cordless communication between two or more networks.

- High performance 802.11n 2x2 MIMO chip
- TDMA, intelligent rate control, Auto ACK Time-out adjust
- Unique RF and antenna design
- Web-based operation selection makes installation and setup much easier



| Model | | DS-3WF0AC-2NT | DS-3WF01C-2N | DS-3WF01C-2N/0 | DS-3WF02C-5N/0 | DS-3WF03C |
|-----------|-------------------------|---|---|---|---|---|
| Image | |  |  |  |  |  |
| Wireless | Standard | IEEE 802.11 b/g/n | IEEE802.11 b/g/n(2T2R 300Mbps) | IEEE 802.11 b/g/n | IEEE802.11 a/n | IEEE802.11 a/n (2T2R 300 Mbps) |
| | Operation Frequency | 2412-2472 MHz | 2412 to 2472 MHz | 2.4 GHz | 5180-5825 MHz | 5165 to 5825 MHz |
| | Modulation Mode | - | - | - | - | 802.11 a/n: OFDM |
| | Antenna | Internal, Gain 8 dBi, Horizontal: 60° Vertical: 30° | Internal, 6dBi, H: 65° V: 60° | Internal, Gain: 12 dBi, Horizontal: 60° Vertical: 30° | Gain: 10 dBi, H: 60°, V: 16° | Internal, Gain 15dBi, H:40° V:15° |
| | Max Output Power | 20 dBm | 27dBm | 27 dBm | 24 dBm | 27dBm |
| | Receive Sensitivity | -92±1.5 dBm@1 Mbps, -72±1.5 dBm@ MSC7 | -72dBm@65Mbps, -97dBm@1Mbps | -96±1.5 dBm@1 Mbps, -72±1.5 dBm@ MCS7 | -85 dBm@MCS0, -67 dBm@MCS7 | -74dBm@65Mbps, -96dBm@6Mbps |
| Hardware | Max Transmission Rate | 300 Mbps | 11n: 300Mbps(HT40)/130Mbps(HT20) 11g: 54Mbps | 150 Mbps | 300 Mbps | 11n: 300Mbps(HT40)/130Mbps(HT20) 11a: 54Mbps |
| | Power Supply | 12 V/1 A passive PoE or 12 V/1 A DC | 48V/0.25A PoE or 12 VDC | 12 V/1 A Passive PoE | 24 V/0.5 A Passive PoE | 24V/0.5A PoE |
| | Interface | 10/100 M Base-TX × 1 | 3×10/100M Base-TX (Cat. 5/5E, RJ45) ports | 10/100 Mbps Base-TX × 2 | 10/100 Mbps Base-TX × 2 | PoE×1+LAN×1 |
| | Operation Temperature | -30°C - 55°C (-22°F -131°F) | -30°C to +65°C(-22° F to +149° F) | -30°C - 60°C (-22°F -140°F) | -30°C -75°C (-22°F -167°F) | -30°C to +75°C (-22° F to +167° F) |
| | Storage Temperature | -30°C - 55°C (-22°F -131°F) | -40°C to +85°C(-40° F to +185° F) | -30°C - 70°C (-22°F -158°F) | -40°C -85°C (-40°F -185°F) | -40°C to +85°C (-40° F to +185° F) |
| | Operation Humidity | 10% - 90% RH (non-condensing) | 5% to 95%RH non-condensing | 10% - 90% RH (non-condensing) | 5% -95%RH non-condensing | 5% to 95%RH non-condensing |
| | Dimensions | 193.5 mm × 80 mm × 67.5 mm | 150 mm × 150 mm × 31.6 mm (5.9 × 5.9 × 1.24 inch) | 270 mm × 94.86 mm × 67.5 mm | 200 mm × 98.8 mm × 45.5 mm (7.9 × 3.9 × 1.8 in) | 270 mm × 40 mm × 88 mm (10.6 × 1.57 × 3.46 inch) |
| | Encryption | WPA-PSK/WPA2-PSK | WPA-PSK/WPA2-PSK | WPA-PSK/WPA2-PSK | WPA-PSK/WPA2-PSK | 802.1x/WPA-PSK/WPA2-PSK |
| | Network Mode | - | Router/Bridge | - | - | Router/Bridge |
| | Operation Mode | - | - | - | - | Access Point, Station, WDS Access Point, WDS Station |
| | Security | IP/MAC filter, SSID hidden | IP/MAC filter, SSID hidden, Interface Isolation | IP/MAC filter, SSID hidden | IP/MAC filter, SSID hidden | IP/MAC filter, SSID hidden |
| | Network Protocol | TCP/UDP/ARP/ICMP/HTTP/NTP | TCP/UDP/ARP/ICMP/DHCP/HTTP/NTP | TCP/UDP/ARP/ICMP/HTTP/NTP | TCP/UDP/ARP/ICMP/HTTP/NTP | TCP/UDP/ARP/ICMP/DHCP/HTTP/NTP |
| | TDMA | - | Support (Extend private communication protocol) | Support (Extend private communication protocol) | - | Support (Avoid 802.11 hiddennode problems, and improve point-to-multi-point performance) |
| | Auto ACK Timing Adjust | - | Support | - | - | Support |
| | Management and Logs | NTP, Syslog, SNMP | NTP, Syslog, Telnet, AC | NTP, Syslog, SNMP | NTP, Syslog, SNMP | NTP, Syslog, Telnet, AC |
| | Web Based Configuration | Support | Support | Support | Support | Support |
| | Firmware Update | Support update firmware by Web page | Support update firmware by Web page | Support update firmware by Web page | Support update firmware by Web page | Support update firmware by Web page |
| Bandwidth | 20 M/40 MHz | 20M/40MHz | 20 M/40 MHz | 20 M/40 MHz | 5M/10M/20M/40MHz | |

Software

175 Hik-ProConnect



Boost managed security service
with peace-of-mind.



Hik-ProConnect
(for Installer)
Scan and download
the **app**



Visit Hik-ProConnect website
portal via below URL :
www.hik-proconnect.com




Hik-Connect
(for End User)
Scan and download
the **app**

Hik-ProConnect

Hik-ProConnect, a convergent, cloud-based security solution abounding with permanent free and pay-for functions for flexible subscription on demand, can help manage services for your customers and expand your business by subscription offers. As a security business tool, it can enable remote maintenance, proactive status monitoring, and services to enhance your efficiency, address your customer needs with converged physical security devices, and expand your business by creating subscription plans for recurring revenue.

- > The converged platform enables various Hikvision devices to converge and work together as one system.
- > Installation time is reduced through functions like adding and configuring devices in batches, saving configuration templates on the cloud, online permission applications, P2P technology, and more.
- > The system supports remote system management and health monitoring of all authorized devices, providing real-time notifications and remote device configurations using P2P technology.
- > Hik-ProConnect allows flexible linkage across various devices including cameras, recorders, security control panels, access control and video intercom devices, and doorbells.
- > Employee and permission management is supported to improve management efficiency within your organization. The admin account can create sub-accounts to manage multiple sites at once, improving workflow and internal management.
- > Customer authorization for site management protects customers' privacy and meets GDPR requirements.
- > More solutions like cloud storage, cloud network management, cloud temperature screening and flow control, as well as ARC integration are available.
- > Hik-ProConnect employs industry-leading standards and protocols for maximum security and reliability to guarantee system security.

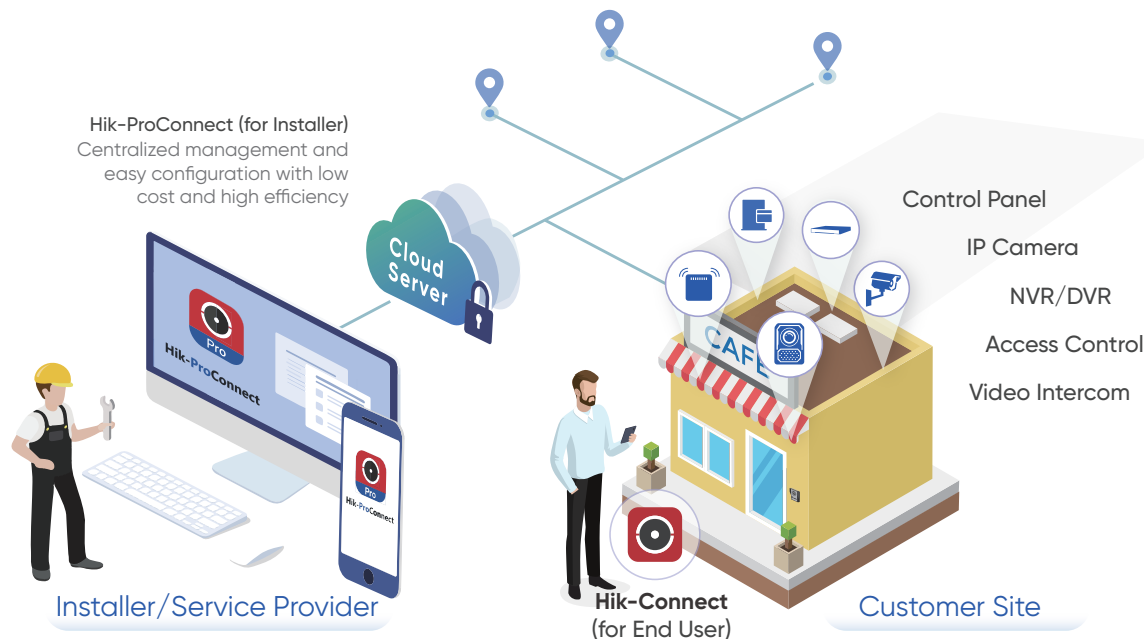

| Key Features | |
|---|--|
| Site Management | Adding new site or existing site. |
| | Inviting end user as Site Owner by email or short message to hand over the site. |
| | The Installer can apply for site authorization from Site Owner for maintaining or managing the site. |
| | The Installer can disable Hik-Connect service for the device(s) if Allow Me to Disable Hik-Connect Service function is enabled when inviting Site Owner. |
| Device Management | Adding device(s) by SADP, Hik-Connect (P2P) service, IP address or domain name, or pre-defined template. |
| | Upgrading one or more devices remotely. |
| | Configuring DDNS for the encoding devices with invalid or old firmware versions added by Hik-Connect (P2P), to make sure they can be managed by Hik-ProConnect properly. |
| | Supporting unbinding detected online device from its current account before adding it to your account. |
| | Supporting resetting password for the authorized device (AX Pro security control panel excepted) in the same LAN with the PC where your Hik-ProConnect Portal runs. |
| | Migrating the devices from Hik-Connect account to Hik-ProConnect, including the devices added in the Hik-Connect account and the ones shared from others. |
| | Supporting device live view and playback. |
| | Supporting entering the remote configuration page of the device and setting the device's parameters. |
| | *Configuring people counting parameters via Hik-ProConnect Portal and viewing people counting data on Hik-Connect Mobile Client. |
| | *Configuring temperature screening parameters via Hik-ProConnect Portal and viewing temperature screening data on Hik-Connect Mobile Client. |
| Supporting managing and maintaining AX Pro security control panel, including device settings, remote maintenance, user management, health check, etc. | |
| Cross Device Linkage | Configuring linkage rule for the devices in a site. |
| | Providing six pre-defined templates designed for typical applications. |
| | Two linkage modes, including LAN and Cloud P2P. |
| Health Monitoring | Showing device list of each site and status information. |
| | Automatically inspecting and manually inspecting the health status of the devices. |
| | Showing status of encoding devices, security control panel, access control device, video intercom device, doorbell, Hik-ProConnect box, and network switch. |
| | Supporting viewing network topology for the switch(es) and connected devices, including network links between devices, and link exceptions and abnormal devices. |
| Exceptions | Configuring exception rules to monitor the status of managed resources in real-time. |
| | When the resource is exceptional, the resource will push a notification to the Hik-ProConnect. |
| | Viewing exception records of the resources and exporting the exception records. |
| *Cloud Storage Service | Purchasing cloud storage service package. |
| | Activating cloud storage service for Hik-ProConnect box or cloud storage DVR to upload event-related video footage from linked channels of the cloud storage devices to the cloud. |
| | Activating or renewing cloud storage service for a channel. |

| Key Features | | |
|------------------------------------|--|--|
| *Access & Attendance | Person Management | Support personnel adding, modifying, deleting and querying. |
| | | Support sub administrators. |
| | | Support Person group. |
| | | Support upload face photos via mobile phone. |
| | Access control | Unlimited personnel management. |
| | | Access control device management. |
| | | Access group configuration. |
| | Time and attendance | Remote door opening permission issuance. |
| | | Time table configuration. |
| | | Shift schedule configuration. |
| Employee self-service (APP) | Assign shift schedule to person. | |
| | View and report attendance records. | |
| | Personnel self-help take pictures and input faces through mobile phones. | |
| | Support to view himself/herself attendance results. | |
| Security | Employee self-service (APP) | Support remote opening door and live view the camera. |
| | | Supporting channel encryption: HTTPS and TLS/SSL used to ensure the security of the transmission process. |
| | | Supporting signal encryption: AES 128 and RSA used to ensure the security of data content. |
| | | Protection against account attacks. |
| | | Supporting verification code encryption to ensure the security of streaming during remote live view and downloading. |
| | | Supporting Cloud P2P to establish secure link without port mapping and avoid exposing ports to the public network. |
| | | Unique serial number bound by one account to prevent the device from being added by an attacker. |
| | | Offering co-branding function to display company logo on the Hik-Connect Mobile Client for brand promotion. |
| | | Account authentication: entering authentication code, or submitting online application. (Different countries or regions may vary.) |
| | | Searching operation logs in the recent 90 days. |
| Others | Employee self-service (APP) | * Supporting purchasing health monitoring package and setting the devices that can access the service. |

Note: The features marked with * may be not released in certain countries or regions. Please refer to the actual interfaces

| Specifications | |
|---|---|
| The following table shows the maximum performance of the Hik-ProConnect Portal. | |
| Supported Languages | English, Arabic, Brazilian Portuguese, Bulgarian, Croatian, Czech, Danish, Dutch, Estonian, Farsi, Finnish, French, German, Greek, Hebrew, Hungarian, Indonesian, Italian, Japanese, Kazakh, Korean, Latvian, Lithuanian, Norwegian, Polish, Portuguese, Romanian, Russian, Serbian, Slovakian, Slovenian, Spanish, Swedish, Thai, Traditional Chinese, Turkish, Ukrainian, Uzbek, and Vietnamese |
| Number of Employees | Unlimited |
| Number of Sites | Unlimited |
| Number of Devices | Unlimited |
| Notification Retention Period | Up to 7 days |
| Log Retention Period | Up to 90 days |

Accessories

178 Brackets and Housings

222 Power Adapters

224 Camera Testers










225 Pickups



































Accessories









Brackets and Housings






















| Appearance | Model | Recommended brackets for Hikvision analog camera | | | | | |
|---|---------------------------------|---|---|---|---|---|---|
| | | Relevant brackets and housings | | | | | |
| | | Indoor | | Indoor housing | | Outdoor housing | |
|  | DS-2CC12D9T-A) DS-2CC12D9T-E |  |  |  |  |  |  |
|  | DS-2CE37U8T-A | DS-1299ZJ Pendant mount | DS-1280ZJ-XS Junction box | DS-1292ZJ Wall mount | DS-1332HZ Indoor housing | DS-1330HZ Indoor housing | DS-1331HZ Series Outdoor housing |
|  | DS-2CC12D8T-AMM | Hik white Aluminum Alloy 77×77×198mm 165g | Hik white Aluminum Alloy Φ100 x 43.2 x 129mm 320g (Match up with DS-1299ZJ) | Hik white Aluminum alloy 70×97.1×217.9mm 201g | Hik white Aluminum alloy 288×149×100mm 800g | Hik white Complex fiber 290×142×92mm 640g | Hik white Aluminum alloy |











| Appearance | Model | Recommended brackets for Hikvision analog camera | | | |
|---|------------------------------------|---|--|--|--|
| | | Relevant brackets and housings--- Indoor/Outdoor | | | |
| | | Indoor | | Outdoor | |
|  | DS-2CE15A2P(N)-VFIR3 |  |  |  |  |
|  | DS-2CC12A2P-IT5 DS-2CE16C2T-IT5 | DS-1275ZJ-SUS | DS-1280ZJ-S | DS-1260ZJ | DS-1276ZJ-SUS |
|  | DS-2CC12A7-AJVFIT3 | Hik white Stainless steel 127×46×250mm Diameter of clamp: Φ67-127mm 1480g | Hik white Aluminum alloy Φ137 x 53.4x 164.8mm 527g | Hik White Aluminum alloy Φ88.5 mm 251g | Hik white Stainless steel 126×105×250mm 2280g |
|  | DS-2CE16D9T-AIRAZH | | | | |



















| Appearance | Model | Appearance | Model | Appearance | Model | Appearance | Model | Recommended brackets for Hikvision analog camera |
|---|--|---|--|---|--|---|---|---|
| | | | | | | | | Relevant brackets and housings--- Indoor/Outdoor |
|  | DS-2CE16COT-IR(F) DS-2CE16C2T-IR DS-2CE16D0T-IR(F)/(E) DS-2CE16D0T-13F DS-2CE16D3T-13F DS-2CE16D0T-12FD DS-2CE16D0T-12FB |  | DS-2CE16D0T-IT(F)(P)(S) |  | DS-2CE10HFT-F |  | DS-2CE16HOT-IT1/3/5F(C) |  |
|  | DS-2CE16COT-IRP(F) DS-2CE16C2T-IRP DS-2CE16D0T-IRP(F)/(E) DS-2CE16D0T-IR(F)(C) DS-2CE16D0T-IRP(F)(C) DS-2CE16D3T-13PF DS-2CE16D0T-12PFD DS-2CE16D0T-12PFB |  | DS-2CE16D8T-IT(P)(F)/(E) DS-2CE16H5T-IT(P)(E) DS-2CE16H0T-IT(P)(F) |  | DS-2CE12D8T-PIRL(O) DS-2CE12H0T-PIRL(O) DS-2CE18U8T-IT3 DS-2CE12D0T-PIRL(O) |  | DS-2CE16D0T-IT1(F)/IT3(F)/IT5(F)(C) | DS-1280ZJ-XS |
|  | DS-2CE16C2T-IT1/IT3 |  | DS-2CE17U8T-IT |  | DS-2CE12DFT-F |  | DS-2CE17H0T-IT1/3/5F | |
|  | DS-2CC12D9T-IT3E/IT5E DS-2CE16C0T-IT1(F)/IT3(F)/IT5(F) DS-2CE16D0T-IT1(F)(E)/IT3(F)(E)/IT5(F)(E) DS-2CE16D8T-IT1(F)(E)/IT3(F)(E)/IT5(F)(E) DS-2CE16H5T-IT1(E)/IT3(E)/IT5(E) DS-2CE16H0T-IT1/3/5F(E) |  | DS-2CE11D8T-PIRL(P)(O) DS-2CE11H0T-PIRL(P)(O) DS-2CE11D0T-PIRL(P)(O) |  | DS-2CE12HFT-F |  | DS-2CE17D0T-IT1/3/5F DS-2CE17D0T-IT1/3/5 | Junction Box |
|  | |  | |  | DS-2CE16D0T-ITPF DS-2CE16H0T-ITPF(C) DS-2CE16D0T-EXIPF |  | DS-2CE12DFT-PIRXOF DS-2CE12D0T-PIRXOF | |
|  | |  | |  | DS-2CE16D0T-ITF DS-2CE16H0T-ITF(C) DS-2CE16D0T-EXIF | | | |










| Appearance | Model | Recommended brackets for Hikvision analog camera | | | | | | |
|---|------------------|---|--|---|---|---|---|--|
| | | Relevant brackets and housings--- Indoor/Outdoor | | | | | | |
|  | DS-2CE16C8T-IW3Z |  |  |  |  |  |  |  |
| | | DS-1293ZJ | DS-1275ZJ-SUS | DS-1269ZJ | DS-1233ZJ | DS-1232ZJ | DS-1232ZJ-T | DS-1276ZJ-SUS |
| | | Wall mount | Vertical pole mount | Pendant mount | Column mount | Cardan joint | Cardan joint | Corner mount |
| | | Hik white Aluminum alloy 88×116.6×297.3mm 473g | Hik white Stainless Steel 127×46×250mm Diameter of clamp: Ø67-127mm 1480g Match up with wall mount DS-1293ZJ-XX(B) | Hik white Aluminum alloy 493x246x88mm 480g | Hik white Steel Ø160 x 1093mm 6200g | Hik white Steel 126x103.5x83mm 790 | Hik white Steel 96x95x92.5mm | Hik white Stainless Steel 126×105×250mm 2280g Match up with wall mount DS-1293ZJ-XX(B) |













| Appearance | Model | Recommended brackets for Hikvision analog camera | | |
|---|---|---|--|--|
| | | Relevant brackets and housings--- Indoor/Outdoor | | |
|   | DS-2CC12D9T-AIT3ZE DS-2CE16D8T-(A)IT3Z(F) DS-2CE16D8T-IT3ZE DS-2CE16H0T-(A)IT3ZF DS-2CE19H8T-(A)IT3ZF DS-2CE19U1T-(A)IT3ZF DS-2CE19U7T-(A)IT3ZF DS-2CE19D3T-(A)IT3ZF |  |  |  |
| | | | | |
| | | Vertical pole mount | Junction box | Corner mount |
|    | DS-2CE16C2T-VFIR3 DS-2CE16D0T-VFIR3F/E DS-2CE19U8T-(A)IT3Z DS-2CE16C5T-AIT3Z | Hik white Stainless Steel 127×46×250mm Diameter of clamp: Ø67-127mm 1480g | Hik white Aluminum alloy Ø137 x 53.4x 164.8mm 527g | Hik white Stainless Steel 126×105×250mm 2280g |








| Appearance | Model | Recommended brackets for Hikvision analog camera | | | | |
|---|--|--|---|--|--|---|
| | | Relevant brackets and housings--- Indoor/Outdoor | | | | |
|  | DS-2CE59U7T-(A)VPIT3ZF DS-2CE59H8T-(A)VPIT3ZF DS-2CE59U1T-(A)VPIT3ZF DS-2CE56D8T-(A)VPIT3Z(F)/(E) |  |  |  |  |  |
| | | DS-1271ZJ-140 | DS-1273ZJ-140 | DS-1273ZJ-140B | DS-1241ZJ | DS-1240ZJ |
| | | Pendant Mount | Wall mount | Wall mount | In-ceiling mount | Inclined ceiling mount |
| | | Hik white Aluminum alloy Φ150×565mm 1900g | Hik white Aluminum alloy 140×183.5×232mm 703g | Hik white Aluminum alloy with junction box 140×243×292mm 1488g | Hik white Aluminum alloy Φ200×26.8mm 300g | Hik white Aluminum alloy Φ145×63mm 440g |
|  | DS-2CC52D9T-AVPIT3ZE DS-2CE56HOT-(A)VPIT3Z(F)/(E) DS-2CE59U8T-(A)VPIT3Z |  |  |  |  | |
| | | DS-1275ZJ-SUS | DS-1276ZJ-SUS | DS-1253ZJ-L | DS-1250ZJ | |
| | | Vertical pole mount | Corner mount | Rain shade | Rain shade | |
| | | Hik white Stainless Steel 127×46×250mm Diameter of clamp: Φ67-127mm 1480g Match up with wall mount[DS-1273ZJ-XX(B)] | Hik white Stainless Steel 126×105×250mm 2280g Match up with wall mount[DS-1273ZJ-XX(B)] | Hik white Composite Fiber Φ225.1×98mm 198g Match up with wall mount[DS-1273ZJ-140] | Hik white Composite Fiber 264.7*152*189.6 mm 199g | |




| Appearance | Model | Recommended brackets for Hikvision analog camera | | | |
|---|---|---|--|--|---|
| | | Relevant brackets and housings--- Indoor | | | |
|    | DS-2CE56H8T-(A)ITZF DS-2CE56U1T-(A)ITZF DS-2CE56D8T-(A)ITZF DS-2CE56D8T-ITZE |  DS-1271ZJ-130 Pendant Mount Hik white Aluminum alloy Ø150×565mm 1900g |  DS-1273ZJ-130 Wall mount Hik white Aluminum alloy 132×183.5×228.5mm 690g |  DS-1273ZJ-130B Wall mount Hik white Aluminum alloy with junction box 132×243×288.5mm 1475g |  DS-1249ZJ In-ceiling mount Hik white ABS plastic Ø169.4×14.6mm 60g |
| | | DS-2CE56D0T-VFIR(F)/ (E) |  DS-1275ZJ-SUS Vertical pole mount Hik white Stainless Steel 127×46×250mm Diameter of clamp: Ø67-127mm 1480g Match up with wall mount(DS-1273ZJ-XX(B)) |  DS-1276ZJ-SUS Corner mount Hik white Stainless Steel 126X105X250mm 2280g Match up with wall mount(DS-1273ZJ-XX(B)) |  DS-1253ZJ-L Rain shade Hik white Composite fiber Ø225.1×98mm 198g Match up with wall mount(DS-1273ZJ-130) |



| Appearance | Model | Recommended brackets for Hikvision analog camera | | | | |
|---|---------------------|--|---|--|---|--|
| | | Relevant brackets and housings--- Indoor | | | | |
|  | DS-2CE56D8T-VPIT(E) |  |  |  |  |  |
| | | DS-1259ZJ | DS-1271ZJ-110 | DS-1272ZJ-110 | DS-1272ZJ-110B | DS-1275ZJ-SUS |
| | | Inclined ceiling mount | Pendant mount | Wall mount | Wall mount | Vertical pole mount |
|  | DS-2CE57U0T-VPITF |  |  |  |  |  |
| | | DS-1276ZJ-SUS | DS-1280ZJ-DM18 | DS-1258ZJ | DS-1253ZJ-M | DS-1250ZJ |
| | | Corner mount | Junction box | Wall mount | Rain shade | Rain shade |
|  | DS-2CE56C0T-VP1R |  |  |  |  |  |
| | | DS-1276ZJ-SUS | DS-1280ZJ-DM18 | DS-1258ZJ | DS-1253ZJ-M | DS-1250ZJ |
| | | Corner mount | Junction box | Wall mount | Rain shade | Rain shade |
| | | <p>Hik white ABS Plastic Ø111×39.2mm 200g</p> | <p>DS-1258ZJ Hik white Aluminum alloy Ø150×560mm 1900g</p> | <p>Hik white Aluminum alloy 120×122×169mm 420g</p> | <p>Hik white Aluminum alloy with junction box 123×180×227.8mm 1205g</p> | <p>Hik white Stainless Steel 127×46×250mm Diameter of clamp: Ø67-127mm 1480g Match up with wall mount(DS-1272ZJ-XX(B))</p> |
| | | <p>Hik white Stainless Steel 126X105X250mm 2280g Match up with wall mount(DS-1272ZJ-XX(B))</p> | <p>Hik white Aluminum alloy Ø115.4×43.8mm 450g</p> | <p>Hik white ABS plastic 120×111×161.5mm 200g</p> | <p>Hik white Composite fiber Ø191.1×76mm 133g Match up with wall mount(DS-1272ZJ-110)</p> | <p>Hik white Composite fiber 264.7*152*189.6 mm 199g</p> |










| Appearance | Model | Recommended brackets for Hikvision analog camera | | | |
|---|---|--|--|---|---|
| | | Relevant brackets and housings--- Indoor/Outdoor | | | |
|  | DS-2CE5AU1T-[A]VPIT3ZF DS-2CE5AU7T-[A]VPIT3ZF DS-2CE5AD8T-[A]VPIT3Z(F)/(E) |  |  |  |  |
| | | DS-1273ZJ-140-DM45 | DS-1271ZJ-140-DM45 | DS-1275ZJ-SUS | DS-1276ZJ-SUS |
| | | Wall mount | Pendant mount | Vertical pole mount | Corner mount |
| | | Hik white Aluminum alloy Φ140×182×120mm | Hik white Aluminum alloy Φ140×545mm | Hik white Stainless Steel 117×143×194mm(Diameter of clamp 67-127mm) 1480g Match up with wall mount(DS-1273ZJ-XX(B)) | Hik white Stainless Steel 158X173mm Match up with wall mount (DS-1273ZJ-XX(B)) |
|  | DS-2CE5AH0T-[A]VPIT3ZF DS-2CE5AH0T-VPIT3ZE DS-2CE5AD3T-[A]VPIT3ZF DS-2CE5AH8T-[A]VPIT3ZF |  |  |  | |
| | | DS-1281ZJ-DM45 | DS-1280ZJ-DM45 | DS-1253ZJ-L | |
| | | Inclined ceiling mount | Junction box | Rain shade | |
| | | Hik white Aluminum alloy Φ140×49mm | Hik white Aluminum alloy 168×140×40mm | Hik white Composite fiber Match up with wall mount(DS-1273ZJ-140-DM4S) | |









| Appearance | Model | Recommended brackets for Hikvision analog camera | | | | | |
|---|---|--|---|--|--|---|---|
| | | Relevant brackets and housings--- Indoor/Outdoor | | | | | |
|  | DS-2CE5AD0T-VPIT3F DS-2CE5AD8T-VPIT3Z |  |  |  |  |  |  |
| | | DS-1271ZJ-135 | DS-1273ZJ-135 | DS-1473ZJ-135B | DS-1275ZJ-SUS | DS-1276ZJ-SUS | DS-1227ZJ |
| | | Pendant mount | Wall mount | Wall mount with junction box | Vertical pole mount | Corner mount | In-ceiling mount |
| | | Hik white Aluminum alloy 150×150×565mm 1900g | Hik white Aluminum alloy 136×183.5×230mm 704g | Hik white Aluminum alloy with junction box 136×243×290mm 1490g | Hik white Stainless Steel 127×46×250mm Diameter of clamp: Ø67-127mm 1480g Match up with wall mount(DS-1273ZJ-135) | Hik white Stainless Steel 126×105×250mm 2280g Match up with wall mount(DS-1273ZJ-135) | Hik white Aluminum alloy & ABS Plastic Ø210×90mm 540g |
| | |  |  |  |  |  | |
| | | DS-1280ZJ-DM21 | DS-1281ZJ-DM23 | DS-1253ZJ-L | DS-1250ZJ | DS-1258ZJ-L | |
| | | Junction box | Inclined ceiling mount | Rain shade | Rain shade | Wall mount | |
| Hik white Aluminum alloy 162×137×42mm 250g | Hik white Aluminum alloy 136.3×136.3×48mm 245g | Hik white Composite fiber Ø225.1×98mm 198g Match up with wall mount(DS-1273ZJ-135) | Hik white Composite fiber 264.7*152*189.6 mm 199g | Hik white Plastic 136×183×213mm 260g | | | |









| Appearance | Model | Recommended brackets for Hikvision analog camera | | | | | |
|---|------------------|---|---|---|---|--|--|
| | | Relevant brackets and housings--- Indoor | | | | | |
|  | DS-2CC52H1T-FITS |  |  |  |  |  |  |
| | | DS-1294ZJ | DS-1281ZJ-DM27 | DS-1297ZJ | DS-1299ZJ | DS-1297ZJ-ES | DS-1297ZJ-M |
| | | Wall mount | Inclined ceiling mount | Pendant mount (extendable) | Pendant Mount | Pendant mount (extendable) | Pendant mount (extendable) |
| | | Hik white Toughened Plastic 223.9×80×125.8mm 450g | Hik white Plastic 111.8×40.5×108.3mm 45.8g | Hik white Aluminum alloy (Height 1000-2000mm) | Hik white Aluminum Alloy 77×77×198mm 165g | Hikvision White Aluminum Alloy Φ 97 mm × 270 mm to 400 mm (Φ 3.82" × 10.63" to 15.75") 500 g (1.10 lb.) | Hikvision White Aluminum Alloy Φ 120 mm × 650 mm to 1200 mm (Φ 4.72" × 25.59" to 47.24") 800 g (1.76 lb.) |









| Appearance | Model | Recommended brackets for Hikvision analog camera | |
|---|---|--|--|
| | | Relevant brackets and housings---Indoor/Outdoor | |
|  | DS-2CE56C2T-IRM DS-2CE56C0T-IRM(F) DS-2CE56DOT-IRM(F) |  | DS-1280ZJ-TR3 |
| | | | Junction box |
|  | DS-2CE56DOT-IRM(F)(C) | | Hik white ADC12 Ø119.68 x 82.58 x 41.02mm 107g |





| Appearance | Model | Recommended brackets for Hikvision analog camera | |
|---|------------------|--|--|
| | | Relevant brackets and housings---Indoor/Outdoor | |
|  | DS-2CC52C7T-VPIR |  | DS-1274ZJ-DM28 |
| | | | Corner mount |
| | | | Hik white Aluminum alloy 233×201×96mm |
















| Appearance | Model | Recommended brackets for Hikvision analog camera | | | |
|---|--|---|--|---|---|
| | | Relevant brackets and housings--Indoor/Outdoor | | | |
|  | DS-2CE56HOT-ITPF DS-2CE76D3T-ITPF |  |  |  |  |
|  | DS-2CE76U1T-ITPF DS-2CE76U0T-ITPF DS-2CE76D0T-EXIPF | DS-1272ZJ-110-TRS | DS-1275ZJ-SUS | DS-1276ZJ-SUS | DS-1280ZJ-XS |
| | | Wall mount | Vertical pole mount | Corner mount | Junction box |
|  | DS-2CE76D0T-ITPF | | | | |
|  | DS-2CE56C0T-IR(P)(F) DS-2CE56C2T-IR(P) | Hik white Aluminum alloy 120×122×169mm 420g | Hik white Stainless Steel 127×46×250mm Diameter of clamp: Ø67-127mm 1480g Match up with wall mount[DS-1272ZJ-XX(B)] | Hik white Stainless Steel 126×105×250mm 2280g Match up with wall mount[DS-1272ZJ-XX(B)] | Hik white Aluminum Alloy Ø100 x 43.2 x 129mm 320g |
|  | DS-2CE56D0T-IR(P)(F) DS-2CE56D0T-I2(P)FD DS-2CE56D0T-I2(P)FB | | | | |

| Appearance | Model | Recommended brackets for Hikvision analog camera | | | | | | |
|---|--|---|---|---|---|--|---|---|
| | | Relevant brackets and housings--- Indoor/Outdoor | | | | | | |
|  | DS-2CS54A1P(IN)-IRS DS-2CE56D8T-IRS |  |  |  |  |  |  |  |
| | | DS-1272ZJ-120 | DS-1272ZJ-120B | DS-1271ZJ-120 | DS-1275ZJ-SUS | DS-1276ZJ-SUS | DS-1282ZJ-DM(mini) | DS-1280ZJ-DM22 |
| | | Wall mount | Wall mount | Pendant mount | Vertical pole mount | Corner mount | Gang box | Junction box |
| | | Hik white Aluminum alloy 120×122×173.5mm 430g | Hik white Aluminum alloy with junction box 123×180×223mm 1225g | Hik white Aluminum alloy Φ150×573mm 1900g | Hik white Stainless Steel 127×46×250mm Diameter of clamp: Φ67- 127mm 1480g Match up with wall mount[DS-1272ZJ-XX(B)] | Hik white Stainless Steel 126X105X250mm 2280g Match up with wall mount[DS-1272ZJ-XX(B)] | Hik white Plastic Φ120 mm | Hik white Aluminum alloy 164.8×137×53.4mm 520g |

| Appearance | Model | Recommended brackets for Hikvision analog camera | | | | | | |
|---|--|--|---|---|--|--|--|--|
| | | Relevant brackets and housings---Indoor/Outdoor | | | | | | |
|  | DS-2CE56C2T-IT1/IT3 DS-2CE56C5T-IT1/IT3 |  |  |  |  |  |  |  |
| | | DS-1272ZJ-110 | DS-1275ZJ-SUS | DS-1276ZJ-SUS | DS-1258ZJ | DS-1280ZJ-S | DS-1281ZJ-S | DS-1271ZJ-110 |
| | | Hik white Aluminum alloy 120×122×169mm 420g | Hik white Stainless Steel 127×46×250mm Diameter of clamp: Φ67- 127mm 1480g Match up with wall mount[DS-1272ZJ-XX(B)] | Hik white Stainless Steel 126X105X250mm 2280g Match up with wall mount [DS-1272ZJ-XX(B)] | Hik white ABS plastic 120×111×161.5mm 200g Suitable for indoor | Hik white Aluminum alloy 137×53.4×164.8mm 527g | Hik white Aluminum alloy 137×56.5×147mm 472g | Hik white Aluminum alloy Φ150×560mm 1900g |

| Appearance | Model | Recommended brackets for Hikvision analog camera | | | | | |
|---|---|--|--|--|--|--|---|
| | | Relevant brackets and housings---Indoor/Outdoor | | | | | |
|  | DS-2CE56C5T-VFIT3 |  DS-1273ZJ-130-TRL Wall mount |  DS-1275ZJ-SUS Vertical pole mount |  DS-1276ZJ-SUS Corner mount |  DS-1280ZJ-M Junction box |  DS-1281ZJ-M Inclined ceiling mount |  DS-1271ZJ-130-TRL Pendant mount |
| |  | DS-2CE56C2T-VFIR3 DS-2CE56D0T-VFIR3F/E | Hik white Aluminum alloy 131×183.5×228.5mm 890g | Hik white Stainless Steel 127×46×250mm Diameter of clamp: Ø67-127mm 1480g Match up with wall mount(DS-1273ZJ-XX(B)) | Hik white Stainless Steel 126×105×250mm 2280g Match up with wall mount(DS-1273ZJ-XX(B)) | Hik white Aluminum alloy 157×184.8×53.4mm 621g | Hik white Aluminum alloy 157×165.7×61.8mm 586g |




| Appearance | Model | Recommended brackets for Hikvision analog camera | |
|---|--|---|--|
| | | Relevant brackets and housings---Indoor/Outdoor | |
|  | DS-2CE56D8T-IT3Z(F)(E) |  | |
|  | DS-2CE79U7T-AIT3ZF DS-2CE79H8T-AIT3ZF | DS-1280ZJ-TR12 Junction box | |
|  | DS-2CE56H0T-IT3Z(F)(E) DS-2CE79U8T-IT3Z DS-2CE79D3T-IT3ZF DS-2CE79H8T-IT3ZF DS-2CE79U1T-IT3ZF DS-2CE79U7T-IT3ZF | Hikvision White Alloy 123.06 mm × 168.24 mm × 45 mm (4.84" × 6.62" × 1.77") 215 g (0.47 lb.) | |








| Appearance | Model | Recommended brackets for Hikvision analog camera | | |
|---|--|--|--|---|
| | | Relevant brackets and housings---Indoor/Outdoor | | |
|  | DS-2CE78D3T-IT3F DS-2CE78H8T-IT1/3F DS-2CE78U1T-IT1/3F DS-2CE78U7T-IT1/3F DS-2CE78U0T-IT3F |  |  |  |
|  | DS-2CE56C0T-IT1(F)/IT3(F) DS-2CE56D0T-IT1(F)(E)/IT3(F)(E) DS-2CE56H1T-IT1(E)/IT3(E) DS-2CC52D9T-IT3E DS-2CE56D8T-IT1(F)(E)/IT3(F)(E) DS-2CE56H5T-IT1(E)/IT3(E) DS-2CE56H0T-IT1/3(F)/(E) DS-2CE56C5T-IT3 | DS-1272ZJ-110-TRS Wall mount | DS-1275ZJ-SUS Vertical pole mount | DS-1276ZJ-SUS Corner mount |
|  | DS-2CE78D0T-IT3FS | Hik white Aluminum alloy 110×120×120mm 420g | Hik white Stainless Steel 127×46×250mm Diameter of clamp: Ø67-127mm 1480g Match up with wall mount (DS-1272ZJ-XX(B)) | Hik white Stainless Steel 126×105×250mm 2280g Match up with wall mount (DS-1272ZJ-XX(B)) |
|  | DS-2CE56D0T-IT1(F)/IT3(F)(C) | | | |
|  | DS-2CE71D8T-PIRL(O) DS-2CE71D0T-PIRL(P)(O) DS-2CE71H0T-PIRL(P)(O) |  |  |  |
|  | DS-2CE78U8T-IT3 | DS-1280ZJ-S Junction box | DS-1281ZJ-S Inclined ceiling mount | DS-1280ZJ-TR13 Junction box |
|  | DS-2CE72DFT-F | | | |
|  | DS-2CE72HFT-F | Hik white Aluminum alloy 137×53,4×164,8mm 527g | Hik white Aluminum alloy 137×56,5×147mm 472g | Hikvision White Aluminium Alloy Φ 110 mm × 144,3 mm × 48 mm (Φ 4.33" × 5.68" × 1.89") Approx. 187 g (0.41 lb.) |
|  | DS-2CE72DFT-PIRXOF | | | |





Network Camera



| Appearance | Model | Relevant brackets and housings | | | | | |
|---|--------------|---|--|---|---|---|---|
| | | Indoor | | Indoor housing | | Outdoor housing | |
|  | DS-2CD2821G0 |  |  |  |  |  |  |
| | | DS-1299ZJ | DS-1292ZJ | DS-1332HZ | DS-1330HZ | DS-1331HZ series | DS-1340HZ |
| | | Pendant Mount | Wall mount | Indoor housing | Indoor housing | Outdoor housing | Outdoor housing |
| | | Hik white Aluminum Alloy 77×77×198mm 165g | Hik white Aluminum alloy 70×97.1×217.9mm 201g | Hik white Aluminum alloy 288×149×100mm 800g | Hik white Complex fiber 290×142×92mm 640g | Hik white Aluminum alloy | Three-axis adjustment Containing combined wires and fan IK10 |




| Appearance | Model | Appearance | Model | Appearance | Model |
|---|--|--|---|---|--|
|  | DS-2CD2085FWD-I DS-2CD2055FWD-I DS-2CD2045FWD-I DS-2CD2035FWD-I DS-2CD2025F(H)WD-I DS-2CD2083G0-I DS-2CD2063G0-I DS-2CD2043G0-I DS-2CD2023G0-I |  | DS-2CD2065G1-I DS-2CD2085G1-I DS-2CD2021G1-I(D)(W) DS-2CD2021G1-I(D)(W)(B) |  | DS-2CD2026G2-I(U) DS-2CD2046G2-I(U) DS-2CD2086G2-I(U) |
|  | DS-2CV2021G2-IDW DS-2CV2041G2-IDW DS-2CV2026G0-IDW DS-2CV2046G0-IDW |  | DS-2CD1T23G0-I DS-2CD1T43G0-I |  | DS-2CD1023G0-I DS-2CD1023G0E-I DS-2CD1023G0-IU DS-2CD1043G0-I DS-2CD1053G0-I |

| Appearance | Model | Appearance | Model | Relevant brackets and housings--Indoor/Outdoor | |
|---|-------------------|--|---|---|--|
|  | DS-2CV1021G0-IDW1 |  | DS-2CD2051G1-IDW1 DS-2CD2041G1-IDW1 DS-2CD2021G1-IDW1 |  | DS-1280ZJ-XS Junction box Hik white Aluminum Alloy Ø100 x 43.2 x 129mm 320g |














| Appearance | Model | Relevant brackets and housings | | | | |
|--|-----------------------|---|--|--|---|---|
| | | Indoor/Outdoor | | | | |
|  DS-2CD162160-II(Z) DS-2CD163160-II(Z) DS-2CD162360-II(Z) DS-2CD164360-II(Z) DS-2CD162361-II(Z)(S) DS-2CD165360-II(Z) | |  |  |  |  |  |
| | | DS-1260ZJ | DS-1280ZJ-S | DS-1275ZJ-SUS | DS-1276ZJ-SUS | DS-1275ZJ-S-SUS |
| | | Junction box | Junction box | Vertical pole mount | Corner mount | Vertical pole mount |
|  | DS-2CD262160-II(Z)(S) | Hikvision White Aluminum Alloy Ø88.5 mm 251g | Hik white Aluminum alloy Ø137 x 53.4x 164.8mm 527g | Hikvision White Stainless Steel 127 mm × 46 mm × 250 mm (5" × 1.81" × 9.84") 1480 g (3.26 lb.) | Hik white Stainless Steel 126×105×250mm 2280g | Hik white Stainless Steel 144 mm × 131.6 mm × 44.3 mm (5.67" × 5.18" × 1.74") 760 g (1.68 lb.) Match up with DS-1260ZJ |













| Appearance | Model | Relevant brackets and housings | | |
|---|----------------------------------|--|---|--|
| | | Indoor/Outdoor | | |
|  | DS-2CD204761-L DS-2CD202761-L |  |  |  |
| | | 302700579 | 302701533 | 302701678 |
| | | Junction box | Vertical pole mount | Corner mount |
| | | Hik white Aluminum alloy Ø137 x 53.4x 164.8mm 527g | Hikvision White Stainless Steel 127 mm × 46 mm × 250 mm (5" × 1.81" × 9.84") 1480 g (3.26 lb.) | Hik white Stainless Steel 126×105×250mm 2280g |








| Appearance | Model | Relevant brackets and housings | | | |
|---|---|--|---|---|---|
| | | Indoor/Outdoor | | | |
|  | DS-2CD2626G2-IZS DS-2CD2646G2-IZS DS-2CD2686G2-IZS DS-2CD2685G0-IZS DS-2CD2665G0-IZS DS-2CD2685FWD-IZS DS-2CD2655FWD-IZS(B) DS-2CD2645FWD-IZS DS-2CD2635FWD-IZS DS-2CD2625FWD-IZS DS-2CD2625FHW-IZS DS-2CD2683G0-IZS DS-2CD2663G0-IZS DS-2CD2643G0-IZS DS-2CD2623G0-IZS |  |  |  |  |
| | | DS-1475ZJ-SUS | DS-1476ZJ-SUS | DS-1275ZJ-S-SUS | DS-2551ZJ |
| | | Vertical pole mount | Corner mount | Vertical pole mount | Column Mount |
|  | DS-2CD2626G2-IZSU/SL DS-2CD2646G2-IZSU/SL DS-2CD2686G2-IZSU/SL | Hik white Stainless Steel 250 mm × 127 mm × 46 mm Diameter of clamp: Ø67-127mm 1205g | Hik white Stainless Steel 126×105×250mm 2280g | Hik white Stainless Steel 144 mm × 131.6 mm × 44.3 mm (5.67" × 5.18" × 1.74") 760 g (1.68 lb.) | Hikvision White Alloy Ø 250 mm × 1570.08 mm (Ø 9.84" × 61.81") Approx. 3308 g (7.29 lb.) |







| Appearance | Model | Relevant brackets and housings |
|---|--|--|
| | | Indoor/Outdoor |
|  | DS-2CD2085FWD-I DS-2CD2055FWD-I DS-2CD2045FWD-I DS-2CD2025FWD-I DS-2CD2043G0-I DS-2CD2023G0-I |  |
| | | DS-1280ZJ-XS(Black) |
| | | Junction box |
|  | DS-2CD2065G1-I DS-2CD2085G1-I | Hik Black Aluminum Alloy Ø100 x 43.2 x 129mm 320g |







| Appearance | Model | Relevant brackets and housings |
|---|--|--|
| | | Indoor/Outdoor |
|  | DS-2CD2685G0-IZS DS-2CD2665G0-IZS DS-2CD2685FWD-IZS DS-2CD2645FWD-IZS DS-2CD2635FWD-IZS DS-2CD2625FWD-IZS |  |
| | | DS-1475ZJ-SUS(Black) |
| | | Vertical pole mount |
| | | Hik Black Stainless Steel 250 mm × 127 mm × 46 mm Diameter of clamp: Ø67-127mm 1205g |
| | | Other brackets are the same as Hik white camera |

















| Appearance | Model | Relevant brackets and housings | | | | |
|---|--|--|--|---|---|---|
| | | Indoor/Outdoor | | | | |
|  | DS-2CD2T42WD-13/15/18 DS-2CD2T22WD-13/15/18 DS-2CD2T85FWD-15/18 DS-2CD2T55FWD-15/18 DS-2CD2T45FWD-15/18 DS-2CD2T35FWD-15/18 DS-2CD2T25FWD-15/18 DS-2CD2T25FHW-15/18 DS-2CD2T83G0-15/18 DS-2CD2T63G0-15/18 DS-2CD2T43G0-15/18 DS-2CD2T23G0-15/18 |  |  |  |  |  |
|  | DS-2CD2T85G1-15/18 DS-2CD2T65G1-15/18 DS-2CD2T26G1-21/41 DS-2CD2T46G1-21/41 | DS-1275ZJ-SUS | DS-1260ZJ | DS-1276ZJ-SUS | DS-1280ZJ-S | DS-1275ZJ-S-SUS |
|  | DS-2CD2T26G2-ISU/SL DS-2CD2T46G2-ISU/SL DS-2CD2T86G2-ISU/SL | Vertical pole mount | Junction box | Corner mount | Junction box | Vertical pole mount |
|  | DS-2CD2626G2T-ISZ DS-2CD2646G2T-ISZ DS-2CD2686G2T-ISZ DS-2CD2688G1-IZ(S) DS-2CD2665G1-IZ(S) DS-2CD2645G1-IZ(S) DS-2CD2625G1-IZ(S) DS-2CD2646G1-IZ(S) DS-2CD2626G1-IZ(S) | | | | | |
|  | DS-2CD2683G1-IZ(S) DS-2CD2663G1-IZ(S) DS-2CD2643G1-IZ(S) DS-2CD2623G1-IZ(S) | Hikvision White Stainless Steel 127 mm × 46 mm × 250 mm (5" × 1.81" × 9.84") 1480 g (3.26 lb.) | Hikvision White Aluminum Alloy Ø88.5 mm 251g | Hik white Stainless Steel 126×105×250mm 2280g | Hik white Aluminum alloy Ø137 x 53.4x 164.8mm 527g | Hik white Stainless Steel 144 mm × 131.6 mm × 44.3 mm (5.67" × 5.18" × 1.74") 760 g (1.68 lb.) Match up with DS-1260ZJ |
|  | DS-2CD2T45G0P-I | | | | | |
|  | DS-2CD2T46G1-4I/SL DS-2CD2T26G1-4I/SL | | | | | |
|  | DS-2CD2T47G1-L DS-2CD2T27G1-L | | | | | |









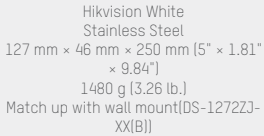


| Appearance | Model | Relevant brackets and housings | | | | | |
|---|---|--|---|---|---|--|--|
| | | Indoor/Outdoor | | | | | |
|  | DS-2C02T21G0-I(S) |  |  |  |  |  |  |
| | | DS-1296ZJ | DS-1292ZJ | DS-1203ZJ | DS-1297ZJ | DS-1214ZJ-T | DS-1275ZJ-SUS |
| | | Wall mount | Wall mount | Pendant Mount | Pendant Mount | Horizontal pole mount | Vertical pole mount |
| | | Hik white Plastic 70x79.1x196.5mm Included in the package | Hik white Aluminum alloy 70x97.1x217.9mm 201g | Hik white 70.4x84x200.5mm 220g | Hik white Aluminum Alloy Ø120x200mm 1035g | Hik white Steel(mounting board) S Stainless Steel(clamp) 194 mm × 117 mm × 138.5 mm (7.64" × 4.61" × 5.45") 1900 g (4.19 lb.) | Hikvision White Stainless Steel 127 mm × 46 mm × 250 mm (5" × 1.81" × 9.84") 1480 g (3.26 lb.) Match up with wall mount(DS-1292ZJ-XX(B)) |
|  |  |  |  |  | | | |
| DS-1276ZJ-SUS | DS-1232ZJ | DS-1232ZJ-T | DS-1297ZJ-ES | DS-1297ZJ-M | | | |
| Corner mount | Cardan Joint | Cardan Joint | Pendant mount (extendable) | Pendant mount (extendable) | | | |
| Hik white Stainless Steel 126x105x250mm 2280g Match up with wall mount(DS-1292ZJ-XX(B)) | Hik white Steel 126x103.5x83mm 790 | Hik white Steel 96x95x92.5mm | Hikvision White Aluminum Alloy Ø 97 mm × 270 mm to 400 mm (Ø 3.82" × 10.63" to 15.75") 500 g (1.10 lb.) | Hikvision White Aluminum Alloy Ø 120 mm × 650 mm to 1200 mm (Ø 4.72" × 25.59" to 47.24") 800 g (1.76 lb.) | | | |








| Appearance | Model | Relevant brackets and housings | | | |
|---|--|--|---|---|---|
| | | Indoor/Outdoor | | | |
|  | DS-2CD2555FWD-I(W)(S) DS-2CD2545FWD-I(W)(S) DS-2CD2535FWD-I(W)(S) DS-2CD2525FWD-I(W)(S) DS-2CD2525FHW-I(W)(S) DS-2CD256360--I(W)(S) DS-2CD254360--I(W)(S) DS-2CD252360--I(W)(S) |  |  |  |  |
| | | DS-1272ZJ-120 | DS-1271ZJ-120 | DS-1276ZJ-SUS | DS-1280ZJ-DM46 |
| | | Wall mount | Pendant mount | Corner mount | Junction box |
| | | Hik white Aluminum alloy 120×122×173.5mm 430g | Hik white Aluminum alloy ∅150×573mm 1900g | Hik white Stainless Steel 126X105X250mm 2280g Match up with wall mount(DS-1272ZJ-XX(B)) | Hik white Aluminum alloy ∅ 120 mm × 37.2 mm (∅ 4.72" × 1.46") 250g |
| | |  |  | | |
| | | DS-1275ZJ-SUS | DS-1272ZJ-120B | | |
| | | Vertical pole mount | Wall mount | | |
| | | Hikvision White Stainless Steel 127 mm × 46 mm × 250 mm (5" × 1.81" × 9.84") 1480 g (3.26 lb.) Match up with wall mount(DS-1272ZJ-XX(B)) | Hik white Aluminum alloy with junction box 123×180×223mm 1225g | | |







| Appearance | Model | Relevant brackets and housings | | | |
|---|--|---|---|---|---|
| | | Indoor/Outdoor | | | |
|  | DS-2CD2T85FWD-18 DS-2CD2T55FWD-18 DS-2CD2T45FWD-15/18 DS-2CD2T35FWD-18 DS-2CD2T25FWD-15/18 |  |  |  |  |
| | | DS-1275ZJ-SUS(Black) | DS-1260ZJ(Black) | DS-1276ZJ-SUS(Black) | DS-1280ZJ-S(Black) |
| | | Vertical pole mount | Junction box | Corner mount | Junction box |
|  | DS-2CD2T65G1-15 DS-2CD2T85G1-15 | Hik Black Stainless Steel 127×46×250mm Diameter of clamp: Ø67-127mm 1480g | Hik Black Alloy Ø 88.5 mm × 36 mm [Ø 3.48" × 1.42"] Approx. 251 g (0.55 lb.) | Hik Black Stainless Steel 126×105×250mm 2280g | Hik Black Aluminum alloy Ø137 × 53.4×164.8mm 527g |
| | | | | | |
| Other brackets are the same as Hik white camera | | | | | |














| Appearance | Model | Relevant brackets and housings | | | | |
|---|--|--|--|---|--|--|
| | | Indoor/Outdoor | | | | |
|  | DS-2CD2545FWD-I(S) DS-2CD2525FWD-I(S) DS-2CD2563G0--I(S) DS-2CD2543G0--I(S) DS-2CD2523G0--I(S) |  |  |  |  |  |
| | | DS-1272ZJ-120(Black) | DS-1271ZJ-120(Black) | DS-1276ZJ-SUS(Black) | DS-1280ZJ-DM46(Black) | DS-1275ZJ-SUS(Black) |
| | | Wall mount | Pendant mount | Corner mount | Junction box | Vertical pole mount |
| | | Hik Black Aluminum alloy 120×122×173.5mm 430g | Hik Black Aluminum alloy Ø150×57.3mm 1900g | Hik Black Stainless Steel 126×105×250mm 2280g Match up with wall mount(DS-1272ZJ-XX(B)) | Hik Black Aluminum alloy Ø 120 mm × 37.2 mm [Ø 4.72" × 1.46"] 250g | Hik Black Stainless Steel 127 mm × 46 mm × 250 mm [5" × 1.81" × 9.84"] 1480 g (3.26 lb.) Match up with wall mount(DS-1272ZJ-XX(B)) |
| Other brackets are the same as Hik white camera | | | | | | |









| Appearance | Model | Relevant brackets and housings | | | | |
|---|--|---|--|---|---|---|
| | | Indoor/Outdoor(suitable for indoor) | | | | |
|  | DS-2CD112360-I DS-2CD112360E-I DS-2CD114360-I DS-2CD115360-I |  |  |  |  |  |
| | | DS-1259ZJ | DS-1271ZJ-110 | DS-1272ZJ-110 | DS-1272ZJ-110B | DS-1276ZJ-SUS |
| | | Inclined ceiling mount | Pendant mount | Wall mount | Wall mount | Corner mount |
|  | DS-2CD114360E-I(F) |  |  |  |  | |
| | | DS-1280ZJ-DM18 | DS-1258ZJ | DS-1250ZJ | DS-1275ZJ-SUS | |
| | | Junction box | Wall mount | Rain shade | Vertical pole mount | |
|  | DS-2CD212160-I(W)(S) DS-2CD216560-I(S) DS-2CD2185FWD-I(S) DS-2CD2155FWD-I(S) DS-2CD2145FWD-I(S) DS-2CD2135FWD-I(S) DS-2CD2125FWD-I(S) DS-2CD2125FHWI-I(S) DS-2CD218360-I(S) DS-2CD216360-I(S) DS-2CD214360-I(S) DS-2CD212360-I(S) |  |  |  |  | |
| | | Hik white Aluminum alloy Ø115.4×43.8mm 450g | Hik white ABS plastic 120×111×161.5mm 200g | Hik white Composite Fibre 264.7*152*189.6 mm 199g | Hikvision White Stainless Steel 127 mm × 46 mm × 250 mm [5" × 1.81" × 9.84"] 1480 g (3.26 lb.) Match up with wall mount(DS-1272ZJ- XX(B)) | |






| Appearance | Model | Relevant brackets and housings | | | | |
|---|---|--|---|--|--|---|
| | | Indoor/Outdoor(suitable for indoor) | | | | |
|  | DS-2CD2165G0-I DS-2CD2185FWD-I DS-2CD2155FWD-I DS-2CD2145FWD-I(S) DS-2CD2125FWD-I DS-2CD2183G0-I(S) DS-2CD2163G0-I(S) DS-2CD2143G0-I(S) DS-2CD2123G0-I(S) |  |  |  |  |  |
| | | DS-1259ZJ(BLack) | DS-1271ZJ-110(BLack) | DS-1272ZJ-110(BLack) | DS-1272ZJ-110B(BLack) | DS-1276ZJ-SUS(BLack) |
| | | Inclined ceiling mount | Pendant mount | Wall mount | Wall mount | Corner mount |
| | | Hik Black ABS Plastic Φ111×39.2mm 200g | Hik Black Aluminum alloy Φ150×560mm 1900g | Hik Black Aluminum alloy 120×122×169mm 420g | Hik Black Aluminum alloy with junction box 123×180×227.8mm 1205g | Hik Black Stainless Steel 126×105×250mm 2280g Match up with wall mount(DS-1272ZJ-XX(B)) |
|  | DS-2CD2165G0-I DS-2CD2185FWD-I DS-2CD2155FWD-I DS-2CD2145FWD-I(S) DS-2CD2125FWD-I DS-2CD2183G0-I(S) DS-2CD2163G0-I(S) DS-2CD2143G0-I(S) DS-2CD2123G0-I(S) |  |  |  |  | |
| | | DS-1280ZJ-DM18(BLack) | DS-1258ZJ(BLack) | DS-1250ZJ(BLack) | DS-1275ZJ-SUS(BLack) | |
| | | Junction box | Wall mount | Rain shade | Vertical pole mount | |
| | | Hik Black Aluminum alloy Φ115.4×43.8mm 450g | Hik Black ABS plastic 120×111×161.5mm 200g | Hik Black Composite Fibre 264.7*152*189.6 mm 199g | Hik Black Stainless Steel 127×46×250mm Diameter of clamp: Φ67-127mm 1480g Match up with wall mount(DS-1272ZJ-XX(B)) | |










| Appearance | Model | Relevant brackets and housings | | | | | |
|---|--|---|---|---|---|--|---|
| | | Indoor/Outdoor | | | | | |
|  | DS-2CD2146G1-I(S) DS-2CD2126G1-I(S) |  |  |  |  |  |  |
| | DS-2CD2123G0-IU DS-2CD2143G0-IU DS-2CD2163G0-IU DS-2CD2183G0-IU | DS-1272ZJ-120 Wall mount | DS-1272ZJ-120B Wall mount | DS-1271ZJ-120 Pendant mount | DS-1276ZJ-SUS Corner mount | DS-1275ZJ-SUS Vertical pole mount | DS-1253ZJ-M Rain Shade for Outdoor Dome Camera |
| | DS-2CD2126G2-I(SU) DS-2CD2146G2-I(SU) | Hik white Aluminum alloy 120×122×173.5mm 430g | Hik white Aluminum alloy with junction box 123×180×223mm 1225g | Hik white Aluminum alloy Ø150×573mm 1900g | Hik white Stainless Steel 126X105X250mm 2280g Match up with wall mount(DS-1272ZJ-XX(B)) | Hikvision White Stainless Steel 127 mm × 46 mm × 250 mm (5" × 1.81" × 9.84") 1480 g (3.26 lb.) Match up with wall mount(DS-1272ZJ-XX(B)) | Hikvision White PP+30%GF Ø191.1×76mm 133g |







| Appearance | Model | Relevant brackets and housings | | | | |
|---|--|--|---|---|--|--|
| | | Indoor/Outdoor | | | | |
|  | DS-2CD2185G0-IMS DS-2CD2125G0-IMS |  |  |  |  |  |
| | DS-1272ZJ-120-TR15 | DS-1272ZJ-120B | DS-1271ZJ-120 | DS-1276ZJ-SUS | DS-1275ZJ-SUS | |
| | Hikvision White Aluminium Alloy 120 mm × 122 mm × 173 mm (4.72" × 4.80" × 6.81") Approx. 460 g (1.01 lb.) | Hik white Aluminum alloy with junction box 123×180×223mm 1225g | Hik white Aluminum alloy Ø150×573mm 1900g | Hik white Stainless Steel 126X105X250mm 2280g Match up with wall mount(DS-1272ZJ-XX(B)) | Hikvision White Stainless Steel 127 mm × 46 mm × 250 mm (5" × 1.81" × 9.84") 1480 g (3.26 lb.) Match up with wall mount(DS-1272ZJ-XX(B)) | |








| Appearance | Model | Relevant brackets and housings | | | | | |
|---|---|--|--|--|--|---|--|
| | | Indoor/Outdoor(suitable for indoor) | | | | | |
|  | DS-2CD172360-IZ DS-2CD174360-IZ DS-2CD175360-IZ |  |  |  |  |  |  |
| | | DS-1271ZJ-135 | DS-1273ZJ-135 | DS-1473ZJ-135B | DS-1275ZJ-SUS | DS-1276ZJ-SUS | DS-1227ZJ |
| | | Pendant mount | Wall mount | Wall mount with junction box | Vertical pole mount | Corner mount | In-ceiling mount |
| | | Hik white Aluminum alloy 150×150×565mm 1900g | Hik white Aluminum alloy 136×183.5×230mm 704g | Hik white Aluminum alloy with junction box 136×243×290mm 1490g | Hikvision White Stainless Steel 127 mm × 46 mm × 250 mm (5" × 1.81" × 9.84") 1480 g (3.26 lb.) Match up with wall mount(DS-1273ZJ-XX[B]) | Hik white Stainless Steel 126X105X250mm 2280g Match up with wall mount(DS-1273ZJ-XX[B]) | Hik white Aluminum alloy & ABS Plastic Ø210×90mm 540g Match up with D20-AP for 17XX models |
| | |  |  |  |  |  |  |
| | | D20-AP | DS-1280ZJ-DM21 | DS-1281ZJ-DM23 | DS-1253ZJ-L | DS-1250ZJ | DS-1258ZJ-L |
| Adapter Plate | Junction box | Inclined ceiling mount | Rain shade | Rain shade | Wall mount | | |
| Hik white Match up with DS-1227ZJ for 17XX models | Hik white Aluminum alloy 162×137×42mm 250g | Hik white Aluminum alloy 136.3×136.3×48mm 245g | Hik white Composite Fibre Ø225.1×98mm 198g Match up with wall mount(DS-1273ZJ-135) | Hik white Composite Fibre 264.7*152*189.6 mm 199g | Hik white Plastic 136×183×213mm 260g | | |










| Appearance | Model | Relevant brackets and housings | | | | | |
|---|---|---|---|--|---|---|--|
| | | Indoor/Outdoor | | | | | |
|  | DS-2CD2785G0-IZS DS-2CD2785G0-IZS DS-2CD2785FWD-IZS DS-2CD2755FWD-IZS(B) DS-2CD2745FWD-IZS DS-2CD2735FWD-IZS DS-2CD2725FWD-IZS DS-2CD2725FHW-IZS DS-2CD2783G0-IZS DS-2CD2763G0-IZS DS-2CD2743G0-IZS DS-2CD2723G0-IZS |  |  |  |  |  |  |
| | | DS-1471ZJ-155 | DS-1473ZJ-155 | DS-1475ZJ-SUS | DS-1473ZJ-155B | DS-1476ZJ-SUS | DS-1227ZJ-DM37 |
| | | Pendant Mount | Wall Mount | Vertical pole mount | Wall Mount | Corner mount | In-Ceiling Mount |
|  | DS-2CD2726G2-IZS DS-2CD2746G2-IZS DS-2CD2786G2-IZS | Hik white Aluminum alloy Ø155×150×565mm | Hik white Aluminum alloy 155×183.5×240mm | Hik white Stainless Steel 250 mm × 127 mm × 46 mm Diameter of clamp: Ø67-127mm 1205g Match up with wall mount(DS-1473Z-XX(B)) | Hik white Aluminum alloy 243×123×300mm 1750 g (3.86 lb.) | Hik white Stainless Steel 126X105X250mm 2280g Match up with wall mount(DS-1473ZJ-XX(B)) | Hik white Steel and Plastic Ø 225 mm × 98.2 mm (8.86" × 3.87") 700 g (1.54 lb.) |








| Appearance | Model | Relevant brackets and housings | | | | | |
|---|--|--|---|--|--|---|--|
| | | Indoor/Outdoor | | | | | |
|  | DS-2CD2785G0-IZS DS-2CD2785G0-IZS DS-2CD2785FWD-IZS DS-2CD2745FWD-IZS DS-2CD2735FWD-IZS DS-2CD2725FWD-IZS |  |  |  |  | Other brackets are the same as Hik white camera | |
| | | DS-1471ZJ-155(Black) | DS-1473ZJ-155(Black) | DS-1475ZJ-SUS(Black) | DS-1473ZJ-155B(Black) | | |
| | | Pendant Mount | Wall Mount | Vertical pole mount | Wall Mount | | |
| | | Hik Black Aluminum alloy Ø155×150×565mm | Hik Black Aluminum alloy 155×183.5×240mm | Hik white Stainless Steel 250 mm × 127 mm × 46 mm Diameter of clamp: Ø67-127mm 1205g Match up with wall mount(DS-1473Z-XX(B)) | Hik Black Aluminum alloy 243×123×300mm 1750 g (3.86 lb.) | | |












| Appearance | Model | Relevant brackets and housings | | | | | | |
|---|--|---|---|--|--|---|---|--|
| | | Indoor/Outdoor | | | | | | |
|  | DS-2CD2785G1-I(Z/S) DS-2CD2765G1-I(Z/S) DS-2CD2745G1-I(Z/S) DS-2CD2725G1-I(Z/S) DS-2CD2783G1-I(Z/S) DS-2CD2763G1-I(Z/S) DS-2CD2743G1-I(Z/S) DS-2CD2723G1-I(Z/S) DS-2CD2746G1-I(Z/S) DS-2CD2726G1-I(Z/S) |  |  |  |  |  |  |  |
| | | DS-1471ZJ-155 | DS-1473ZJ-155 | DS-1475ZJ-SUS | DS-1280ZJ-DM55 | DS-1473ZJ-155B | DS-1476ZJ-SUS | DS-1227ZJ-DM44 |
| | | Pendant Mount | Wall Mount | Vertical pole mount | Junction Box | Wall Mount | Corner mount | In-Ceiling Mount |
|  | DS-2CD2721G0-II(Z/S) | Hik white Aluminum alloy Ø155×150×565mm | Hik white Aluminum alloy 155×183.5×240mm | Hik white Stainless Steel 250 mm × 127 mm × 46 mm Diameter of clamp: Ø67-127mm 1205g Match up with wall mount(DS-1473Z-XX(B)) | Hikvision White Aluminum Alloy Ø 155 mm × 36 mm (Ø 6.1" × 1.42") 300 g (0.66 lb.) | Hik white Aluminum alloy 243×123×300mm 1750 g (3.86 lb.) | Hik white Stainless Steel 126X105X250mm 2280g Match up with wall mount(DS-1473ZJ-XX(B)) | Hikvision White SECC, PCSABS Ø 256.1 mm × 75.9 mm (Ø 10.08" × 2.99") Approx. 608.5 g (1.34 lb.) |







| Appearance | Model | Relevant brackets and housings | | | | | | |
|---|--|--|---|--|--|--|--|---|
| | | Indoor/Outdoor | | | | | | |
|  | DS-2CD2783G1-I(Z/S) DS-2CD2763G1-I(Z/S) DS-2CD2743G1-I(Z/S) DS-2CD2723G1-I(Z/S) |  |  |  |  |  | | |
| | | DS-1471ZJ-155(Black) | DS-1473ZJ-155(Black) | DS-1475ZJ-SUS(Black) | DS-1280ZJ-DM55(Black) | DS-1473ZJ-155B(Black) | | |
| | | Pendant Mount | Wall Mount | Vertical pole mount | Junction Box | Wall Mount | | Other brackets are the same as Hik white camera |
| | | Hik Black Aluminum alloy Ø155×150×565mm | Hik Black Aluminum alloy 155×183.5×240mm | Hik Black Stainless Steel 250 mm × 127 mm × 46 mm Diameter of clamp: Ø67-127mm 1205g Match up with wall mount(DS-1473Z-XX(B)) | Hik Black Aluminum Alloy Ø 155 mm × 36 mm (Ø 6.1" × 1.42") 300 g (0.66 lb.) | Hik Black Aluminum alloy 243×123×300mm 1750 g (3.86 lb.) | | |









| Appearance | Model | Relevant brackets and housings | | | | | |
|---|--------------------------------------|---|---|---|---|---|---|
| | | Indoor | | | | | |
|  | DS-2CD2935FWD-IS DS-2CD2955FWD-IS |  |  |  |  |  |  |
| | | DS-1294ZJ | DS-1281ZJ-DM27 | DS-1297ZJ | DS-1299ZJ | DS-1297ZJ-ES | DS-1297ZJ-M |
| | | Wall mount | Inclined ceiling mount | Pendant mount (extendable) | Pendant Mount | Pendant mount (extendable) | Pendant mount (extendable) |
| | | Hik white Toughened Plastic 223.9×80×125.8mm 450g | Hik white Plastic 111.8×40.5×108.3mm 45.8g | Hik white Aluminum alloy (Height 1000-2000mm) | Hik white Aluminum Alloy 77×77×198mm 165g | Hikvision White Aluminum Alloy Ø 97 mm × 270 mm to 400 mm (Ø 3.82" × 10.63" to 15.75") 500 g (1.10 lb.) | Hikvision White Aluminum Alloy Ø 120 mm × 650 mm to 1200 mm (Ø 4.72" × 25.59" to 47.24") 800 g (1.76 lb.) |








| Appearance | Model | Relevant brackets and housings | | | | | | |
|---|--|--|---|---|--|---|--|---|
| | | Indoor/Outdoor | | | | | | |
|  | DS-2CD238360-II(U) DS-2CD236360-II(U) DS-2CD234360-II(U) DS-2CD232360-II(U) DS-2CD2385FWD-I DS-2CD2355FWD-I DS-2CD2345FWD-I DS-2CD2335FWD-I DS-2CD2325FWD-I DS-2CD2325FHW-D-I |  |  |  |  |  |  |  |
| | | DS-1273ZJ-130-TRL | DS-1275ZJ-SUS | DS-1276ZJ-SUS | DS-1280ZJ-DM8 | DS-1281ZJ-M | DS-1271ZJ-130-TRL | DS-1273ZJ-130B-TRL |
| | | Wall mount | Vertical pole mount | Corner mount | Junction box | Inclined ceiling mount | Pendant mount | Wall mount |
|  | DS-2CD234560P-I | Hik white Aluminum alloy 131×183.5×228.5mm 890g | Hikvision White Stainless Steel 127 mm × 46 mm × 250 mm (5" × 1.81" × 9.84") 1480 g (3.26 lb.) Match up with wall mount(DS-1273ZJ-XX(B)) | Hik white Stainless Steel 126X105X250mm 2280g Match up with wall mount(DS-1273ZJ-J-XX(B)) | Hik white Aluminum alloy Ø126.7mm×35mm Approx.: 210 g (0.46 lb.) | Hik white Aluminum alloy 157×165.7×61.8mm 586g | Hikvision white Aluminum alloy Ø150×567mm | Hikvision White Aluminum Alloy Ø 132 mm × 242.9 mm × 288.5mm (5.20" × 9.56" × 11.36") 1690 g (3.73 lb.) |






| Appearance | Model | Relevant brackets and housings | | | | | |
|---|--|---|---|---|---|---|---|
| | | Indoor/Outdoor | | | | | |
|  | DS-2CD2385FWD-I DS-2CD2355FWD-I DS-2CD2345FWD-I DS-2CD2325FWD-I DS-2CD2383G0-II(U) DS-2CD2363G0-II(U) DS-2CD2343G0-II(U) DS-2CD2323G0-II(U)DS-2CD2821G0 |  |  |  |  |  |  |
| | | DS-1273ZJ-130-TRL(Black) | DS-1275ZJ-SUS(Black) | DS-1276ZJ-SUS(Black) | DS-1280ZJ-DM8(Black) | DS-1281ZJ-M(Black) | DS-1271ZJ-130-TRL(Black) |
| | | Wall mount | Vertical pole mount | Corner mount | Junction box | Inclined ceiling mount | Pendant mount |
| | | Hik Black Aluminum alloy 131×183.5×228.5mm 890g | Hik Black Stainless Steel 250 mm × 127 mm × 46 mm Diameter of clamp: Ø67-127mm 1480g Match up with wall mount(DS-1273ZJ-XX(B)) | Hik Black Stainless Steel 126X105X250mm 2280g Match up with wall mount(DS-1273ZJ-J-XX(B)) | Hik Black Aluminum alloy Ø126.7mm×35mm | Hik Black Aluminum alloy 157×165.7×61.8mm 586g | Hik Black Aluminum alloy Ø150×567mm |
| Other brackets are the same as Hik white camera | | | | | | | |










| Appearance | Model | Relevant brackets and housings | | | | | |
|---|--|---|--|---|--|---|---|
| | | Indoor/Outdoor | | | | | |
|  | DS-2CD2346G1-II(SL) DS-2CD2326G1-II(SL) DS-2CD2326G2-ISU/SL DS-2CD2346G2-ISU/SL DS-2CD2386G2-ISU/SL |  |  |  |  |  |  |
| | | DS-1271ZJ-140 | DS-1273ZJ-140 | DS-1280ZJ-DM21 | DS-1275ZJ-SUS | DS-1276ZJ-SUS | DS-1273ZJ-140B |
|  | DS-2CD2326G2-II(U) DS-2CD2346G2-II(U) DS-2CD2386G2-II(U) | Pendant Mount | Wall mount | Junction box | Vertical pole mount | Corner mount | Wall mount |
|  | DS-2CD2385G1-I DS-2CD2365G1-I | | | | | | |
|  | DS-2CD2H25G1-IZ(S) DS-2CD2H45G1-IZ(S) DS-2CD2H65G1-IZ(S) DS-2CD2H85G1-IZ(S) DS-2CD2H23G1-IZ(S) DS-2CD2H43G1-IZ(S) DS-2CD2H63G1-IZ(S) DS-2CD2H83G1-IZ(S) | Hik white Aluminum alloy Ø150×565mm 1900g | Hik white Aluminum alloy 140×183.5×232mm 703g | Hik white Aluminum alloy 162×137×42mm 250g | Hik white Stainless Steel 127×46×250mm Diameter of clamp: Ø67-127mm 1480g Match up with wall mount(DS-1273ZJ-XX(B)) | Hik white Stainless Steel 126X105X250mm 2280g Match up with wall mount(DS-1273ZJ-XX(B)) | Hik white Aluminum alloy with junction box 140×243×292mm 1488g |
|  | DS-2CD2347G1-L DS-2CD2347G1-LU DS-2CD2327G1-L DS-2CD2327G1-LU | | | | | | |






| Appearance | Model | Relevant brackets and housings | | | | | Other brackets are the same as Hik white camera |
|---|----------------------------------|---|--|---|---|---|---|
| | | Indoor/Outdoor | | | | | |
|  | DS-2CD238561-I DS-2CD236561-I |  |  |  |  |  | |
| | | DS-1271ZJ-140(Black) | DS-1273ZJ-140(Black) | DS-1280ZJ-DM21(Black) | DS-1275ZJ-SUS(Black) | DS-1276ZJ-SUS(Black) | |
| | | Pendant Mount | Wall mount | Junction box | Vertical pole mount | Corner mount | |
| | | Hik Black Aluminum alloy Φ150×565mm 1900g | Hik Black Aluminum alloy 140×183.5×232mm 703g | Hik Black Aluminum alloy 162×137×42mm 250g | Hik Black Stainless Steel 250 mm × 127 mm × 46 mm Diameter of clamp: Φ67-127mm 1480g Match up with wall mount(DS-1273ZJ-XX(B)) | Hik Black Stainless Steel 126X105X250mm 2280g Match up with wall mount(DS-1273ZJ-J-XX(B)) | |

| Appearance | Model | Relevant brackets and housings | | | | | | |
|---|-------------------|--|--|--|--|--|--|--|
| | | Indoor/Outdoor | | | | | | |
|  | DS-2CD232160-1/NF |  |  |  |  |  |  |  |
| | | DS-1272ZJ-110 | DS-1275ZJ-SUS | DS-1276ZJ-SUS | DS-1280ZJ-S | DS-1281ZJ-S | DS-1271ZJ-110 | DS-1272ZJ-110B |
| | | Wall mount | Vertical pole mount | Corner mount | Junction box | Inclined ceiling mount | Pendant mount | Wall mount |
| | | Hik white Aluminum alloy 120×122×169mm 420g | Hikvision White Stainless Steel 127 mm × 46 mm × 250 mm (5" × 1.81" × 9.84") 1480 g (3.26 lb.) Match up with wall mount (DS-1272ZJ-110(B)) | Hik white Stainless Steel 126X105X250mm 2280g Match up with wall mount (DS-1272ZJ-110(B)) | Hik white Aluminum alloy 137×53.4×164.8mm 527g | Hik white Aluminum alloy 137×56.5×147mm 472g | Hik white Aluminum alloy Φ150×560mm 1900g | Hik white Aluminum alloy with junction box 123×180×227.8mm 1205g |







| Appearance | Model | Relevant brackets and housings | | | | | |
|---|---|---|---|---|---|---|---|
| | | Indoor/Outdoor | | | | | |
|  | DS-2CD2H85FWD-IZS DS-2CD2H55FWD-IZS(B) DS-2CD2H45FWD-IZS DS-2CD2H35FWD-IZS DS-2CD2H25FWD-IZS DS-2CD2H25FHW-IZS DS-2CD2H8360-IZS DS-2CD2H6360-IZS DS-2CD2H4360-IZS DS-2CD2H2360-IZS |  |  |  |  |  |  |
| | | DS-1473ZJ-135 | DS-1471ZJ-135 | DS-1281ZJ-DM23 | DS-1475ZJ-SUS | DS-1476ZJ-SUS | DS-1473ZJ-135B |
| | | Wall mount | Pendant mount | Inclined ceiling mount | Vertical pole mount | Corner mount | Wall mount with junction box |
| | | Hik white Aluminum alloy 136×183.5×230mm 704g | Hik white Aluminum alloy 150×150×565mm 1900g | Hik white Aluminum alloy 136.3×136.3×48mm 245g | Hik white Stainless Steel 250 mm × 127 mm × 46 mm Diameter of clamp: Ø67-127mm 1205g Match up with wall mount(DS-1473ZJ-XX(B)) | Hik white Stainless Steel 126X105X250mm 2280g Match up with wall mount(DS-1473ZJ-XX(B)) | Hik white Aluminum alloy with junction box 136×243×290mm 1490g |

| Appearance | Model | Relevant brackets and housings | | | | |
|---|--|--|--|--|---|---|
| | | Indoor/Outdoor | | | | |
|  | DS-2CD2H85FWD-IZS DS-2CD2H45FWD-IZS DS-2CD2H35FWD-IZS DS-2CD2H25FWD-IZS |  |  |  |  | Other brackets are the same as Hik white camera |
| | | DS-1473ZJ-135(Black) | DS-1471ZJ-135(Black) | DS-1281ZJ-DM23(Black) | DS-1475ZJ-SUS(Black) | |
| | | Wall mount | Pendant mount | Inclined ceiling mount | Vertical pole mount | |
| | | Hik Black Aluminum alloy 136×183.5×230mm 704g | Hik Black Aluminum alloy 150×150×565mm 1900g | Hik Black Aluminum alloy 136.3×136.3×48mm 245g | Hik Black Stainless Steel 250 mm × 127 mm × 46 mm Diameter of clamp: Ø67-127mm 1205g Match up with wall mount(DS-1473ZJ-XX(B)) | |







| Appearance | Model | Relevant brackets and housings | | | |
|--|---|--|--|--|---|
| | | Indoor/Outdoor | | | |
|  | DS-2CD1H2160-IZ DS-2CD1H3160-IZ DS-2CD1H2360-IZ DS-2CD1H4360-IZ DS-2CD1H5360-IZ |  |  |  |  |
| | | DS-1273ZJ-130-TRL | DS-1275ZJ-SUS | DS-1276ZJ-SUS | DS-1280ZJ-M |
| | | Wall mount | Vertical pole mount | Corner mount | Junction box |
|  | DS-2CD234763E-L DS-2CD232763E-L |  |  |  | |
| | | DS-1281ZJ-M | DS-1271ZJ-130-TRL | DS-1273ZJ-130B-TRL | |
| | | Inclined ceiling mount | Pendant mount | Wall mount | |
| | | Hik white Aluminum alloy 131×183.5×228.5mm 890g | Hikvision White Stainless Steel 127 mm × 46 mm × 250 mm (5" × 1.81" × 9.84") 1480 g (3.26 lb.) Match up with wall mount(DS-1273ZJ-XX(B)) | Hik white Stainless Steel 126X105X250mm 2280g Match up with wall mount(DS-1273ZJ-XX(B)) | Hik white Aluminum alloy 157×184.8×53.4mm 621g |
| | | Hik white Aluminum alloy 157×165.7×61.8mm 586g | Hikvision white Aluminum alloy Ø150×567mm | Hikvision White Aluminum Alloy Ø 132 mm × 242.9 mm × 288.5mm (5.20" × 9.56" × 11.36") 1690 g (3.73 lb.) | |














| Appearance | Model | Relevant brackets and housings | | | |
|---|---|---|--|---|---|
| | | Indoor/Outdoor | | | |
|  | DS-2CD1321-I(D) DS-2CD1321-I(E) DS-2CD1331-I(D) DS-2CD1331-I DS-2CD1341-I DS-2CD131360-I DS-2CD132360-I DS-2CD132360E-I DS-2CD132360-IU DS-2CD134360-I DS-2CD135360-I |  |  |  |  |
| | | DS-1272ZJ-110-TRS | DS-1275ZJ-SUS | DS-1276ZJ-SUS | DS-1280ZJ-S |
| | | Wall mount | Vertical pole mount | Corner mount | Junction box |
| | | Hik white Aluminum alloy 120x122x169mm 420g | Hikvision White Stainless Steel 127 mm x 46 mm x 250 mm (5" x 1.81" x 9.84") 1480 g (3.26 lb.) Match up with wall mount(DS-1272ZJ-XX(B)) | Hik white Stainless Steel 126X105X250mm 2280g Match up with wall mount(DS-1272ZJ-XX(B)) | Hik white Aluminum alloy Ø137 x 53.4x 164.8mm 527g |















PTZ Dome Camera










| Appearance | Model | Relevant brackets and housings | | | | |
|---|--|---|---|--|---|---|
| | | Indoor | | | | |
|  | DS-2DE2A204(I)W-DE3 DS-2DE2A404(I)W-DE3 |  |  |  |  |  |
| | | DS-1294ZJ-PT | DS-1297ZJ | DS-1299ZJ | DS-1297ZJ-ES | DS-1297ZJ-M |
| | | Wall Mount | Pendant mount (extendable) | Pendant Mount | Pendant mount (extendable) | Pendant mount (extendable) |
| | | Hikvision White Plastic and Steel 223,5 mm × 125,8 mm × 80 mm (8.8" × 4.95" × 3.15") 480 g (1.06 lb.) | Hik white Aluminum alloy (Height 1000-2000mm) | Hik white Aluminum Alloy 77×77×198mm 165g | Hikvision White Aluminum Alloy ∅ 97 mm × 270 mm to 400 mm (∅ 3.82" × 10.63" to 15.75") 500 g (1.10 lb.) | Hikvision White Aluminum Alloy ∅ 120 mm × 650 mm to 1200 mm (∅ 4.72" × 25.59" to 47.24") 800 g (1.76 lb.) |























| Appearance | Model | Relevant brackets and housings |
|---|--|---|
| | | Indoor |
|  | DS-2DE2204IW-DE3 DS-2DE2204IW-DE3/W |  |
| | | DS-1294ZJ |
| | | Wall mount |
|  | DS-2DE2106IW-DE3 | Hik white Toughened Plastic 223.9×80×125.8mm 450g |









| Appearance | Model | Relevant brackets and housings | | | | |
|---|----------------------------------|--|---|--|---|--|
| | | Indoor/Outdoor | | | | |
|  | DS-2DE3204W-DE DS-2DE3304W-DE |  |  |  |  |  |
| | | DS-1227ZJ-PT6 | DS-1273ZJ-PT6 | DS-1280ZJ-PT6 | DS-1275ZJ-SUS | DS-1276ZJ-SUS |
| | | In-ceiling mount | Wall mount | Junction Box | Vertical pole mount | Corner mount |
| | | Hik white Steel+Platic ∅210×79.3mm 520 g | Hik white 183.5×140×232mm | Hik white Aluminum alloy 136.5×42×162.5mm 280g | Hik white Stainless Steel 127×46×250mm Diameter of clamp: ∅67-127mm 1205g Match up with DS_1273ZJ-PT6 | Hik white Stainless Steel 126×105×250mm 2280g Match up with DS_1273ZJ-PT6 |





| Appearance | Model | Relevant brackets and housings | | | | | |
|---|--|--|--|--|--|--|--|
| | | Outdoor(only available for outdoor PTZ model) | | | | | |
| | | | | | | | |
|  | DS-2DE4225W-DE DS-2DE4225W-DE DS-2AE4225T-D(C) DS-2AE4215T-D(C) |  |  |  |  |  |  |
| | | DS-1661ZJ | DS-1662ZJ | DS-1663ZJ | DS-1618ZJ | DS-1660ZJ | DS-1604ZJ |
| | | Pendant mount | Pendant mount | Ceiling mount | Wall mount(short arm) | Parapet wall mount | Wall Mount with junction box |
| | | Hik white Aluminum alloy Φ116.5×200mm 600g | Hik white Aluminum alloy Φ116.5×500mm 960g | Hik white Aluminum alloy Φ116.5×57mm 380g | Hik white Aluminum alloy 110×145×189mm 550g | Hik white Aluminum alloy 180×950×800mm 2900g | Hik white Aluminum alloy 255×171×355.5mm 2150g |
| | |  |  |  |  |  |  |
| | | DS-1604ZJ-pole | DS-1604ZJ-corner | DS-1604ZJ-box | DS-1604ZJ-BOX-POLE | DS-1604ZJ-BOX-CORNER | DS-1619ZJ |
| | | Vertical pole mount | Corner mount | Wall mount with junction box | Vertical Pole Mount with junction box | Wall Mount with junction box | Gooseneck mount |
| Hik white Aluminum alloy 170.7×261.8×355.5mm | Hik white Aluminum alloy 206.8×261.8×465mm | Hik white Aluminum alloy 281.2×170.7×395.5mm 2.15 Kg (4.74 lb.) | Hik white Aluminum alloy & steel 222×139.3×422mm | Hik white Aluminum alloy & steel 255.5×314×542.5mm | Hik white Aluminum alloy 455.2×130.4×841.5mm | | |



| Appearance | Model | Relevant brackets and housings | | | | | | |
|---|--|--|--|--|--|--|--|---|
| | | Outdoor(only available for outdoor PTZ model) | | | | | | |
|  | DS-2AE4225TI-D(C) DS-2AE4215TI-D(C) DS-2DE4425W-DE DS-2DE4415W-DE DS-2DE4225W-DE DS-2DE4215W-DE |  |  |  |  |  |  |  |
| | | DS-1661ZJ | DS-1662ZJ | DS-1663ZJ | DS-1618ZJ | DS-1660ZJ | DS-1604ZJ | DS-1604ZJ-pole |
| | | Pendant mount | Pendant mount | Ceiling mount | Wall mount(short arm) | Parapet wall mount | Wall Mount with junction box | Vertical pole mount |
| | | Hik white Aluminum alloy Φ116.5×200mm 600g | Hik white Aluminum alloy Φ116.5×500mm 960g | Hik white Aluminum alloy Φ116.5×57mm 380g | Hik white Aluminum alloy 110×145×189mm 550g | Hik white Aluminum alloy 180×950×800mm 2900g | Hik white Aluminum alloy 255×171×355.5mm 2150g | Hik white Aluminum alloy 170.7×261.8×355.5mm |
| | |  |  |  |  |  |  | |
| | | DS-1604ZJ-corner | DS-1604ZJ-box | DS-1604ZJ-BOX-POLE | DS-1604ZJ-BOX-CORNER | DS-1619ZJ | DS-1671ZJ-SDM9 | |
| | | Corner mount | Wall mount with junction box | Vertical Pole Mount with junction box | Wall Mount with junction box | Gooseneck mount | In-ceiling mount | |
| | | Hik white Aluminum alloy 206.8×261.8×465mm | Hik white Aluminum alloy 281.2×170.7×395.5mm | Hik white Aluminum alloy & steel 222×139.3×422mm 5.7 kg (12.57 lb.) | Hik white Aluminum alloy & steel 255.5×314×542.5mm 6.2 Kg (13.67 lb.) | Hik white Aluminum alloy 455.2×130.4×841.5mm | Hik Black Steel + plastic Φ232.9×142.6mm | |








| Appearance | Model | Relevant brackets and housings | | | |
|---|--|--|--|--|--|
| | | Outdoor(only available for outdoor PTZ model) | | | |
|  | DS-2DE4A220IW-DE DS-2DE4A320IW-DE DS-2DE4A425IW-DE DS-2DE4A404IW-DE DS-2DE4A225IW-DE DS-2DE4A215IW-DE DS-2DE4A204IW-DE |  |  |  |  |
| | | DS-1605ZJ | DS-1671ZJ-SD11 | DS-1280ZJ-SD11 | DS-1691ZJ-L |
| | | Wall Mount Bracket | In-ceiling Mount Bracket | Junction Box | Pendant mount |
| | | Hik white Aluminum alloy 183.5×120×228.6mm 1120g | Hik white Aluminum alloy Φ233×85mm 640 g (1.4 lb.) | Hik white Aluminum alloy Φ157.7 mm × 39.7 mm (6.2" × 1.6") 450 g (0.99 lb.) | Hik white Steel 124×84×1000mm 2175g |
| | |  |  |  |  |
| | | DS-1691ZJ-M | DS-1691ZJ | DS-1275ZJ-SUS | DS-1276ZJ-SUS |
| | | Pendant mount | Pendant mount | Vertical pole mount | Corner mount |
| | | Hik white Steel 124×84×500mm 1175g | Hik white Aluminum alloy 84×124×335mm 980g | Hik white Stainless Steel 127×46×250mm Diameter of clamp: Φ67-127mm 1205g Match up with DS_1605ZJ | Hik white Stainless Steel 126×105×250mm 2280g Match up with DS_1605ZJ |






| Appearance | Model | Relevant brackets and housings | | | | | | |
|---|--|---|--|---|---|---|---|---|
| | | Outdoor(only available for outdoor PTZ model) | | | | | | |
|  | DS-2DE5432IW-AE DS-2DE5425IW-AE DS-2DE5232IW-AE DS-2DE5225IW-AE DS-2AE5232TI-A(C) DS-2AE5225TI-A(C) |  |  |  |  |  |  |  |
| | | DS-1661ZJ | DS-1662ZJ | DS-1663ZJ | DS-1660ZJ | DS-1604ZJ | DS-1604ZJ-pole | DS-1604ZJ-corner |
| | | Pendant mount | Pendant mount | Ceiling mount | Parapet wall mount | Wall mount | Vertical pole mount | Corner mount |
|  | DS-2DE5425W-AE DS-2DE5330W-AE DS-2DE5320W-AE DS-2DE5232W-AE DS-2DE5225W-AE DS-2AE5232T-A(C) DS-2AE5225T-A(C) |  |  |  |  |  |  | |
| | | DS-1604ZJ-box | DS-1604ZJ-BOX-POLE | DS-1604ZJ-BOX-CORNER | DS-1619ZJ | DS-1667ZJ | DS-1602ZJ | |
| | | Wall mount with junction box | Vertical Pole Mount with junction box | Wall Mount with junction box | Gooseneck mount | Extendable pole for Pendant mount | Wall Mount | |
|  | DS-2AE7232TI-A (C) DS-2AE7225TI-A (C) |  |  |  |  |  |  | |
| | | Hik white Aluminum alloy 281.2×170.7×395.5mm | Hik white Aluminum alloy & steel 222×139.3×422mm | Hik white Aluminum alloy & steel 255.5×314×542.5mm | Hik white Aluminum alloy 455.2×130.4×841.5mm | Hik white Galvanized steel pipe 1500-2500mm | Hik white Aluminum alloy 97X182X305mm | |





| Appearance | Model | Relevant brackets and housings | | | | | |
|---|------------------------------------|---|--|---|---|---|---|
| | | Outdoor | | | | | |
|  | DS-2PT5326IZ-DE |  |  |  |  |  |  |
| | | DS-1604ZJ | DS-1604ZJ-pole | DS-1604ZJ-corner | DS-1661ZJ | DS-1619ZJ-H2 | DS-1602ZJ |
| | | Wall Mount with junction box | Vertical pole mount | Corner mount | Pendant mount | Gooseneck Mount | Wall Mount |
|  | DS-2PT5306IZ-DE DS-2PT5306BZ-DE | | | | | | |
| | | Hik white Aluminum alloy 255×171×355.5mm 2150g | Hik white Aluminum alloy 170.7×261.8×355.5mm | Hik white Aluminum alloy 206.8×261.8×465mm | Hik white Aluminum alloy Ø116.5×200mm 600g | Hik white Stainless Steel Ø 130 mm × 455 mm × 526 mm (5.12" × 17.91" × 20.71") 5200 g (12.46 lb.) | Hik white Aluminum alloy 97X182X305mm |





| Appearance | Model | Relevant brackets and housings | |
|---|--------------------------------------|--|---|
| | | Indoor | |
|  | DS-2PT3326IZ-DE3 DS-2PT3122IZ-DE3 |  |  |
| | | DS-1294ZJ-TRL | DS-1271ZJ-PT10 |
| | | Wall Mount | Pendant Mount |
|  | DS-2PT3306IZ-DE3 | | |
| | | Hik white PC+ABS | Hik white Aluminum Alloy and Plastic Ø 160.6 mm × 532 mm (6.32" × 20.9") 1300 g (2.87 lb.) |

| | |
|--|--|
|  |  |
| DS-1682ZJ | DS-1673ZJ |
| Extendable pole for Pendant mount | horizontal pole mount |
| Hik white Aluminum alloy 500mm Match up with pendant mount(DS-1661ZJ,DS-1662ZJ) | Hik white Steel(mounting board) & Stainless Steel(clamp) Diameter of clamp: Ø67-127mm Match up with pendant mount |


















| Appearance | Model | Relevant brackets and housings | | | | | |
|---|---------------|---|--|--|---|---|---|
|  | DS-2TD1217/V1 |  |  |  |  |  |  |
| | | DS-1271ZJ-140 | DS-1273ZJ-140 | DS-1275ZJ-SUS | DS-1276ZJ-SUS | DS-1273ZJ-140B | DS-1280ZJ-DM21 |
| | | Pendant Mount | Wall mount | Vertical pole mount | Corner mount | Wall mount | Junction box |
| | | Hik white Aluminum alloy Ø150×565mm 1900g | Hik white Aluminum alloy 140×183.5×232mm 703g | Hik white Stainless Steel 127×46×250mm Diameter of clamp: Ø67-127mm 1480g Match up with wall mount[DS-1273ZJ-XX(B)] | Hik white Stainless Steel 126×105×250mm 2280g Match up with wall mount[DS-1273ZJ-XX(B)] | Hik white Aluminum alloy with junction box 140×243×292mm 1488g | Hik white Aluminum alloy 162×137×42mm 250g |







| Appearance | Model | Relevant brackets and housings | | |
|---|--------------|---|--|--|
|  | DS-2TD2617V1 |  |  |  |
| | | DS-1275ZJ-SUS | DS-1276ZJ-SUS | DS-1260ZJ |
| | | Vertical pole mount | Corner mount | Junction box |
|  | DS-2TD2117V1 | <p>Hik white Stainless steel 127 mm × 46 mm × 250 mm (5" × 1.81" × 9.84") 1480 g (3.26 lb.)</p> <p>Hik white Stainless steel 126X105X250mm 2280g</p> <p>Hik white Aluminum alloy Ø 88.5 mm × 36 mm (Ø 3.48" × 1.42") 251g</p> | | |



| Indoor housing | | | | | | | |
|---|-----------|-----------|--|---|---|---|---|
| Appearance | Housing | Model | Key Feature | Available Camera Models | Bracket Model | | |
|  | DS-1330HZ | DS-1330HZ | Hik white Complex fiber 290×142×92 mm 640 g | DS-2CD2821G0 DS-2CC12D9T-(A) DS-2CC12D9T-E DS-2CE37U8T-A |  |  |  |
| | | | | | DS-1293ZJ | DS-1299ZJ | DS-1269ZJ |
| | | | | | Wall mount | Pendant Mount | Pendant mount |
| | | | | | Hik white Aluminum alloy 88×116.6×297.3mm 473g | Hik white Aluminum Alloy 77×77×198mm 165g | Hik white Aluminum alloy 493×246×88mm 480g |

| Indoor housing | | | | | | | |
|---|-----------|-----------|--|---|--|--|--|
| Appearance | Housing | Model | Key Feature | Available Camera Models | Bracket Model | | |
|  | DS-1332HZ | DS-1332HZ | Hik white Aluminum alloy 288×149×100mm 800g | DS-2CD2821G0 DS-2CC12D9T-(A) DS-2CC12D9T-E DS-2CE37U8T-A |  |  |  |
| | | | | | DS-1293ZJ | DS-1299ZJ | DS-1269ZJ |
| | | | | | Wall mount | Pendant Mount | Pendant mount |
| | | | | | Hik white Aluminum alloy 88×116.6×297.3mm 473g | Hik white Aluminum Alloy 77×77×198mm 165g | Hik white Aluminum alloy 493×246×88mm 480g |

Outdoor Housing

| Appearance | Housing | Model | Key Feature | Available Camera Models | Bracket Model | | | | |
|---|------------------|--------------|---|---|--|--|---|--|---|
|  | DS-1331HZ series | DS-1331HZ-C | Hik white Aluminum alloy Containing fan DC12V IP66 110×165×445mm 1900g | DS-200282160 DS-2001209T-(A) DS-2001209T-E DS-2003708T-A |  |  |  |  |  |
|  | | DS-1331HZ-H | Hik white Aluminum alloy Containing fan and heater AC24V IP66 110×165×445mm 1900g | | DS-1293ZJ | DS-1269ZJ | DS-1214ZJ | DS-1214ZJ-T | DS-1233ZJ |
|  | | DS-1331HZ-W | Hik white Aluminum alloy Containing fan and wiper AC24V IP66 445×165×170mm 1900g | | Wall mount | Pendant mount | Horizontal pole mount | Horizontal pole mount | Column Mount |
|  | | DS-1331HZ-HW | Hik white Aluminum alloy Containing fan, wiper and heater AC24V IP66 445×165×170mm 2500g | | Hik white Aluminum alloy 88×116.6×297.3mm 473g | Hik white Aluminum alloy 493×246×88mm 480g | Hik white Steel(mounting board) & Stainless Steel(clamp) 117×226×194mm Diameter of clamp: Ø67-127mm 1895g | Hik white Steel(mounting board) & Stainless Steel(clamp) | Hik white Steel Ø160 x 1093mm 6200g |
|  | | DS-1331HZ-CI | Hik white Aluminum alloy Containing fan DC12V IP66 IK10 445×140×94mm 1900g | |  |  |  |  | |
|  | | DS-1331HZ-HI | Hik white Aluminum alloy Containing fan and heater AC 24V(DC 12V) IP66 IK10 110×165×445mm 1900g | | DS-1232ZJ | DS-1232ZJ-T | DS-1275ZJ-SUS | DS-2204ZJ | |
|  | | DS-1331HZ-T | Hik white Aluminum alloy Containing fan and heater AC 24V(DC 12V) IP66 suitable for wide angle lens and fish-eye lens 454.2×169.2×114.6mm 1900g | | Cardan Joint | Cardan Joint | Vertical pole mount | Wall mount | |
|  | | DS-1331HZ-R | Hik white Aluminum alloy Containing fan and heater AC 24V(DC 12V) IP66 suitable for wide angle lens and fish-eye lens 454.2×169.2×114.6mm 1900g | | Hik white Steel 126×103.5×83mm 790 | Hik white Steel 96×95×92.5mm | Hik white Stainless Steel 127×46×250mm Diameter of clamp: Ø67-127mm 1205g Match up with wall mount(DS-1293ZJ) | Hik white Aluminum alloy 413.5×228.7×120mm 1859g | |

| Outdoor housing | | | | | | | |
|---|-----------|-------------|---|---|---|---|--|
| Appearance | Housing | Model | Key Feature | Available Camera Models | Bracket Model | | |
|  | DS-4718HZ | DS-4718HZ-K | Hik white Aluminum alloy Containing fan and heater AC 24V(DC 12V) IP66 174×153×550mm 2500g | DS-2CD2821G0 DS-2CC12D9T-(A) DS-2CC12D9T-E DS-2CE37U8T-A |  |  |  |
| | | | | | DS-1293ZJ Wall mount | DS-1269ZJ Pendant mount | DS-1214ZJ Horizontal pole mount |
| | | | | | Hik white Aluminum alloy 88×116.6×297.3mm 473g | Hik white Aluminum alloy 493×246×88mm 480g | Hik white Steel(mounting board) & Stainless Steel(clamp) 117×226×194mm Diameter of clamp: Ø67- 127mm 1895g |
| | | | | |  |  | |
| | | | | | DS-1214ZJ-T Horizontal pole mount | DS-1275ZJ-SUS Vertical pole mount | |
| | | | | | Hik white Steel(mounting board) & Stainless Steel(clamp) | Hik white Stainless Steel 127×46×250mm | Diameter of clamp: Ø67- 127mm 1205g Match up with wall mount(DS- 1293ZJ) |

| Outdoor housing | | | | | | |
|---|-----------|-----------|--|---|--|--|
| Appearance | Housing | Model | Key Feature | Available Camera Models | Bracket Model | |
|  | DS-1340HZ | DS-1340HZ | Three-axis adjustment Containing combined wires and fan IK10 | DS-2CD2821G0 DS-2CC12D9T-(A) DS-2CC12D9T-E DS-2CE37U8T-A |  | |
| | | | | | DS-1275ZJ-4626 Vertical Pole Mount | |
| | | | | | Hik white Steel(mounting board) & Stainless Steel(clamp) 127×46×250mm 1235g For 40 series box camera | |

Accessories

Power Adapter




Power Adapters

| Power Adapter | Details | Available Models |
|---------------|---|---|
| DC12V 1A | DS-2FA1201-DL,12V/1A,American standard,Ø2.1 | Most IPC, analog camera and DS-2DE3/2xxx series mini PTZ models |
| | DS-2FA1201-DL,12V/1A,European standard,Ø2.1 | |
| | DS-2FA1201-DL,12V/1A,Indian standard,Ø2.1 | |
| DC12V 1A | ADS-12FG-12N 12012EPG,12V/1A,European standard,Two-wire, WHITE PACKAGE | Most IPC, analog camera and DS-2DE3/2xxx series mini PTZ models |
| | ADS-12FG-12N 12012EPG,12V/1A,European standard,Ø2.1, WHITE PACKAGE | |
| | ADS-12FG-12N 12012EPCU,12V/1A,American standard,Two-wire, WHITE PACKAGE | |
| | ADS-12FG-12N 12012EPCU,12V/1A,American standard,Ø2.1, WHITE PACKAGE | |
| | ADS-12FG-12N 12012EPB,12V/1A,British standard,Two-wire, WHITE PACKAGE | |
| | ADS-12FG-12N 12012EPB,12V/1A,British standard,Ø2.1, WHITE PACKAGE | |
| DC12V 1.5A | MSA-C1500IC12.0-18P-US, DC12V/1.5A, American standard plug, Ø2.1 | |
| | MSA-C1500IC12.0-18P-DE, DC12V/1.5A, Europe standard plug, Ø2.1 | |
| | MSA-C1500IC12.0-18P-GB, DC12V/1.5A, British standard plug, Ø2.1 | |
| DC12V 2A | MSA-C2000IC12.0-24P-GB,British standard,12V2A,Ø2.1 | Indoor mini PanoVu and high power consumption IPC and analog camera |
| | MSA-C2000IC12.0-24P-DE,European standard,12V2A,Ø2.1 | |
| | MSA-C2000IC12.0-24P-US,American standard,12V2A,Ø2.1 | |
| Waterproof | DS-2PA1201-WRD, 12 VDC/1 A, Wall Mount | |
| SMPS | DS-2FA1225-D4(EUR), 4 Channels, 12 VDC/1 A per channel, European standard | |
| | DS-2FA1225-D4(IND), 4 Channels, 12 VDC/1 A per channel, Indian standard | |
| | DS-2FA1225-D4(UK), 4 Channels, 12 VDC/1 A per channel, British standard | |
| | DS-2FA1205-D8(EUR), 8 Channels, 12 VDC/1 A per channel, European standard | |
| | DS-2FA1205-D8(IND), 8 Channels, 12 VDC/1 A per channel, Indian standard | |
| | DS-2FA1205-D8(UK), 8 Channels, 12 VDC/1 A per channel, British standard | |

Accessories

Camera Tester

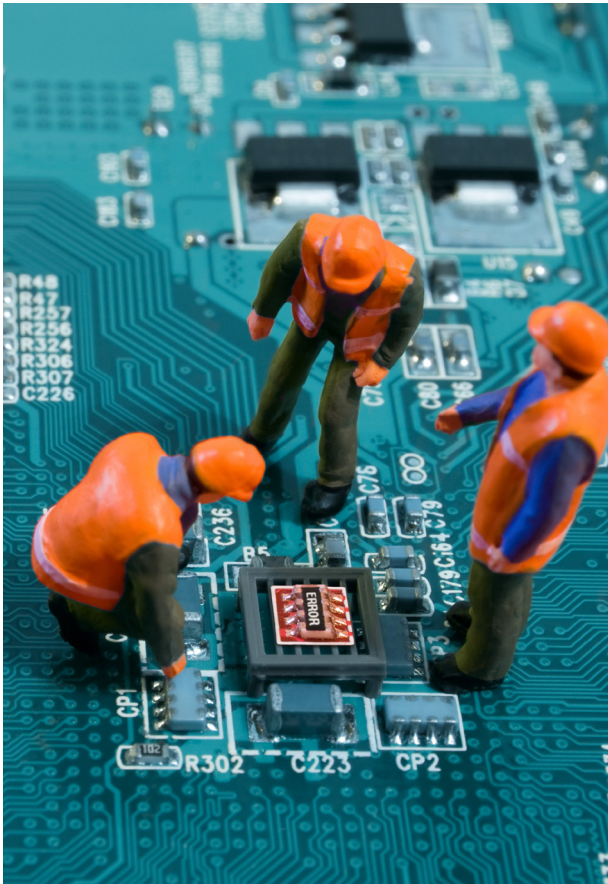

IPC-4300H

Network camera tester, 4.3" Screen, with ANSI/EN/BS/AS power supply, Support IP/CVBS/TVI(AHD/CVI) input

Accessories

Pickup



Pickup

| Picture | Models | Key Features |
|--|--------------------|---|
|  | DS-2FP2020 | Pickup range:70 sq.m, Audio transmission distance:3000m, Frequency response:20Hz ~ 20KHz, SNR:60dB(1m40 dB audio tone SPL)40dB(10m 40 dB audio tone SPL)1KHz at 1 Pa, Dynamic Range:70dB(1KHz at Max dB SPL) |
|  | DS-2FP4021-B | Pickup Scope:60 m2 / continuously adjustable, Gain Adjustment Scope:30dB/ continuous, Pickup Direction:Full Directions /360°, Frequency Response:100Hz ~ 16KHz(1kHz@94Db SPL), Dynamic Range:85dB, Output Impedance:600 Ohm unbalanced |
|  | 3.5mm plug adapter | match up with pick up for camera with 3.5mm jack |

CCTV CHANNEL PRODUCTS

2021 H1

Hikvision Europe

Dirk Storklaan 3
2132 PX Hoofddorp
The Netherlands
T +31 23 5542770
info.eu@hikvision.com

Hikvision France

6 rue Paul Cézanne,
93360 Neuilly-Plaisance
France
T +33 (0)1 85330450
info.fr@hikvision.com

Hikvision Poland

Business Garden, Budynek B3
ul. Żwirki i Wigury 16B,
02-092 Warszawa
T +48 4600150
info.pl@hikvision.com

Hikvision Czech

BETA Building, Vyskocilova
1481/4, Prague 4
Czech Republic
T +42 29 6182640
info.cz@hikvision.com

Hikvision Germany

Werner-Heisenberg Str. 2b
63263 Neu-Isenburg,
Germany
T +49 69 401507290
sales.dach@hikvision.com

Hikvision Romania

Splaiul Independentei street
291-293, Riverside Tower,
12th floor, 6th district,
Bucharest, Romania
T +31235542770/988
marketing.ro@hikvision.com

Hikvision Belgium

Neringenweg 44,
3001 Leuven, Belgium
T +31 23 5542770
info.bnl@hikvision.com

Hikvision Hungary

Budapest, Reichl Kálmán u.
8,
1031, Hungary
T +36 1 323 7650
info.hu@hikvision.com