

# Network Video Recorder NVR532-E-IM Series



## Features

- Support Ultra 265/H.265/H.264 video formats
- Support 128/256-channel input
- Support 2-ch HDMI, 2-ch VGA, HDMI1 at up to 8K (7680x4320) resolution, HDMI2 at up to 4K (3840x2160) resolution
- Support VGA1 and HDMI1 simultaneous output, VGA2 and HDMI2 simultaneous output. VGA1/HDMI1 and VGA2/HDMI2 independent output
- Support up to 32 Megapixels resolution recording
- Support redundant power supply optional
- Support HDD hot swap with RAID 0, 1, 5, 6, 10, 50, 60 storage scheme configurable
- Support 12V power output
- Support ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade
- Support N+1 Hot spare

## Specifications


| Model                           | NVR532-128E-R-IM  | NVR532-256E-R-IM  |
|---------------------------------|---|---|
| <b>Decoding</b>                 |   |   |
| Decoding Format                 | Ultra 265, H.265, H.264   |   |
| Decoding Capability             | H265: 3 x 32MP@30, 6 x 16MP@30, 8 x 12MP@30, 12 x 4K@30, 16 x 6MP@30, 19 x 5MP@30, 24 x 4MP@30, 32 x 3MP@30, 48 x 1080P@30, 96 x 720P@30, 128 x D1@30<br>H264: 2 x 32MP@30, 4 x 16MP@30, 6 x 12MP@30, 9 x 4K@30, 12 x 6MP@30, 14 x 5MP@30, 18 x 4MP@30, 24 x 3MP@30, 36 x 1080P@30, 72 x 720P@30, 128 x D1@30 | H265: 3 x 32MP@30, 6 x 16MP@30, 8 x 12MP@30, 12 x 4K@30, 16 x 6MP@30, 19 x 5MP@30, 24 x 4MP@30, 32 x 3MP@30, 48 x 1080P@30, 96 x 720P@30, 192 x D1@30<br>H264: 2 x 32MP@30, 4 x 16MP@30, 6 x 12MP@30, 9 x 4K@30, 12 x 6MP@30, 14 x 5MP@30, 18 x 4MP@30, 24 x 3MP@30, 36 x 1080P@30, 72 x 720P@30, 144 x D1@30 |
| Decoding Capability Description | The resolution of each channel cannot exceed 8640 pixels in length or width, For VGA/HDMI independent output, the VGA live video is output by default. To output the highest resolution video from the HDMI port, please clear the VGA video on the preview page.   |   |
| Audio Compression               | G.711A, G.711U  |   |
| <b>Network</b>                  |   |   |
| Incoming Bandwidth              | 8K OFF: 768 Mbps, 8K ON: 512 Mbps   |   |
| Outgoing Bandwidth              | 8K OFF: 768 Mbps, 8K ON: 640 Mbps   |   |
| Max Users Can Be Added          | 128   |   |
| Remote Users                    | 128   |   |
| Protocols                       | TCP/IP, P2P, SMTP, NFS, 802.1x, RTSP, UPnP, NTP, DHCP, PPPoE, HTTP, DNS, DDNS, SNMP, IPv4, HTTPS  |   |
| Browser (Plugin)                | Chrome 45+, Edge 79+, Firefox 52+   |   |
| Browser (Plugin-Free)           | Chrome 57+, Edge 16+, Firefox 58+, Safari 11+   |   |
| <b>Video/Audio Input</b>        |   |   |
| IP Video Input                  | 128-ch  | 256-ch  |
| RCA Audio Input                 | 1-ch  |   |
| <b>Peripheral Input</b>         |   |   |
| Ip Speaker                      | 16-ch   |   |
| POS                             | All channels  |   |
| <b>Video/Audio Output</b>       |   |   |
| Video Output                    | Support 2-ch HDMI, 2-ch VGA, HDMI1 and VGA1 simultaneous output, HDMI2 and VGA2 simultaneous output, HDMI1/VGA1 and HDMI2/VGA2 independent output   |   |
| HDMI Output                     | HDMI1: 8K (7680 × 4320)/30 Hz, 4K (3840 2160)/60 Hz, 1920 × 1080/60 Hz,; HDMI2: 4K (3840 × 2160)/60 Hz, 1920 × 1080/60 Hz   |   |
| VGA Output                      | 1920 × 1080/60 Hz   |   |
| HDMI Standard                   | HDMI1: 2.1, HDMI2: 2.0  |   |
| RCA Audio Output                | 2-ch  |   |
| Liveview Display                | 1/4/6/8/9/16/25/36/64   |   |
| Default Num of Live Screen      | 64  |   |
| Corridor Mode Screen            | 3/4/5/7/9/10/12/16/32   |   |

|                                  |   |
|----------------------------------|---|
| Playback Screen                  | 1/4/9/16  |
| Corridor Mode Screen of Playback | 1/3   |
| <b>Two-way Audio</b>             |   |
| Two-way Audio                    | 1-ch, RCA (Using the audio input and output)  |
| <b>Snapshot</b>                  |   |
| FTP/Schedule/Event Snapshot      | 16-ch snapshot (max. 8 MP (3840 × 2160) video resolution, with 1080P snapshot resolution)   |
| <b>Recording</b>                 |   |
| Recording Resolution             | 32 MP/16 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080P/960P/720P/D1/2CIF/CIF  |
| Num of Concurrent Playback       | 32-ch   |
| Synchronous Playback in Local    | 16-ch   |
| <b>Smart</b>                     |   |
| Smart by IPC                     | All channels (up to 64 images/s in total) Face Detection, Face Comparison, Vehicle Detection (LPR), Temperature Detection, SIP, UMD, Video Metadata, Traffic Monitoring                   |
| Smart by NVR                     | Face Detection, Face Comparison, Ultra Motion Detection (UMD), Smart Intrusion Prevention (SIP)   |
| Smart by NVR Analyzer Mode       | Single Mode (Face Recognition), Single Mode (SIP), Single Mode (UMD), Modes cannot active simultaneously, only one mode can active at a time.   |
| VCA Search                       | Face Snapshot Search, Face Comparison Search, Motor Vehicle Search, Non-Motor Vehicle Search, Human Body Search, General Search, People Counting Report, Heat Map                         |
| by NVR                           | Up to 32-ch with UNV Face Detection Camera, Up to 6-ch with normal camera (UNV and Third-part brand, 6-ch 2MP, 3-ch 4MP, 1-ch 4K)   |
| SIP by NVR with normal cameras   | Up to 24-ch with normal camera (UNV and Third-part brand, 24-ch 2MP, 12-ch 4MP, 6-ch 4K)  |
| UMD by NVR with normal cameras   | Up to 32-ch with normal camera (UNV and Third-part brand, 32-ch 2MP, 16-ch 4MP, 8-ch 4K)  |
| Vehicle Picture Library          | Up to 5 vehicle picture libraries, with up to 5,000 vehicle pictures in total   |
| Capacity of Snapshot Records     | 3 millions records for face snapshot, 3 millions records for vehicle snapshot, 3 millions records for SIP   |
| <b>Alarm</b>                     |   |
| General Alarm                    | Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, Motion Detection, Tampering, Human Body Detection, Video Loss, Audio Detection, Alarm Input |
| Alert Alarm                      | IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal, Array Damaged, Array Degraded           |
| <b>Hard Disk</b>                 |   |
| SATA                             | 32 SATA Interfaces  |
| Capacity                         | Up to 24 TB for each HDD (The maximum HDD capacity varies with environment temperature and hard disk size, The environment temperature for use should not exceed 40°C.)                   |
| Disk Group                       | Support   |
| Redundant Storage                | Support   |
| Disk Array Type                  | RAID 0, 1, 5, 6, 10, 50, 60   |

|                                  |   |
|----------------------------------|---|
| Hot Swap                         | Support   |
| <b>External Interface</b>        |   |
| Network Interface                | 2 RJ45 10 M/100 M/1000 M self-adaptive Ethernet Interface |
| Network Working Mode             | Multi-access, load balance, network fault-tolerance       |
| USB                              | Front panel: 2 × USB2.0, Rear panel: 2 × USB3.0           |
| RS485                            | 1   |
| RS232                            | 1   |
| Alarm In                         | 16-ch   |
| Alarm Out                        | 10-ch   |
| Power Output                     | 12 V  |
| Extension Board                  | N/A   |
| Buzzer                           | Support   |
| Power Supply                     | AC 220 V  |
| Power Switch                     | Support   |
| Redundant Power Supply           | Support   |
| <b>Working Environment</b>       |   |
| Working Temperature              | -10 °C to 55 °C (14 °F to 131 °F)                         |
| Working Humidity                 | ≤ 95% RH (non-condensing)                                 |
| Power Consumption (without HDD)  | ≤ 50W   |
| Heat Dissipation                 | Fan, Radiator   |
| <b>Dimensions</b>                |   |
| Weight (without HDD)             | ≤ 13.13Kg   |
| Height                           | 4U  |
| Dimensions                       | 532.8mm x 484.6mm x175mm                                  |
| <b>Certification</b>             |   |
| Certification                    | CE; FCC; UL; RoHS; WEEE                                   |
| CE                               | EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035        |
| FCC                              | Part15 Subpart B  |
| <b>Feature Supported</b>         |   |
| N+1 Hot Spare                    | Support   |
| Fisheye Dewarping by IPC         | Support   |
| Fisheye Dewarping by NVR (Local) | Support (1 × 4MP or 1 × 5 MP)                             |
| Dual-lens Cameras                | Support   |
| Box-Dome Linkage                 | Support   |
| ANR                              | Support   |
| Downlink ONVIF                   | Support (Profile S)                                       |
| Video Image Database (Uplink)    | Support   |
| UCS (Web socket)                 | Support   |
| NAS                              | Support   |
| Ucode Basic Mode                 | Support   |

|                     |   |
|---------------------|---|
| Ucode Advanced Mode | Support   |
| Output Mode         | Support   |
| GUI Language        |   |
| GUI Language        | 38 languages: Simplified Chinese, Traditional Chinese, English, Vietnamese, Thai, Turkish, Spanish (Latin America), Portuguese (Brazil), Spanish, Portuguese, French, German, Italian, Dutch, Polish, Czech, Hungarian, Slovak, Russian, Hebrew, Arabic, Ukrainian, Estonian, Bulgarian, Greek, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenia, Serbia, Korean, Japanese, Latvian, Lithuanian, Persian |

## Dimensions

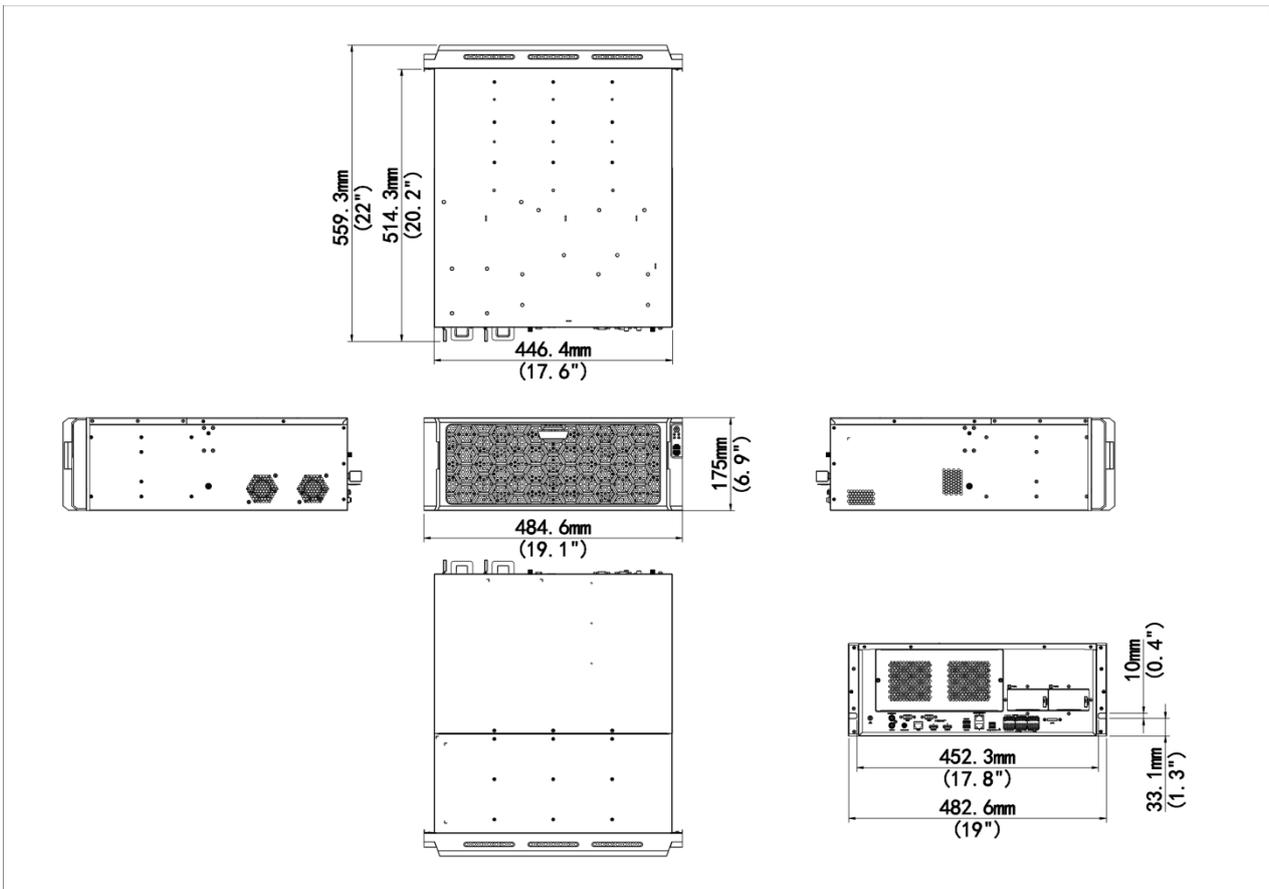

### Zhejiang Uniview Technologies Co., Ltd.

- <http://www.uniview.com>
- [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)
- No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.  
 \*Product specifications and availability are subject to change without notice.  
 \*Despite our best efforts, technical or typographical errors may exist in this document.  
 Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.