


CAMERA

TD-9525S4

2MP IR Water-proof Turret Network Camera



- H.265+ / H.265 / H.264+ / H.264 / MJPEG coding
- Max.resolution: 2MP (1920 × 1080)
- ICR auto switch, true day / night vision
- 3D DNR, WDR, HLC, BLC, smart IR, etc.
- 30~50m IR night view distance
- Built-in micro SD card slot, up to 256GB
- 1CH built-in MIC; 1CH audio input
- DC12V/PoE power supply
- IP 67 ingress protection
- Support dual streams
- Support remote monitoring by smart phones& tablet PCs with iOS and Android OS
- Intelligent analytics

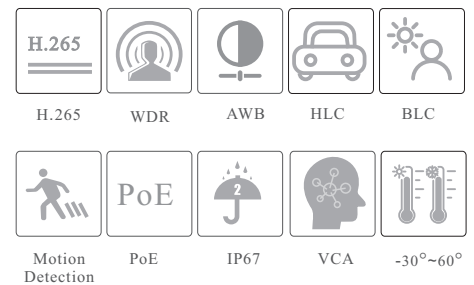

en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777

E-mail: overseas@tvt.net.cn


SPECIFICATIONS

Specifications	Model	TD-9525S4			
Camera					
Image Sensor	1 / 2.8 "CMOS				
Image Size	1920×1080				
Electronic Shutter	1/3s ~ 1 / 100000s				
Iris Type	Fixed Iris				
Min. Illumination	0.008 lux @F1.6, AGC ON; 0 lux with IR				
Lens	2.8~12mm@F1.4, varifocal lens				
Field of View	Horizontal: 101.9 °~33°; Vertical: 54.3 °~19°; Diagonal: 124.7°~39 °				
Lens Mount	Ø14				
Day&Night	ICR				
Wide Dynamic Range	Digital WDR				
BLC	Yes				
HLC	Yes				
Digital NR	Yes				
Angle Adjustment	Pan: 0°~360°; Tilt:0°~80°;Rotation: 0°~360°				
Image					
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264/ MJPEG				
H.265 Compression Standard	Main Profile@Leve4.1 High Tier				
Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, CIF				
Main Stream	60Hz: 1080P/720P(1~30fps); 50Hz: 1080P/720P(1~25fps)				
Sub Stream	60Hz: D1/CIF (1~30fps);50Hz: D1/CIF (1~25fps)				
Bit Rate	128 Kbps ~ 4 Mbps				
Bit Rate Type	VBR / CBR				
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser				
ROI	Each ROI to be configured separately				
Interfaces					
Network	RJ45				
Video Output	No				
Audio	1CH audio input; 1CH built-in MIC				
Storage	Built-in micro SD card slot, up to 256GB				
Reset	Yes				
Functions					
Remote Monitoring	Web browser /TVT NVR/NVMS2.X/Mobile APP				
Web Browser	IE (plug-in required)/Google Chrome/Edge/Firefox/Safari				
Online Connection	Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission				
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, PPPoE, DDNS, SMTP, FTP, 802.1x, SNMP, UPnP, HTTP, HTTPS, QoS				
Interface Protocol	ONVIF				
Storage	Network remote storage; micro SD card storage				
Smart Alarm	Motion detection, SD card full, SD card error				
Smart Event	Video Exception (scene change, video blur and video cast detection), line crossing detection and region intrusion detection				
General Function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock,				
PoE	Yes, IEEE802.3af				
IR Distance	30 ~ 50 m				
Ingress Protection	IP67				
DORI Distance					
Lens	Detect	Observe	Recognize	Identify	
2.8~12mm(W)	43.13m(141.50ft)	17.25m(56.59ft)	8.63m(28.31ft)	4.31m(14.14ft)	
2.8~12mm(T)	131.90m(432.74ft)	52.76m(173.09ft)	26.38m(86.54ft)	13.19m(43.27ft)	

Others

Power Supply	DC12V/PoE
Power Consumption	< 7W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F);Humidity: less than 95 % (non-condensing)
Storage Environment	- 30 °C ~ 65°C (-22°F~149°F), Humidity: less than 95 % (non-condensing)
Dimensions (mm)	Ø 111.5 × 99.6
Weight (net)	Approx. 0.65KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)

DIMENSIONS

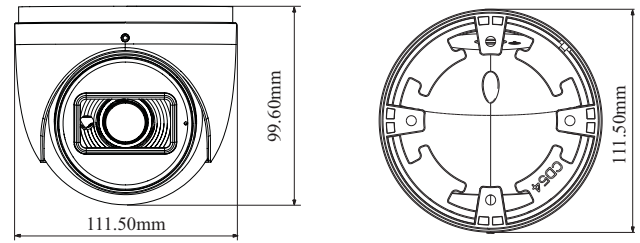

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-9525S4(D/FZ/PE/AR3)	Manual zoom lens
-----------------	------------------------	------------------