





LCD VIDEO WALL

FEATURES

TINY BEZEL SCREEN SPLICING

Choose from a wide range of ultra-thin bezel splicing LCD screens to meet a multitude of requirements and needs.







0.77/0.88 mm

1.7/1.8 mm

3.5 mm

BEST CHIPS, BEST PANEL, BEST DISPLAY

Enjoy lossless signal transmission, more extensive color gamut coverage, and abundant colors with the advanced chips and 8-bit processing power.





UNIFORM COLOR AND BRIGHTNESS

Ultra-uniform color and brightness imaging using dynamic self-adapting Noise Reduction, Edge Processing, and Cross Color Suppression.

INDUSTRIAL GRADE HARDWARE DESIGN

Guard against interference from radiation, magnetic fields, and strong electric fields with the metal housing design using Hikvision's patented 2 mm carbon sheet metal and electrostatic spray.

PRODUCT LIST



Size: 46"

- Resolution: 1920 ×1080
- Bezel width: 1.7 / 3.5 / 5.3 mm
- Brightness: 500, 700 cd/m²
- Contrast: 4000:1
- Display color: 16.7 M (8-bit)
- Designed for 24/7 Operation



Size: 49"

- Resolution: 1920 ×1080
- Bezel width: 3.5 mm
- Brightness: 500 cd/m²
- Contrast: 4000:1
- Display color: 16.7 M (8-bit)
- Designed for 24/7 Operation




Size: 55"

- Resolution: 1920 ×1080
- Bezel width: 1.8 / 3.5 mm
- Brightness: 500, 700, 800 cd/m²
- · Contrast: 4000:1
- Display color: 16.7 M (8-bit)
- Designed for 24/7 Operation





VIDEO WALL CONTROLLER

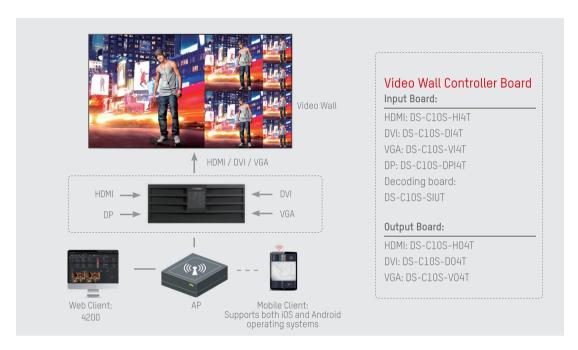

FEATURES

- Signal transmission without delay or loss
- Adaptable control mode



- Supports multiple signal and resolution
- Multiple image splicing patterns for live view



PRODUCT LIST



Video Wall Controller Chassis DS-C10S-S22T

- 8U casing
- 12 input slot
- 10 output slot



Video Wall Controller Chassis DS-C10S-S11T

- 4U casing
- 6 input slot
- 5 output slot



Video Wall Controller Chassis

DS-C10S-S09T

- 4U casing
- 6 input slot
- 3 output slot





LED DISPLAY INDOOR

FEATURES

16:9 ASPECT RATIO FOR COMMON RESOLUTIONS

Supports common 1080p and 4K resolutions with equal proportions. The standard structure simplifies splicing several screens together and enables easy installation and maintenance.




CONVENIENT CONTROLS, ABUNDANT FUNCTIONS

- Switch among LED screen signal sources via IR remote control.
- Adjust signal source resolution to LED screen.
- · Supports smart dehumidification.

HIGH-PRECISION SEAMLESS SPLICING

Its die-cast aluminum design and six-point magnetic structure creates excellent stability, providing a stunning viewing experience.



EXTENSIVE OPERATING LIFE

With its modular design, the screen is easy to mount and maintain. Dual-power, industry-leading quality control makes it a perfect candidate for 24/7 operation.

PRODUCT LIST



Fine Pitch LED - Front

- Pixel pitch: 1.25, 1.58, 1.85, 2.52 mm
- Maintenance: Front
- Brightness: ≥ 800 cd/m²
- · Viewing angle: 160 degrees Hor./Vert.
- Contrast: ≥ 6,000:1
- Refresh rate: 3,840 Hz
- Service life: > 100,000 hours



Fine Pitch LED - Rear

- Pixel pitch: 1.27, 1.588, 1.906, 2.54 mm
- Maintenance: Rear
- Brightness: ≥ 800 cd/m²
- Viewing angle: 160 degrees Hor./Vert.
- Contrast: ≥ 6,000:1
- Refresh rate: 3,840 Hz
- Service life: > 100,000 hours



Indoor Fixed - Rear

- Pixel pitch: 2.5, 3.0, 3.75 mm
- Maintenance: Rear
- Brightness: ≥ 1,000 cd/m²
- Viewing angle: 160 degrees Hor./Vert.
- Contrast: ≥ 3,000:1
- Refresh Rate: 1,920 Hz
- Service life: > 100,000 hours





LED DISPLAY OUTDOOR

FEATURES

IP65 RATING FOR WATER AND DUST RESISTANCE

Prevents rust or short circuits caused by water penetrating the LED units.



RELIABLE POWER SUPPLY

The best power supply in the industry, provided by a reliable brand, ensuring safety, high stability, and low failure rates.

EXTENDED OPERATION LIFE

With a modular design, the screen is easy to mount and maintain. Dual-power and industry-leading quality control make it a perfect candidate for 24/7 operation.

EFFICIENT HEAT DISSIPATION

Open shutters behind the LED ventilate and dissipate heat and prevent water seeping in. The combination of fans and air conditioning creates extremely efficient heat dissipation.

PRODUCT LIST



Outdoor LED

- Pixel pitch: 4, 5, 6, 8, 10, 16 mm
- Brightness: ≥ 5,500 cd/m2
- \bullet Viewing angle: 120 degrees Hor./Vert.
- Refresh Rate: ≥ 1,920 Hz
- Operation temperature: -20-50℃
- Service life: > 100,000 hours
- Waterproof level: IP65





TRANSPARENT DISPLAY

FEATURES

THIN, LIGHTWEIGHT DESIGN

The ultra-thin screen body – only $15\,\mathrm{kg}$ – can be directly installed onto a glass curtain wall without an extra steel structure, saving space and installation costs.





30% ENERGY REDUCTION

The transparent part of the screen does not provide light when in use. By utilizing lateral luminescence encapsulation technology, the energy use of this screen is 30% lower than traditional LED screens, along with other benefits such as small size, high brightness, and low current.

RAPID HEAT DISSIPATION

The transparent screen features better heat dissipation thanks to its "hollowed out" design.



HIGH TRANSPARENCY AT 65%-95%

The light bars are less than 2 mm thick, which enables high onscreen transparency .

PRODUCT LIST



Curtain wall LED transparent display

- Pixel pitch (mm, Hor./Vert.): 3.9 x 7.8 / 5 x 7 / 6 x 8
- Transparency: 65%-95%
- Brightness: ≥ 5,000 cd/m2
- Viewing angle: 160 degrees Hor./Vert.
- Weight: ≤ 16kg / m²
- Service life: > 100,000 hours





Showcase LED transparent display

- Pixel pitch (mm, Hor./Vert.): 5 x 8
- Transparency: 65%-95%
- Brightness: ≥ 5,000 cd/m2
- Viewing angle: 160 degrees Hor./Vert.
- Weight: ≤ 21kg / unit
- Service life: > 100,000 hours



DIGITAL SIGNAGE

FEATURES

PERSONALIZED LAYOUT WITH MULTIPLE CONTENT BLOCKS

Personalize your own layouts to display various media formats, including pictures, audio or video files, scrolling subtitles, PDF files, webpages, and live videos.


FREE MANAGEMENT SOFTWARE

Specially designed for small-scale applications with fewer than 30 sets. License limitation: 30 Terminals.

SCHEDULED PLAYLIST

Display schedule can be set by the hour, day, or week.

LARGE-SCALE INTEGRATED MANAGEMENT SOLUTION

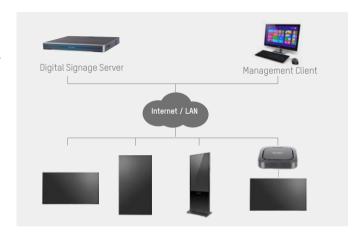

PRODUCT LIST

Wall-mounted digital signage - FL Series

DS-D6032/43/55FL-B

Coming soon



- Size: 31.5" / 42.5" / 54.6"
- Resolution: 1920 x 1080
- Android 6.0.1
- 2 GB RAM, 8 GB EMMC, 32 GB TF Card
- USB / RJ45 / Wi-Fi
- Designed for 24/7 Operation
- Portrait and landscape
- Metal frame, tempered glass



Floor-standing digital signage

DS-D6043/55FL-B/S

Coming soon



- Resolution: 1920 x 1080
- Ultra Narrow Bezel
- Android 6.0.1
- 2 GB RAM, 8 GB EMMC+ 32 GB TF Card
- USB / RJ45 / Wi-Fi
- Designed for 24/7 Operation
- Metal frame, tempered glass



Wall-mounted digital signage - FN Series

DS-D6043/55FN-B

Coming soon

- Size: 42.5" / 54.6"
- Resolution: 1920 x 1080
- Ultra Narrow Bezel, metal frame
- Android 6.0.1
- 2 GB RAM, 8 GB EMMC+ 32 GB TF Card
- USB / RJ45 / Wi-Fi
- Designed for 24/7 Operation
- Portrait and landscape

Digital signage Box

DS-D60C-B

- Resolution: Up to 4K
- Ultra Narrow Bezel
- Android 6.0.1
- 2 GB RAM, 8 GB EMMC+ 1 TF Card slot
- HDMI / Audio in / Audio out / Wi-Fi
- Plastic rack
- 145 x 145 x 31.89 mm









INTERACTIVE DISPLAY

FEATURES

ULTRA 4K RESOLUTION

4K resolution is four times the resolution of 1080p and renders more detail.



BUILT-IN WHITEBOARD SOFTWARE

Abundant functionality includes powerful brush, 20-point IR touchscreen, infinite whiteboards, and more.



ACCURATE ON-SCREEN WRITING

With the 1 mm writing accuracy rate, users will enjoy a better writing experience.



WIRELESS SCREEN MIRRORING

One-click for wireless projection of your PC or mobile phone. Multiscreen interaction among devices and the interactive tablet is made possible for convenient and efficient operation.



PRODUCT LIST



Size: 65" DS-D5A65RB / A

- Resolution: UHD 4K resolution
- Dual OS, default Android, Window w / OPS optional
- 1 mm writing accuracy
- Built-in whiteboard software
- Screen mirroring via Wi-Fi
- Write and save notes on any page



Size: 75" DS-D5A75RB / A

- Resolution: UHD 4K resolution
- Dual OS, default Android, Window w / OPS ontional
- 1 mm writing accuracy
- Built-in whiteboard software
- Screen mirroring via Wi-Fi
- Write and save notes on any page



Size: 86" DS-D5A86RB / A

- Resolution: UHD 4K resolution
- Dual OS, default Android, Window w / OPS optional
- 1 mm write accuracy
- · Built-in whiteboard software
- Screen mirroring via Wi-Fi
- Write and save notes on any page

VERTICAL SOLUTIONS RETAIL

Hikvision technologies make full use of mall spaces, enhancing communication among customers and improving the total experience. * Recommended models are for reference only. Please consult professionals for actual applications. **Shop Guidance Outdoor LED Displays** Entrances Restaurants Floor-Standing Touch Digital Signage Outdoor Seamless LED Display LED Transparent Display Wall-Mounted Digital Signage DS-D44A0F0 DS-D4A39TI-GW DS-D6043FL-B/S DS-D6043FL-B Eye-catching display effect and large, seamless display area. Information display, advertisements, and shopping guidance Shopping guidance, push advertisements, promotional information and menu displays

Buildings

In every corner of the building, we provide corresponding display products to

let the audience experience the most amazing viewing possible. * Recommended models are for reference only. Please consult professionals for actual applications. **Meeting Rooms** Lobbies Surveillance Centers **Entrances** LCD Video Wall Interactive Display Floor-Standing Digital Signage LCD Video Wall DS-2046NL-C DS-D5A86RB/A DS-D2055NL-E/G DS-D6055FL-B/S Write and save notes on any page Shows clear images from cameras. Enjoy wireless screen mirroring Tiny bezel screens empower monitoring

Education

Hikvision's educational display meets any teaching requirement, including safe monitoring, information display, interactive education, and much more.

* Recommended models are for reference only. Please consult professionals for actual applications.



Exhibitions

Hikvision's exhibition display fulfills everything you need for an event, from huge LED displays that can play promotional videos, to floor-standing digital signage and interactive display that allow for easy information viewing and search, making the entire







REMARKABLE PERFORMANCE **OUTSTANDING RELIABILITY** HIKVISION COMMERCIAL DISPLAYS

Distributed by

HIKVISION'

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998

Hikvision USA

T +1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia

T+61-2-8599-4233 salesau@hikvision.com

Hikvision India

T +91-22-28469900 sales@pramahikvision.com

Hikvision Canada

sales.canada@hikvision.com

Hikvision Thailand

sales.thailand@hikvision.com

Hikvision Germany T +49-69-401507290 sales.adch@hikvision.com

Hikvision Europe

T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Brazil

Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia sales.my@hikvision.com

Hikvision Philippines sales.ph@hikvision.com

Hikvision UK & Ireland

T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172

sale.africa@hikvision.com

Hikvision France T +33(0)1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan

nikia.panfilov@hikvision.ru

Hikvision Vietnam

sales.vt@hikvision.com

Hikvision UAE

salesme@hikvision.com

Hikvision Singapore T +65-6684-4718

sg@hikvision.com

Hikvision Spain

info.es@hikvision.com

Hikvision Tashkent

uzb@hikvision.ru

Hikvision Hong Kong

info.hk@hikvision.com

Hikvision Russia

T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea

T +82-(0)31-731-8817 sales.korea@hikvision.com

Hikvision Poland

Γ+48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia

Sales.Indonesia@hikvision.com

Hikvision Colombia

sales.colombia@hikvision.com

www.hikvision.com

Follow us on social media to get the latest product and solution information:



n Hikvision



HikvisionHQ



HikvisionHQ



hikvision Instagram



Hikvision Corporate Channel