





## LCD VIDEO WALL

## **FEATURES**

### TINY BEZEL SCREEN SPLICING

Choose from a wide range of ultra-thin bezel splicing LCD screens to meet a multitude of requirements and needs.







0.77/0.88 mm

1.7/1.8 mm

3.5 mm

## BEST CHIPS, BEST PANEL, BEST DISPLAY

Enjoy lossless signal transmission, more extensive color gamut coverage, and abundant colors with the advanced chips and 8-bit processing power.





## UNIFORM COLOR AND BRIGHTNESS

Ultra-uniform color and brightness imaging using dynamic self-adapting Noise Reduction, Edge Processing, and Cross Color Suppression.

## INDUSTRIAL GRADE HARDWARE DESIGN

Guard against interference from radiation, magnetic fields, and strong electric fields with the metal housing design using Hikvision's patented 2 mm carbon sheet metal and electrostatic spray.

## PRODUCT LIST



#### Size: 46"

- Resolution: 1920 ×1080
- Bezel width: 1.7 / 3.5 / 5.3 mm
- Brightness: 500, 700 cd/m²
- Contrast: 4000:1
- Display color: 16.7 M (8-bit)
- Designed for 24/7 Operation



Size: 49"

- Resolution: 1920 ×1080
- Bezel width: 3.5 mm
- Brightness: 500 cd/m²
- Contrast: 4000:1
- Display color: 16.7 M (8-bit)
- Designed for 24/7 Operation




Size: 55"

- Resolution: 1920 ×1080
- Bezel width: 1.8 / 3.5 mm
- Brightness: 500, 700, 800 cd/m²
- · Contrast: 4000:1
- Display color: 16.7 M (8-bit)
- Designed for 24/7 Operation



# VIDEO WALL CONTROLLER

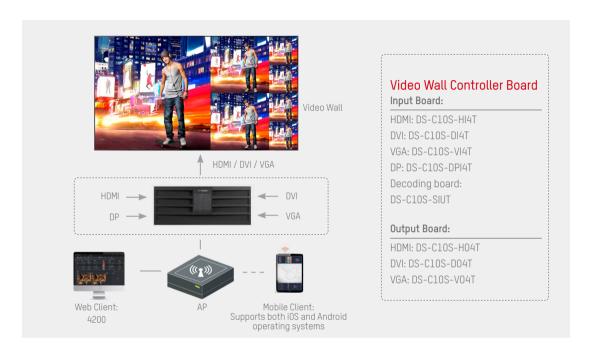


## **FEATURES**

- Signal transmission without delay or loss
- Adaptable control mode



- Supports multiple signal and resolution
- Multiple image splicing patterns for live view



## PRODUCT LIST



## Video Wall Controller Chassis DS-C10S-S22T

- 8U casing
- 12 input slot
- 10 output slot



### Video Wall Controller Chassis DS-C10S-S11T

- 4U casing
- 6 input slot
- 5 output slot



## Video Wall Controller Chassis

DS-C10S-S09T

- 4U casing
- 6 input slot
- 3 output slot





# LED DISPLAY INDOOR

## **FEATURES**

### 16:9 ASPECT RATIO FOR COMMON RESOLUTIONS

Supports common 1080p and 4K resolutions with equal proportions. The standard structure simplifies splicing several screens together and enables easy installation and maintenance.




## CONVENIENT CONTROLS, ABUNDANT FUNCTIONS

- Switch among LED screen signal sources via IR remote control.
- Adjust signal source resolution to LED screen.
- · Supports smart dehumidification.

### HIGH-PRECISION SEAMLESS SPLICING

Its die-cast aluminum design and six-point magnetic structure creates excellent stability, providing a stunning viewing experience.



## **EXTENSIVE OPERATING LIFE**

With its modular design, the screen is easy to mount and maintain. Dual-power, industry-leading quality control makes it a perfect candidate for 24/7 operation.

## PRODUCT LIST



#### Fine Pitch LED - Front

- Pixel pitch: 1.25, 1.4, 1.58, 1.85, 2.52 mm
- · Maintenance: Front
- Brightness: ≥ 800 cd/m²
- · Viewing angle: 160 degrees Hor./Vert.
- Contrast: ≥ 6,000:1
- Refresh rate: 3,840 Hz
- Service life: > 100,000 hours



## Fine Pitch LED - Rear

- Pixel pitch: 1.27, 1.588, 1.906, 2.54 mm
- Maintenance: Rear
- Brightness: ≥ 800 cd/m²
- Viewing angle: 160 degrees Hor./Vert.
- Contrast: ≥ 6,000:1
- Refresh rate: 3,840 Hz
- Service life: > 100,000 hours



## DIGITAL SIGNAGE

## **FEATURES**

## PERSONALIZED LAYOUT WITH MULTIPLE CONTENT BLOCKS

Personalize your own layouts to display various media formats, including pictures, audio or video files, scrolling subtitles, PDF files, webpages, and live videos.


#### FREE MANAGEMENT SOFTWARE

Specially designed for small-scale applications with fewer than 30 sets. License limitation: 30 Terminals.

## SCHEDULED PLAYLIST

Display schedule can be set by the hour, day, or week.

## LARGE-SCALE INTEGRATED MANAGEMENT SOLUTION

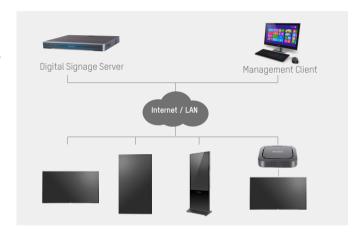

## PRODUCT LIST

#### Wall-mounted digital signage - FL Series

#### DS-D6032/43/55FL-B

Coming soon

Coming soon



- Size: 31.5" / 42.5" / 54.6"
- Resolution: 1920 x 1080
- Android 6.0.1
- 2 GB RAM, 8 GB EMMC, 32 GB TF Card
- USB / RJ45 / Wi-Fi
- Designed for 24/7 Operation
- Portrait and landscape
- Metal frame, tempered glass

## Digital signage Box

#### DS-D60C-B

Resolution: Up to 4K

DS-D6043/55FN-B

Android 6.0.1

Size: 42.5" / 54.6"

Resolution: 1920 x 1080

USB / RJ45 / Wi-Fi Designed for 24/7 Operation

Portrait and landscape

Ultra Narrow Bezel, metal frame

2 GB RAM, 8 GB EMMC+ 32 GB TF Card

- Ultra Narrow Bezel
- Android 6.0.1
- 2 GB RAM, 8 GB EMMC+ 1 TF Card slot
- HDMI / Audio in / Audio out / Wi-Fi

Wall-mounted digital signage - FN Series

Coming soon

- Plastic rack
- 145 x 145 x 31.89 mm



#### DS-D6043/55FL-B/S





- Resolution: 1920 x 1080
- Ultra Narrow Bezel
- Android 6.0.1
- 2 GB RAM, 8 GB EMMC+ 32 GB TF Card
- USB / RJ45 / Wi-Fi
- Designed for 24/7 Operation
- Metal frame, tempered glass











## INTERACTIVE DISPLAY

## **FEATURES**

## **ULTRA 4K RESOLUTION**

4K resolution is four times the resolution of 1080p and renders more detail.



#### **BUILT-IN WHITEBOARD SOFTWARE**

Abundant functionality includes powerful brush, 20-point IR touchscreen, infinite whiteboards, and more.



### ACCURATE ON-SCREEN WRITING

With the 1 mm writing accuracy rate, users will enjoy a better writing experience.



#### WIRELESS SCREEN MIRRORING

One-click for wireless projection of your PC or mobile phone. Multiscreen interaction among devices and the interactive tablet is made possible for convenient and efficient operation.



## PRODUCT LIST



Size: 65" DS-D5A65RB / A

- Resolution: UHD 4K resolution
- Dual OS, default Android, Window w / OPS optional
- 1 mm writing accuracy
- Built-in whiteboard software
- Screen mirroring via Wi-Fi
- Write and save notes on any page



Size: 75" DS-D5A75RB / A

- Resolution: UHD 4K resolution
- Dual OS, default Android, Window w / OPS ontional
- 1 mm writing accuracy
- Built-in whiteboard software
- Screen mirroring via Wi-Fi
- Write and save notes on any page



Size: 86" DS-D5A86RB / A

- Resolution: UHD 4K resolution
- Dual OS, default Android, Window w / OPS optional
- 1 mm write accuracy
- Built-in whiteboard software
- Screen mirroring via Wi-Fi
- Write and save notes on any page

# Vertical Solutions








# Education

Hikvision's educational display meets any teaching requirement, including safe monitoring, information display, interactive education, and much more.





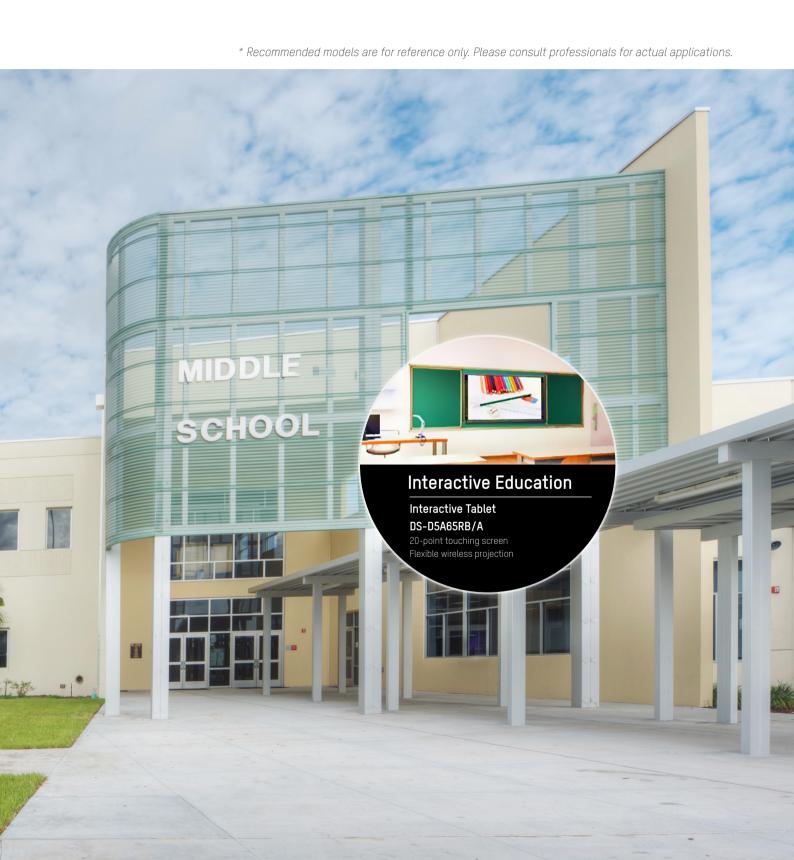

# REMARKABLE PERFORMANCE OUTSTANDING RELIABILITY HIKVISION COMMERCIAL DISPLAYS

## Hikvision Headquarters

No.555 Qianmo Road 310052 Hangzhou China T +86 571 88075998 sales@hikvision.com

## Hikvision Poland

The Park, Office Building A Krakowiaków 50 02-255 Warsaw, Poland T +48 22 4600150 info.pl@hikvision.com

## Hikvision Europe

Dirk Storklaan 3 2132 PX Hoofddorp The Netherlands T +31 23 5542770 info.eu@hikvision.com

#### **Hikvision Spain**

Calle de Almazara 9 28760 Tres Cantos Madrid, Spain T +34 91 7371655 info.es@hikvision.com

## Hikvision France

6 rue Paul Cézanne, 93360 Neuilly-Plaisance France T +33 (0)1 85330450 info.fr@hikvision.com

#### **Hikvision Czech**

BETA Building, Vyskocilova 1481/4, Prague 4 Czech Republic T +42 29 6182640 info.cz@bikvision.com

## Hikvision Italy

Via Abruzzo 12
Z.I. San Giacomo
31029 Vittorio Veneto
TV Italy
T +39 0438 6902
info it@bikvision.com

#### **Hikvision Germany**

Flughafenstr. 21 63263 Neu-Isenburg Zeppelinheim, Germany T +49 69 401507290 sales.dach@hikvision.com