

DS-3T1506HP-SI-4P2F Industrial Smart Managed PoE Switch



Smart managed switches are developed by Hikvision, featuring easy management and maintenance. You can easily deploy, monitor and expand your security system anytime and anywhere with our software platforms. You can view the network topology, monitor the health of the network and receive device alarms in real time, which greatly reduces the cost of network operation and maintenance.

- 4 x Gigabit Hi-PoE RJ45 Ports, 2 x Gigabit SFP Fiber Optical Ports
- Support 802.1Q VLAN.
- Support 802.3bt Hi-PoE, up to 90 W for ports 1 to 4
- Support STP/RSTP/ERPS loop prevention and storm control
- Support cable detection to locate failure
- Support SNMP, QoS, and DHCP snooping
- 6 kV Surge Protection
- Wider Temperature (-40 °C to 75 °C) Design
- Up to 300 m Long-range Transmission

▪ Specification

General	
Shell	Metal material, IP40
Net Weight	0.88 kg (1.94 lb)
Gross Weight	1.25 kg (2.75 lb)
Dimensions (W × H × D)	155.00 mm × 46.00 mm × 130.00 mm (6.10" × 1.81" × 5.12")
Operating Temperature	-40 °C to 75 °C (-40 °F to 167 °F)
Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
Operating Humidity	5% to 95% (no condensation)
Relative Humidity	5% to 95% (no condensation)
Power Supply	48 V to 57 V DC, 7.5 A
Installation Mode	Desk-Mounted,Rail
Max. Power Consumption	303 W
Power Consumption in Idle	3 W
Surge Protection	6 kV
Network Parameters	
Ports	4 × Gigabit PoE port,2 × Gigabit fiber optical port
MAC Address Table	8 K
Switching Capacity	Whole-Device Performance: 20 Gbps Port Performance: 12 Gbps
Packet Forwarding Rate	Whole-Device Performance: 14.88 Mpps Port Performance: 8.93 Mpps
Internal Cache	4.1 Mbits
PoE Power Supply	
PoE Standard	IEEE 802.3bt
PoE Power Pin	8-pin power: 1/2(-), 3/6(+), 4/5(-), 7/8(+)
Max. Port Power	90 W
PoE Port	Hi-PoE: Ports 1 to 4
PoE Power Budget	300 W
Software Function	
Long Range	Ports 1 to 4: up to 300 m. Long range performance may vary depend on camera model or cable condition.
Port Isolation	Ports 1 to 6: port isolation mode to improve network security Ports in an isolation group cannot communicate with each other, but they can communicate with ports outside the isolation group.
PoE Watchdog	Ports 1 to 4: auto detect and restart the cameras that do not respond.
Link Aggregation	Link aggregation is used to aggregate multiple physical ports to form a logical port for load balancing, bandwidth expansion, and port protection. Support static link aggregation. Support 8 aggregation group(s).
Loop Prevention	Loop prevention is used to prevent the switching network from forming loops, which will seriously affect network communication. Disabled by default. Support 802.1D STP. Support 802.1w RSTP. Support G.8032 ERPS.

VLAN	<p>VLAN is used for network scale planning and network health improvement.</p> <p>Support 802.1Q.</p> <p>Configurable VLAN ID from 1-4094.</p> <p>Support Trunk, Access port mode.</p> <p>Support Max. 4094 VLAN.</p>
QoS	<p>QoS is used to allocate bandwidth to different services so as to provide end-to-end service quality assurance.</p> <p>Support port-based priority configuration.</p> <p>Support SP, WRR priority schedule mode.</p>
HPP	<p>Support one-click activation and remote management via Hik-Partner Pro. Functions supported:</p> <ol style="list-style-type: none"> 1. Display the port rate. 2. Display the port bandwidth utilization rate. 3. Display the PoE power usage. 4. Display topology information. 5. Display the alarm status. 6. Restart ports and devices. 7. Enable port long-range mode. 8. Remotely upgrade the device.
System Maintenance	<p>Support device management via web.</p> <p>Support DHCP Client. Enabled by default for dynamic assignment of management IP addresses.</p> <p>Support Super IP, which is a fixed IP address (10.180.190.200) for direct access.</p> <p>Support management via Hik-Central Pro.</p> <p>Support remote management via Hik-Partner Pro.</p> <p>Support cable detection. Abnormal open circuits and short circuits as well as network cable length can be detected.</p> <p>Support 802.1ab LLDP for peer device discovery.</p> <p>Support SNMP v1/v2c for third-party management platform access.</p> <p>Support port mirroring for fault locating.</p>
Port Rate-Limiting	<p>Port rate-limiting is used for port bandwidth adjustment to prevent network congestion.</p>
Storm Control	<p>Storm control is used to prevent switch ports from being blocked by broadcast or multicast storms in the LAN, which may affect network communication.</p> <p>Support port rate limiting based on broadcast, multicast, and unknown unicast packets.</p>
DHCP Snooping	<p>DHCP Snooping can prevent unauthorized connections to DHCP servers from disrupting the network and affecting normal network communication, and only allow DHCP packets from trusted ports to pass through. Disabled by default.</p>
ACL	<p>Port security strategy.</p> <p>Support up to 64 ACL entries.</p> <p>Support up to 128 configuration rules under all ACL entries.</p>
IPSG	<p>IPSG can control the security of port access device.</p> <p>Support port, MAC, IP binding.</p> <p>Support 256 security entries.</p>


Approval

EMC	CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020), IC (ICES-003: Issue 7:2020), RCM (AS/NZS CISPR 32: 2015)
Safety	CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition)), CE-LVD (EN 62368-1: 2014+A11: 2017)
Chemistry	CE-RoHS (2011/65/EU), WEEE (2012/19/EU), Reach (Regulation (EC) No.1907/2006)

Key Component


Order Sap	Order Model	Type	Parameter
303703680	NDR-75-48	Industrial Power Supply	AC/DC Power Supply, Output 48V-55V, 0-1.6A, 75watts, Input 90-264VAC, 127-370VDC, DIN rail, -20~70°C
303703681	NDR-240-48	Industrial Power Supply	AC/DC Power Supply, Output 48V-55V, 0-5A, 240watts, Input 90-264VAC, 127-370VDC, DIN rail, -20~70°C
303703682	NDR-480-48	Industrial Power Supply	AC/DC Power Supply, Output 48V-55V, 0-10A, 480watts, Input 90-264VAC, 127-370VDC, DIN rail, -20~70°C

Typical Application

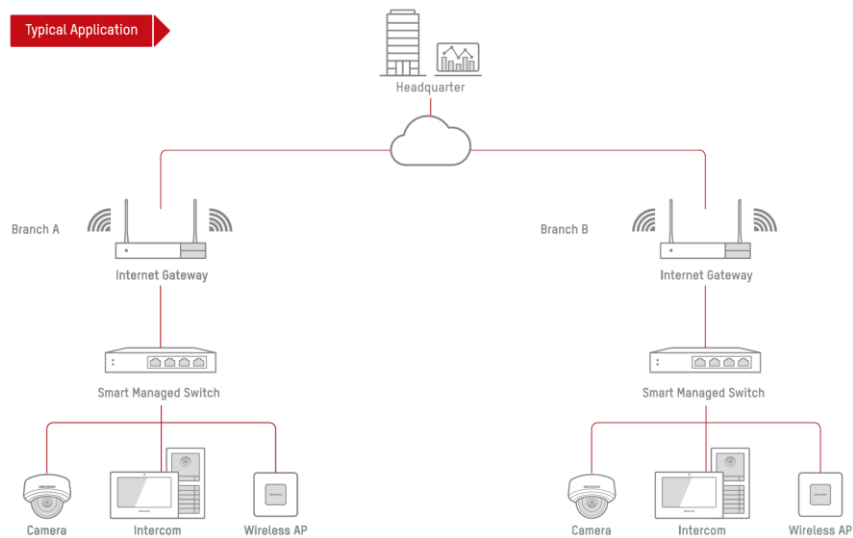


▪ Physical Interface

Front Panel

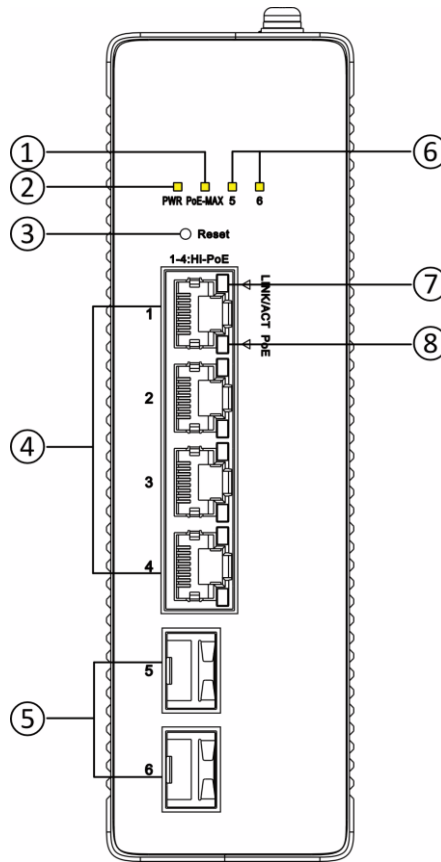


Rear Panel

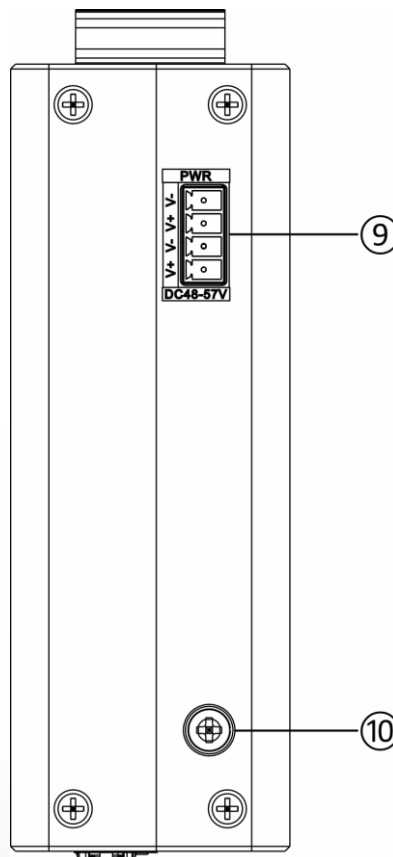

No.	Indicator/Port	Description
-----	----------------	-------------

①	PoE-MAX Indicator	<ul style="list-style-type: none"> ● Solid on: The output power of the switch is about to reach or has reached the upper limit. The power supply may be abnormal if more devices are connected. ● Unlit: The switch supplies power to a powered device (PD) normally and its output power does not reach the upper limit. Note: The PoE-MAX indicator will be unlit in 5 seconds after the output power of the switch returns to normal.
②	PWR Indicator	<ul style="list-style-type: none"> ● Solid on: The switch is powered on normally. ● Unlit: No power supply connected or power supply is abnormal.
③	Reset Button	Press and hold the reset button for more than 5 seconds to restore all the configurations of the switch to default settings.
④	Gigabit PoE RJ45 Port	Used for connection to a PD via a network cable. Note: Ports 1 to 4 of DS-3T1506HPSI- 4P2F are Hi-PoE RJ45 ports, which can be connected to high-power devices.
⑤	Gigabit SFP Fiber Optical Port	Used for connection to another device via an optical fiber when plugged into with an optical module.
⑥	Gigabit SFP Fiber Optical Port Indicator	<ul style="list-style-type: none"> ● Solid on: The gigabit SFP fiber optical port is connected. ● Flashing: The gigabit SFP fiber optical port is transmitting data. ● Unlit: The gigabit SFP fiber optical port is disconnected or connection is abnormal.
⑦	LINK/ACT Indicator	<ul style="list-style-type: none"> ● Solid on: The port is connected. ● Flashing: The port is transmitting data. ● Unlit: The port is disconnected or connection is abnormal.
⑧	PoE Indicator	<ul style="list-style-type: none"> ● Solid on: The switch provides power supply to a PD normally. ● Unlit: The switch is disconnected to a PD, or provides power supply to a PD abnormally.
⑨	DC Input Port	<p>Use a self-prepared industrial power supply (usually an integrated power adapter) to connect the switch's DC input port to a power socket.</p> <ol style="list-style-type: none"> 1. Insert the positive wires (+) and negative wires (-) into the 2-pin or 4-pin Phoenix connector sockets, and use a screwdriver to tighten the wires. Note: The positive wire (+) and negative wire (-) of the power cable must be consistent with the polarities of the connector sockets inside the DC input port. 2. Insert the Phoenix connector into the DC input port on the switch. 3. Connect the industrial power supply to an external power supply system.
⑩	Grounding Terminal	Used for connection to a grounding cable to protect the switch from lightning.

▪ **Dimension**

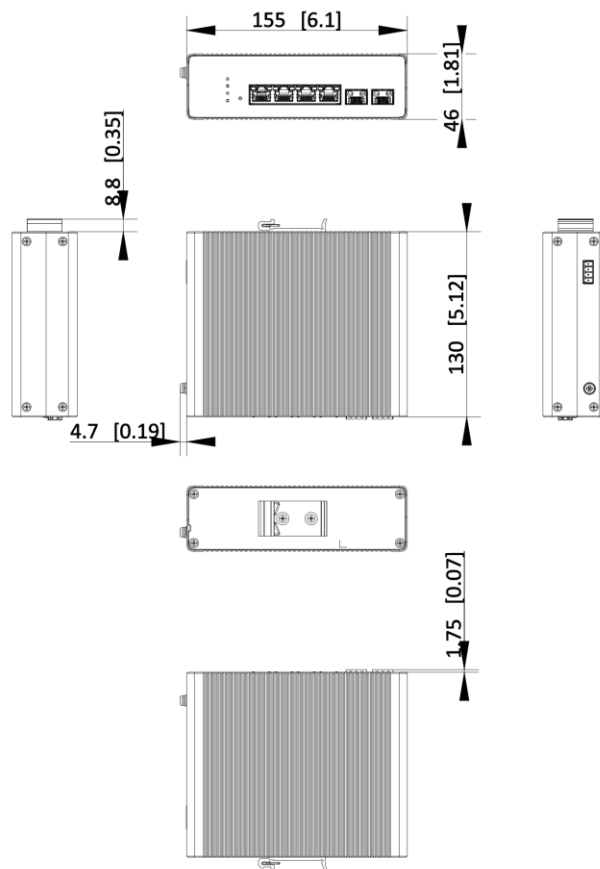

Unit: mm [inch]

SCALE	1:1
-------	-----

▪ **Accessory**

▪ **Optional**



See Far, Go Further



www.hikvision.com
support@hikvision.com

