

# DS-2DE7A232MW-AE (S5) 2 MP 32 × IR Network Speed Dome

## **Acu**Sense





















Hikvision DS-2DE7A232MW-AE (S5) 2 MP 32  $\times$  IR Network Speed Dome adopts 1/2.8" progressive scan CMOS chip. With the 32  $\times$  optical zoom lens, the camera offers more details over expansive areas.

This series of cameras can be widely used for wide ranges of high-definition, such as the rivers, roads, railways, airports, squares, parks, scenic spots, and venues, etc.

Empowered by deep learning algorithms, Hikvision AcuSense technology brings human and vehicle targets classification alarms to front- and back-end devices. The system focuses on human and vehicle targets, vastly improving alarm efficiency and effectiveness.

- Focuses on human and vehicle targets classification based on deep learning
- 1/2.8" progressive scan CMOS
- Up to 1920 × 1080 @ 30 fps resolution
- Excellent low-light performance with powered-by-DarkFighter technology
- 120dB WDR, 3D DNR, HLC, BLC, rapid focus
- 24 VAC & Hi-PoE
- Supports audio visual alarm. The white flashing light and audible warning can be triggered by certain events, and the warning content is selectable
- 32 × optical zoom, 16 × digital zoom
- Up to 200 m IR distance
- With the 5 W built-in speaker, the alarm sound within 30 m is no less than 60 dB
- Support face capture. Up to 5 faces captured at the same time





## Specification

- Specification Camera Module					
Image Sensor	1/2.8" progressive scan CMOS				
Min. Illumination	Color: 0.005Lux @ (F1.2, AGC ON), B/W: 0.001 Lux @ (F1.2, AGC ON), 0 Lux with IR				
Shutter Speed	1/1 s to 1/30000 s				
Slow Shutter					
	yes				
Focus	semi-auto, manual, auto				
Day & Night	ICR auto				
Day/Night Switch	auto				
BLC	yes				
WDR	120 dB WDR				
HLC	yes				
3D DNR	yes				
Defog	yes				
EIS	yes				
Regional Exposure	yes				
Regional Focus	yes				
mage Settings	saturation, brightness, contrast, sharpness				
White Balance	auto, ATW, sodium lamp, fluorescent lamp, indoor, outdoor, MWB, Locked WB				
Digital Zoom	16 ×				
Optical Zoom	32 ×				
Privacy Mask	up to 24 masks, polygon region, mosaic mask, mask color configurable				
SNR	> 52 dB				
	, 32 db				
Lens					
Focal Length	4.8 mm to 153 mm, 32 × Optical				
Zoom Speed	appro.4.2 s				
FOV	Horizontal field of view: 58.4° to 2.14° (wide-tele), Vertical field of view: 33.8° to 1.2° (wide-tele), Diagonal field of view: 65.6° to 2.46° (wide-tele)				
Aperture	F1.2				
PTZ					
Movement Range (Pan)	360°				
Movement Range (Tilt)	-15° to 90°(auto flip)				
Pan Speed	pan speed: configurable from 0.1° to 160°/s; preset speed: 240°/s				
Tilt Speed	tilt speed: configurable from 0.1° to 120°/s, preset speed 200°/s				
Proportional Zoom	yes				
Presets	300				
Patrol Scan	8 patrols, up to 32 presets for each patrol				
Pattern Scan					
Power-off Memory	4 pattern scans				
Park Action	yes preset, pattern scan, patrol scan, auto scan, tilt scan, random scan, frame scan,				
2D Docitioning	panorama scan				
BD Positioning	yes				
PTZ Status Display	yes				
Preset Freezing	yes				
Scheduled Task	preset, pattern scan, patrol scan, auto scan, tilt scan, random scan, frame scan, panorama scan, dome reboot, dome adjust, aux output				
Video					
Max. Resolution	1920 × 1080				
Stream Type	main stream, sub-stream, third stream				
Main Stream	50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720); 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)				
Sub-Stream	50Hz: 36fps (1926 × 1866, 1266 × 386, 1266 × 726) 50Hz: 25fps (704 × 576, 640 × 480, 352 × 288); 60Hz: 30fps (704 × 480, 640 × 480, 352 × 240)				
	50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 576, 640 × 480, 352 × 288);				
Third Stream					
	60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 480, 640 × 480, 352 × 240)				
Third Stream Video Compression Video Bit Rate					



H.265 Type	main profile				
H.264+					
H.265+	yes				
SVC	yes				
370	yes  dynamic face tracking, dynamic target tracking, main stream, sub-stream and third				
ROI	dynamic face tracking, dynamic target tracking, main stream, sub-stream and third stream respectively support eight fixed areas				
Audio					
Audio Compression					
Audio Bit rate	AAC: 16kbps, 32kbps, 64kbps, MP2L2: 32kbps, 40kbps, 48kbps, 56kbps, 64kbps, 80kbps, 96kbps, 112kbps, 128kbps, 144kbps, 160kbps, 192kbps				
Audio Sampling Rate	MP2L2: 16kHz, 32kHz, 48kHz, AAC: 16kHz, 32kHz, 48kHz, PCM: 8kHz, 16kHz, 32kHz, 48kHz				
Environment Noise Filtering	yes				
Smart Features					
Face Capture	yes				
Basic Event	audio exception, motion detection, video tampering alarm, alarm input, alarm output, exception				
Smart Event	intrusion detection, line crossing detection, region entrance detection, region exiting detection, unattended baggage detection, object removal detection				
Smart Tracking	manual tracking, event tracking, auto-tracking				
Smart Record	ANR, Dual-VCA				
Alarm Linkage	preset, patrol scan, pattern scan, memory card video recording, alarm output, sending email, notify surveillance center, upload to FTP, white light flashing, audible warning				
Perimeter Protection	Line crossing, intrusion, region entrance, region exiting Support alarm triggering by specified target types (human and vehicle)				
Network					
Network Storage	NAS (NFS, SMB/CIFS), ANR				
Protocols	IPv4/IPv6, HTTP, HTTPS, 802.1x, Qos, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTCP, RTP, TCP/IP, DHCP, PPPoE, UDP, IGMP, ICMP, Bonjour				
API	Open-ended API, ONVIF (Profile S, Profile G), ISAPI, Hikvision SDK, Third-party management platform, ISUP				
Simultaneous Live View	20				
User/Host	32				
Smooth Streaming					
Security Measures	yes Authenticated username and password, MAC address binding, HTTPS encryption, 802.1X authenticated access, IP address filter				
Client	iVMS-4200				
Web Browser	IE 8 to 11, Chrome 57+, Firefox 52+, Safari 12+				
Interface	TE O to 11, Gillottic 377, FileTox 327, Juliul 121				
Communication Interface	RJ45, self-adaptive 10M/100M Ethernet port				
On-board Storage	support microSD/microSDHC/microSDXC cards, up to 256 GB				
Alarm Input	2 alarm inputs				
Alarm Output	1 alarm output				
Audio Input	1 audio input, 2.0 to 2.4Vp-p, 1k Ohm±10%				
Audio Output	1 audio input, 2.0 to 2.4γp-p, 1k Offini±10%  1 audio output, line level, impedance: 600 Ω				
·	1 addio odtput, iiie ievel, iiipedalice. 000 12				
Supplement Light IR Distance	200 m				
	200 m				
Visual Alarm	30 m				
General	24.740 11: 0. 5				
Power	24 VAC, Hi-PoE				
Power Interface	tail type				
Power Consumption and Current	max. 42 W (including max. 18 W for IR and max. 10 W for heater)				
Operating Conditions	humidity: $\leq$ 90%, temperature: -30°C to 65°C (-22°F to 149°F)				
Reset	yes				
Demist	yes				
Material	ADC12				
Dimensions	Φ220 mm × 363.3 mm (Φ 8.66" × 13.91")				
Weight	Approx. 5 kg (11.03 lb)				
Web Client Language	English				
one chic rangaage					




Approval	
Protection	IP66, IK10 (excluding glass window), 6000V Lightning Protection, Surge Protection and
	Voltage Transient Protection


#### - DORI

The DORI (detect, observe, recognize, identify) distance gives the general idea of the camera ability to distinguish persons or objects within its field of view. It is calculated based on the camera sensor specification and the criteria given by EN 62676-4: 2015.

DORI	Detect	Observe	Recognize	Identify
Definition	25 px/m	63 px/m	125 px/m	250 px/m
Distance (Tele)	2046.9 m (6715.5 ft)	812.3 m (2665.0 ft)	409.4 m (1343.2 ft)	204.7 m (671.6 ft)

#### Dimension

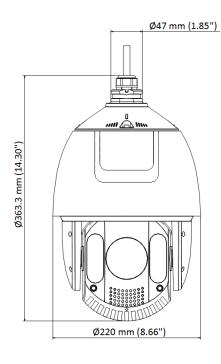



### Accessory

## Optional



DS-1604ZJ-Box-Corner Wall Mount with Junction Box





DS-1602ZJ Wall Mount





DS-1604ZJ-Box Wall Mount with Junction Box





DS-1604ZJ Wall Mount





DS-1682ZJ Extendable Pole for Pendant Mount



DS-1661ZJ Pendant Mount



DS-1660ZJ Parapet Wall Mount



DS-1005KI USB Joy-stick

DS-1604ZJ-pole Vertical Pole Mount



DS-1663ZJ Ceiling Mount



DS-1662ZJ Pendant Mount



HKA-A24250-230(EU) HKKD-12077(USA) HKA-A24250-230-BS(UK) PSE-A1525/5060(JP) Power Adapter

DS-1604ZJ-Box-Pole

Vertical Pole Mount with

Junction Box



DS-1681ZJ Installation Adapter



DS-1667ZJ Extendable Pole for Pendant Mount



LAS60-57CN-RJ45 Hi-PoE midspan

DS-1604ZJ-Corner Corner Mount



DS-1673ZJ Horizontal Pole Mount



DS-1619ZJ Gooseneck Mount



DS-1100KI Network Keyboard

\*DS-1673ZJ should be used with DS-1661ZJ or DS-1602ZJ.

#### Available Model

DS-2DE7A232MW-AE (S5)



Distributed by

Diotributou by

**HIKVISION**°

#### Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T+1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T +61-2-8599-4233 salesau@hikvision.com

Hikvision India T+91-22-28469900 sales@pramahikvision.com

Hikvision Canada T+1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T +662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T+601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33[0]1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T+82-{0}31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T +62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com

© Hikvision Digital Technology Co., Ltd. 2020 | Data subject to change without notice |