




Quick Installation Guide

90W/60W PoE Injector

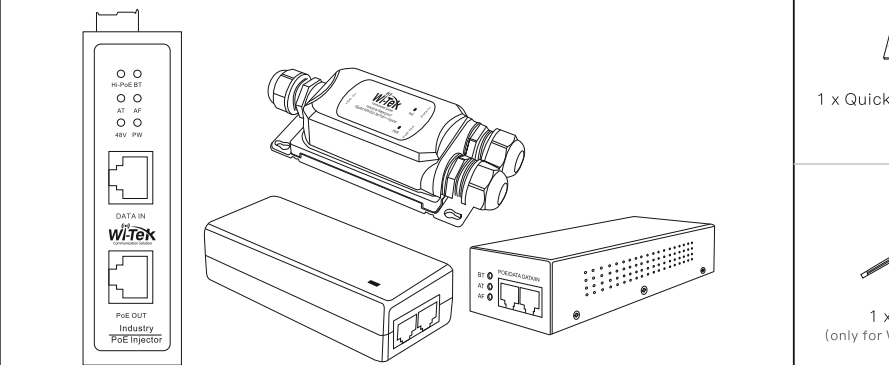


WI-POE58-BT(V2) | WI-POE58-BT-I-DC |
WI-POE55-48V-60W | WI-POE56-60W-I-O | WI-POE65-2.5G-60W(V2)

www.wireless-tek.com

1. Package Contents

Take WI-POE56-60W-I-O as an example

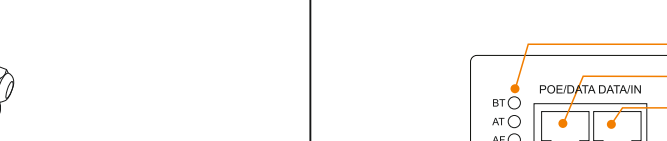

1 x Injector



1 x Quick installation Guide



1 x Wrench
(only for WI-POE56-60W-I-O)



1 x Ground Wire
(only for WI-POE56-60W-I-O)



1 x Screw Driver
(only for WI-POE58-BT-I-DC)



1 x Wall-mounting Accessory
(only for WI-POE58-BT-I-DC)



3 x M22 Waterproof Gland
(only for WI-POE56-60W-I-O)



1 x AC Power Cord
(only for WI-POE58-BT(V2)
WI-POE65-2.5G-60W(V2))


2. Appearance Overview

WI-POE58-BT(V2)

• Front panel



• Back panel

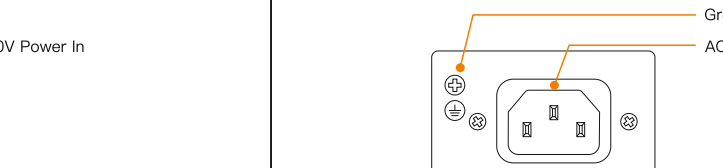


• LED indicator


LED Indicators	Description
AF	On: The protocol for PD is 802.3af Off: The protocol for PD is not 802.3af
AT	On: The protocol for PD is 802.3at Off: The protocol for PD is not 802.3at
BT	On: The protocol for PD is 802.3bt Off: The protocol for PD is not 802.3bt

WI-POE65-2.5G-60W(V2)

• Front panel

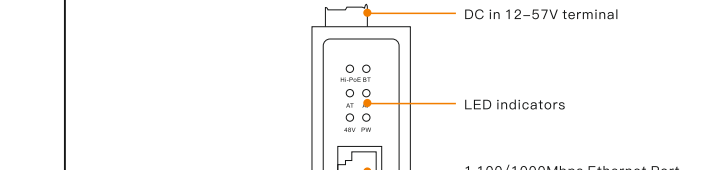

• Back panel

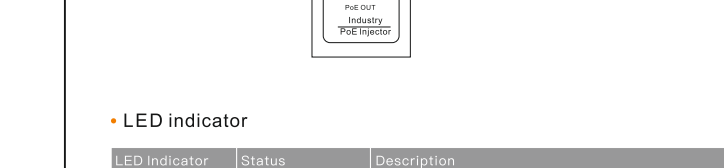

• LED indicator

LED Indicators	Description
AF	On: The protocol for PD is 802.3af Off: The protocol for PD is not 802.3af
AT	On: The protocol for PD is 802.3at Off: The protocol for PD is not 802.3at
BT	On: The protocol for PD is 802.3bt Off: The protocol for PD is not 802.3bt

WI-POE58-BT-I-DC

• Front panel




• LED indicator


LED Indicators	Description
Power	On: the device power on is normal Off: the device is power off or failed

WI-POE55-48V-60W

• Front panel

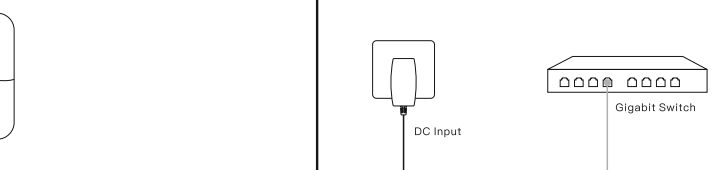

• Back panel

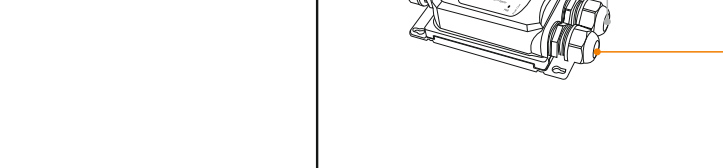

• LED indicator

LED Indicators	Description
Power	On: the device power on is normal Off: the device is power off or failed

WI-POE56-60W-I-O

• Front panel



• LED indicator

LED	Color	Status	Description
PWR: Power	Green	On	Power on
		Off	Power off
PoE	Green: PoE mode	On	It is currently in 802.3bt PoE mode and PD connection is successful
		Off	No PD connection
	Orange: UPoE mode	On	It is currently in UPoE mode and PD connection is successful
		Off	No PD connection

WI-POE58-BT-I-DC

• Front panel



• LED indicator

LED Indicators	Description
Power	On: the device power on is normal Off: the device is power off or failed

WI-POE55-48V-60W

• Front panel



• Back panel



• LED indicator

LED Indicators	Description
Power	On: the device power on is normal Off: the device is power off or failed


3. Accessories Installation

For WI-POE56-60W-I-O


Step 1: Disassemble the waterproof gland




Step 2: Turn the body of waterproof gland to the RJ45 ports and tighten it by the wrench. Pick a cable and run through the sealing insert and clamping nut.

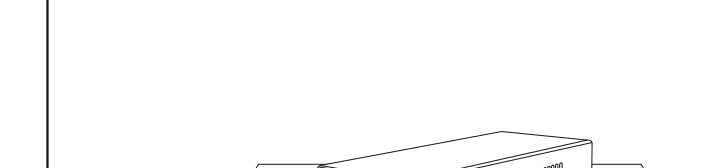


Step 3: Plug the cable into the port.

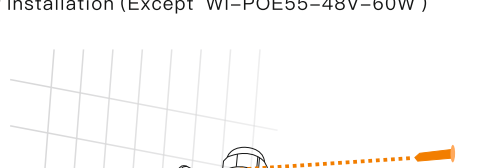


Step 4: Insert the sealing insert into the waterproof gland body.

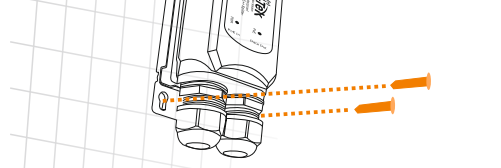


Step 5: Attach the clamping nut to the waterproof gland to complete assembly.

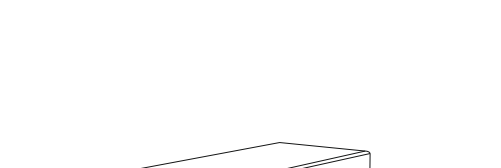

Step 6: Check it and make sure it is tightly installed.

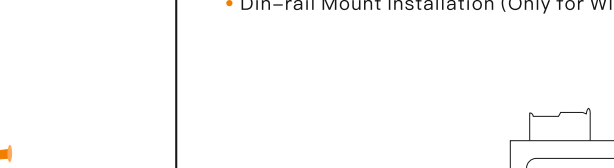

Step 7: Repeat Step 1 to Step 6 for other ports.

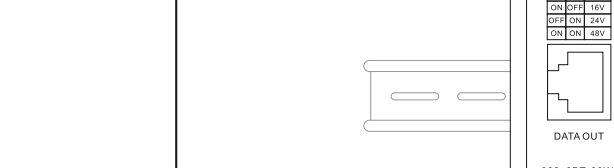


4. Installation

• Wall-mount Installation (Except WI-POE55-48V-60W)



• Desktop Installation

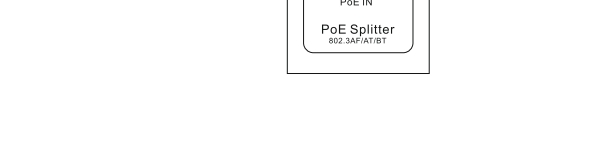

Warranty Card

Username	
Address	
Telephone No.	
Purchase Shop	
Purchase Address	
Product Model No.	
Purchase Time	
Serial No.	
Dealer Signature	

• If the product defects within the warranty period, we will provide professional maintenance service.
• Proof of purchase and a complete product serial number are required to receive any services guaranteed as part of the limited warranty.
• Any other defects that are not caused by workmanship or product quality, such as natural disasters, water damage, extreme thermal or environmental conditions, sticker damaged, warranty card loss will disqualify the product from limited warranty.



Wireless-Tek Technology Limited
Address: Building 3, Units 1801-1807, 1812, Huaqiang Era Plaza, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen City, Guangdong Province, China.
Website: www.wireless-tek.com
Tel: 86-0755-32811290
Email: sales@wireless-tek.com
Technical Support: tech@wireless-tek.com

