

## Instruction Manual Smart Socket



FR



EU



UK

English

WORKS WITH alexa

WORKS WITH Google Assistant



• Bitte scannen Sie den QR-Code, um das deutsche Handbuch, das Installationsvideo und die Funktionseinführung zu erhalten

• Escanee el código QR para obtener el manual en español, el vídeo de instalación y la introducción de la función

• Veuillez scanner le code QR pour obtenir le manuel en français, la vidéo d'installation et l'introduction des fonctions

• Отсканируйте QR-код, чтобы получить руководство на русском языке, видео по установке и описание функций

• Leia o código QR para obter o manual em português, o vídeo de instalação e a introdução das funções

### Product Description

This newly designed wall socket is designed with WiFi protocol to replace the traditional wall socket. The APP has newly added new pairing mode with Bluetooth enabled, panel indicator mode and relay status setting (power on, power off, power off memory), switch log, child lock, current statistics, overcurrent protection, etc. Enter Smart Life/Tuya App, all control modes are effective without any interference. Its design is suitable for different decoration styles, which is really great value for money.

### Safety Information

Risk of Electric Shock:Electricity can cause personal injury and property damage if handled improperly.If you are not sure about any part of these instructions,please seek professional assistance from a qualified electrician.

#### Technical Parameters:

Model: WK-EU(FR/UK)16M  
Voltage: 95~245V AC, 50/60Hz  
Wireless Protocol: WiFi 802.11 b/g/n 2.4GHz  
Max. Current(pure resistive load): 16A  
Max. Load Power: 3000W

#### Warnings:

Turn off the power at the circuit breaker and test that power is off before wiring.

### Installation

**Note:**

- Install the switch with electricity off.
- Do not install in damp environment.
- Neutral wire in not required(single live line).
- Do not exceed the maximum load.
- Please follow instructions and properly install.
- If you don't have any wiring experience,please call a professional electrician.

**Step 1**

- Turn off the circuit breaker and use the electrical tester to test the power.
- Ensure the switch is off before wiring.




**Attention:**

Please disconnect the power supply before installing or removing the device for avoiding irreversible damage on the device from the electric current or some unpredictable problems such as lamp flashing.

**Step 2**

- Remove the old switch



**Step 3**


- Remove the switch and pull it away from the wall.
- Identify Line/Load Wire(Note:The color of your wire may be different from the color shown on the manual.)

**Verify power is off**

- We recommend you remove the faceplate from the old switch and use an electrical tester to test all wires connected to the switch to ensure there is no voltage in the circuit.
- You may need to turn off more than one circuit breaker.

**Step 4**

- Take pictures of the wiring

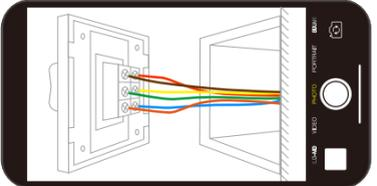



• Follow the wiring diagram to connect the switch wires to the wires in the wall box with the wire conductors.

**Step 5**

- Remove the panel with screwdriver (Please don't install with electricity power on)




**Step 6**

- Preparing to install wiring
  - A. Connect the live wire to the "L" terminal
  - B. Connect the neutral wire to the "N" terminal
  - C. Connect the ground wire to the "G" terminal
- EU/FR
 
- UK
 

**Step 7**

- Put the switch into switch box in the wall
- Mount the two side screws
- Install the glass panel (install from up above)
- Finish installation



### Add Devices

1 Download Smart Life App



Please scan the QR code or download Smart Life on App store.

**2 Registration or Log in**

- Download "Smart Life" Application
- Enter the Register/Login interface;tap "Register" to create an account by entering your phone number to get verification code and "Set password".Choose "Log in" if you already have a Smart Life account.

**3 Configure the APP to the switch**


- Preparation: Ensure the switch has been connected with electricity,ensure your phone has been connected to Wi-Fi and is able to connect to the Internet.

**Note:**

The switch only supports 2.4G network.If you have connected 5G network,please disconnect 5G network firstly and connect 2.4G network.

**Wi-Fi link method:**  
Pair and clear up the WiFi code(New Updated)

- 1.Make sure your phone is connected to Wi-Fi and Bluetooth. Long press the button for 6s until the blue indicator light flashed fast
- 2.Open Smart Life/Tuya App and Click"+",then the prompt page will automatically show on the screen.Click "Go to add".

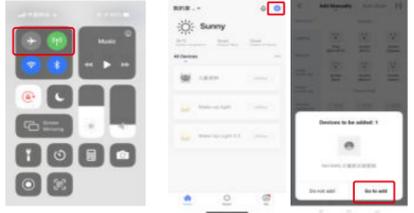


(1) (2)


3.Select the device you want to add and click "Add"



4.Enter Wi-Fi Password and click "Confirm",waiting for completing the connection.



5.Add the device successfully, you can edit the name of the device to enter the device page by click "Done"



### How to reset/repair Wi-Fi code

Press and hold the button for about 6 seconds,until the blue indicator on the switch flash fast after 3 seconds.Reset/repair is successful.

### Set your Echo speaker by Alexa APP

- 1 If you have finished installing Smart Life,just open Amazon Alexa App;log into your Alexa account with password.
- 2 Click the menu on the top left -click "settings",choose "Set up a new device"(choose a device like Echo)

**Note:**

When below page appears,long press the small dot on your Echo device until the light turns to yellow.Then click "Continue"on the App.


Attention:The mobile phone can not open a variety of VPN software.

- 3 Choose your own Wi-Fi and wait for a few minutes.After watching an introduction video,click "next step",then it will enter Home page automatically.Now the Echo has been connected to Wi-Fi successfully.

### Enter Smart Life Skill in Alexa APP

1. Complete product networking configuration in the App Complete the device's networking configuration according to the prompts in the App. Note: In the App, change the name of the device to an easily identifiable name such as Alexa; names are usually in English, such as "bed light".
2. Configure the Amazon Echo device (If you have already configured Amazon Echo, you can skip this step. The following instructions are based on the iOS client.)
  - Make sure you Amazon Echo device is powered on and connected to a Wi-Fi network.
  - Open the Alexa App on your phone. After successful login, tap on the menu in the upper left corner of the Home page, select "Settings" and tap "Set Up A New Device" to set up the Amazon Echo.
  - Choose your Amazon Echo device type and language for connecting. Press and hold the small dot on the device until the light turns yellow. Then tap "Continue" to connect to the hotspot.

• After connecting to the Amazon Echo hotspot, return to the page. At this point, the connection is successful.




Tap "Continue" to proceed to the next step. Choose a Wi-Fi network to connect to. Amazon Echo will take a few minutes to try to connect to the network.

•After the network connection is successful, tap "Continue". An introduction video will appear. After the video ends, tap "Continue" to jump to the Alexa Home page. You have now completed the Amazon Echo's configuration process.

3. Key step —— Link Skill

- Tap on "Skills" in the Alexa App menu.



- Then search for "App Name". Tap "Enable" to enable the Skill.
- Enter the App account and password, then tap "Link Now" to link your App account to enable the Skill. Now you can start your smart home journey.

4. Common commands

Control the device via voice commands, now you can control your smart device with Echo. You can control your device (such as your bedroom light) with the following commands:

Alexa, turn on/off bedroom light. (Turn on/off the light)  
Alexa, set bedroom light to 50 percent. (Set the light to any brightness)  
Alexa, brighten/dim bedroom light. (Increase/weaken the brightness of the light)  
Alexa, set bedroom light to green. (Adjust the color of the light)

### SERVICE

- 1.During the free warranty period, if the product breaks down during normal use, we will offer free maintenance for the product.
- 2.Natural disasters/man-made equipment failures, disassembly and repair without the permission of our company, no warranty card, products beyond the free warranty period, etc., are not within the scope of free warranty
- 3.Any commitment (oral or written) made by the third party (including the dealer/service provider) to the user beyond the warranty scope shall be executed by the third party
- 4.Please keep this warranty card to ensure your rights
- 5.Our company may update or change the products without notice. Please refer to the official website for the updates.

### RECYCLING INFORMATION

All products marked with the symbol for separate collection of waste electrical and electronic equipment (WEEE Directive 2012/19 / EU) must be disposed of separately from unsorted municipal waste. To protect your health and the environment, this equipment must be disposed of at designated collection points for electrical and electronic equipment designated by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences for the environment and human health. To find out where these collection points are and how they work, contact the installer or your local authority.



### WARRANTY CARD

#### Product Information

Product Name \_\_\_\_\_  
Product Type \_\_\_\_\_  
Purchase date \_\_\_\_\_  
Warranty Period \_\_\_\_\_  
Dealer Information \_\_\_\_\_  
Customer's Name \_\_\_\_\_  
Customer Phone \_\_\_\_\_  
Customer Address \_\_\_\_\_

#### Maintenance Records

Failure date	Cause Of Issue	Fault Content	Principal

BB14

English