

## iDS-E04HUHI-XB

### 4-ch 5MP 1U H.265 eSSD AcuSense DVR

#### Key Feature

- Powered by M-SATA eSSD technology
- Deep learning based human and vehicle targets classification of Motion Detection 2.0
- Deep learning-based perimeter protection
- Scene-adaptive bitrate control video compression
- Up to 8 MP@8 fps encoding capability
- Low power consumption
- Audio via coaxial cable



#### Built-In SSD

- Minimalist eSSD design brings low power consumption
- Integrated storage design provides the plug-and-play device use

#### Easy Installation

- Mini size design saves installation space
- Anti-vibration design and light weight satisfy more installation conditions

#### Compression and Recording

- Scene-adaptive bitrate control technology would precisely allocate videos in eSSD according to the actual scene
- Full channel recording at up to 5 MP Lite resolution

#### Smart Function


- Deep learning-based motion detection 2.0
- Deep learning-based perimeter protection
- Smart search for efficient playback

## ▪ Specification


Model		IDS-E04HUHI-XB
<b>Motion Detection 2.0</b>	Human/Vehic le Analysis	Deep learning-based motion detection 2.0 is enabled by default for all analog channels, it can classify human and vehicle, and extremely reduce false alarms caused by objects like leaves and lights; Quick search by object or event type is supported;
	<b>Perimeter Protection</b>	Human/Vehic le Analysis Up to 4-ch
<b>Recording</b>	Video Compression	H.265 Pro/H.265
	Encoding Resolution	8 MP/5 MP/3K/4 MP/3 MP/1080p/720p/WD1/4CIF/CIF
	Frame Rate	Main stream: 8 MP@8 fps/3K@12 fps/5 MP@12 fps/4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF@25 fps (P)/30 fps (N) *: 8 MP@8 fps is only available for channel 1. Sub-stream: WD1/4CIF/CIF@25 fps (P)/30 fps (N)
	Video Bitrate	According to the actual scene, scene-adaptive bitrate control technology would automatically allocates appropriate bitrate to ensure the stability of recording period.
	Stream Type	Video, Video & Audio Note: In order to protect privacy, the device will only record video (without audio) by default. If you want to record audio, you shall manually enable audio recording. For operation details, refer to the user manual.
	Audio Compression	G.711u
	Audio Bitrate	64 Kbps
<b>Video and Audio</b>	IP Video Input	2-ch Up to 8 MP resolution Support H.265 IP cameras
	Analog Video Input	4-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
	HDTVl Input	8 MP@15 fps, 8 MP@12.5 fps, 3K@20 fps, 5 MP@20 fps, 5 MP@12.5 fps, 4 MP@30 fps, 4 MP@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@30 fps, 720p@25 fps, 720p50, 720p60

	AHD Input	5 MP@20 fps, 4 MP@30 fps, 4 MP@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@30 fps, 720p@25 fps
	HDCVI Input	8 MP@15 fps, 8 MP@12 fps, 5 MP@20 fps, 4 MP@30 fps, 4 MP@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@30 fps, 720p@25 fps
	CVBS Input	Support
	HDMI Output	1-ch, 2K (2560 × 1440)/60Hz, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz
	VGA Output	1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz
	Video Output Mode	HDMI/VGA simultaneous output
	Audio Input	4-ch via coaxial cable
	Audio Output	1-ch via HDMI
	Synchronous Playback	4-ch
<b>Network</b>	Total Bandwidth	96 Mbps
	Remote Connection	Incoming bandwidth: 8 Mbps 32
	Network Protocol	TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, NFS, UPnP™, HTTPS
	Network Interface	1, RJ45 10/100 Mbps self-adaptive Ethernet interface
<b>Auxiliary Interface</b>	Capacity	Built-in 1024 GB eSSD (960 GB available) Note: The device can store about 2 weeks videos for 4-ch analog cameras (default parameters), this estimation is for reference only
	Alarm In/Out	OPTIONAL 4/1
	USB Interface	Rear panel: 2 × USB 2.0
<b>General</b>	Power Supply	12 VDC, 1 A
	Consumption	≤ 7.5 W (with eSSD)
	Working Temperature	-10 °C to 45 °C (14 °F to 113 °F)
	Working Humidity	10% to 90%
	Dimension (W × D × H)	151 × 121 × 46 mm (5.94 × 4.76 × 1.81 inch)
	Weight	≤ 0.5 kg (with eSSD, 1.1 lb.)

Dimension

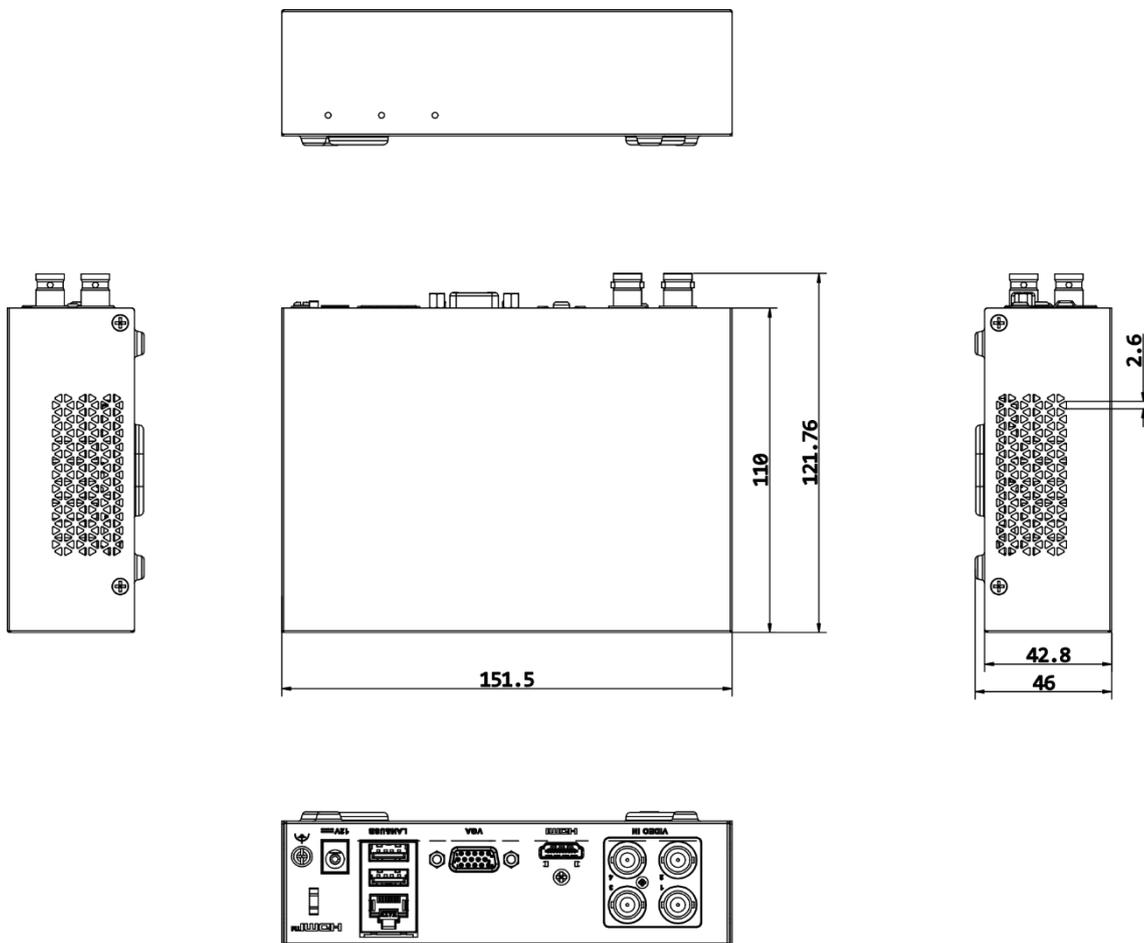


scale/1:1;Unit/mm

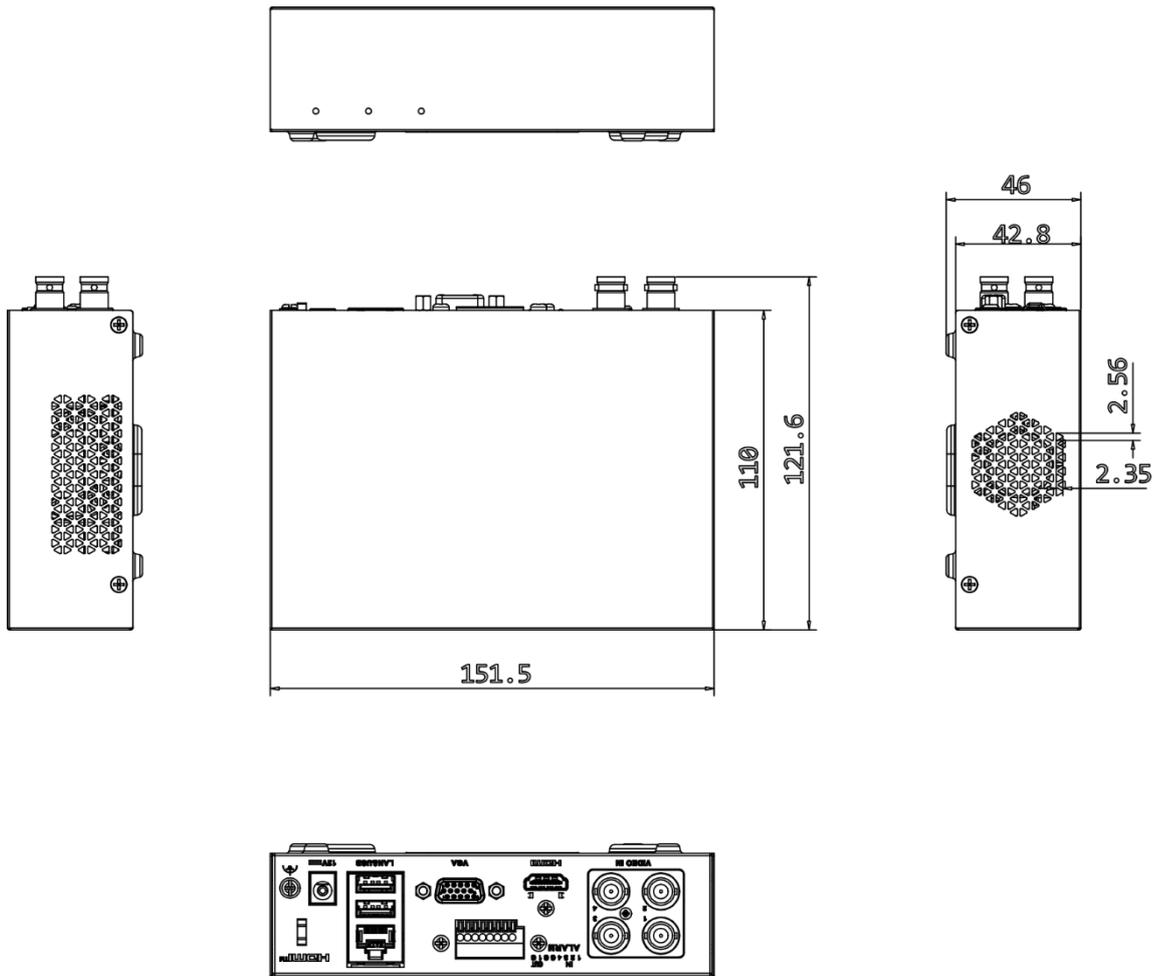


scale/1:1;Unit/mm

## Physical Interface

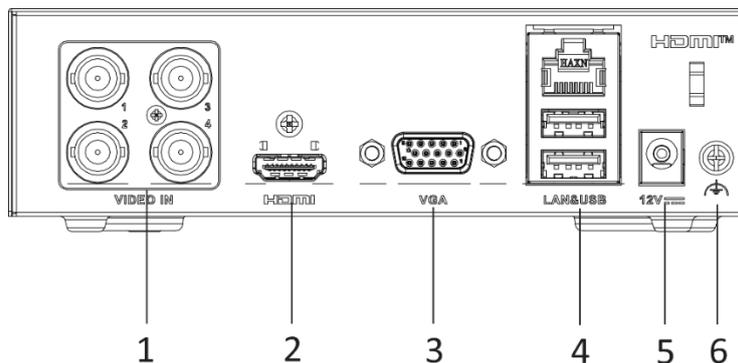

No.	Description	No.	Description
1	Video and coaxial audio in	4	LAN network interface and USB interface
2	HDMI interface	5	Power supply
3	VGA interface	6	GND

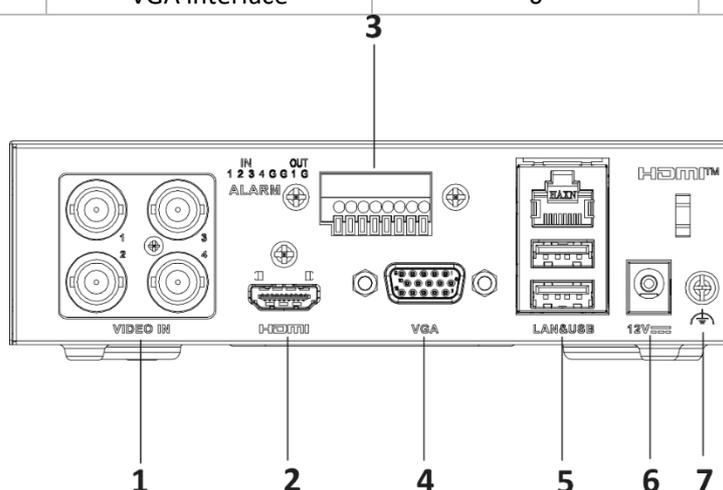

No.	Description	No.	Description
1	Video and coaxial audio in	5	LAN network interface and USB interface
2	HDMI interface	6	Power supply
3	Alarm in and out	7	GND
4	VGA interface		

## Available Model

iDS-E04HUHI-XB

iDS-E04HUHI-XB/报警 4/1

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

